BAR Case #2012-0043

ADDRESS OF PROJECT: 702-704 King Street

TAX MAP AND PARCEL: 074.02-10-10 ZONING: KR

APPLICATION FOR: *(Please check all that apply)*

☒ CERTIFICATE OF APPROPRIATENESS

☐ PERMIT TO MOVE, REMOVE, ENCAPSULATE OR DEMOLISH
(Required if more than 25 square feet of a structure is to be demolished/impacted)

☐ WAIVER OF VISION CLEARANCE REQUIREMENT and/or YARD REQUIREMENTS IN A VISION CLEARANCE AREA (Section 7-802, Alexandria 1992 Zoning Ordinance)

☐ WAIVER OF ROOFTOP HVAC SCREENING REQUIREMENT
(Section 6-403(B)(3), Alexandria 1992 Zoning Ordinance)

Applicant: ☐ Property Owner ☒ Business *(Please provide business name & contact person)*

Name: Nando's of Alexandria, LLC
By: M. Catharine Puskar
Walsh, Colucci, Lubeley, Emrich & Walsh, PC

Address: 2200 Clarendon Boulevard, Suite 1300

City: Arlington State: VA Zip: 22201

Phone: 703-528-4700 E-mail: cpuskar@arl.thelandlawyers.com

Authorized Agent *(if applicable)*: ☒ Attorney ☐ Architect ☐ _____

Name: M. Catharine Puskar Phone: 703-528-4700

E-mail: cpuskar@arl.thelandlawyers.com

Legal Property Owner:

Name: Eleventh Hour, LLC
c/o Scott McElhaney, Managing Member

Address: P. O. Box 7437

City: Arlington State: VA Zip: 22201

Phone: 703-528-4700 E-mail: scott@arlingtonproperty.net

☐ **Yes** ☒ **No** Is there an historic preservation easement on this property?
☐ **Yes** ☒ **No** If yes, has the easement holder agreed to the proposed alterations?
☐ **Yes** ☒ **No** Is there a homeowner's association for this property?
☐ **Yes** ☒ **No** If yes, has the homeowner's association approved the proposed alterations?

If you answered yes to any of the above, please attach a copy of the letter approving the project.

FEB 2 1 2012

BAR Case # 2012-0043

NATURE OF PROPOSED WORK: *Please check all that apply*

- ☐ NEW CONSTRUCTION
- ☒ EXTERIOR ALTERATION: *Please check all that apply.*
  - ☐ awning ☐ fence, gate or garden wall ☐ HVAC equipment ☐ shutters
  - ☒ doors ☐ windows ☐ siding ☐ shed
  - ☒ lighting ☐ pergola/trellis ☐ painting unpainted masonry
  - ☒ other Repainting an already painted facade and millwork on trims.
- ☐ ADDITION
- ☐ DEMOLITION/ENCAPSULATION
- ☒ SIGNAGE

DESCRIPTION OF PROPOSED WORK: *Please describe the proposed work in detail (Additional pages may be attached).*

Nando's Peri-Peri is proposed to occupy the space at 702-704 King Street, previously occupied by Popeyes fried chicken. (A pending SUP application is scheduled for hearings in March.)

New work to the existing facade will consist of new paint finishes on existing brick work, windows, and millwork trims. New doors, signage, and signage lighting are also proposed with this application. Finally, new millwork trim work to replace existing trims which had deteriorated, and a new millwork facia and crown trim to replace the existing Popeyes' awning are included in this submission. [See continuation on attached sheet.]

SUBMITTAL REQUIREMENTS:

Items listed below comprise the **minimum supporting materials** for BAR applications. Staff may request additional information during application review. Please refer to the relevant section of the *Design Guidelines* for further information on appropriate treatments.

Applicants must use the checklist below to ensure the application is complete. Include all information and material that are necessary to thoroughly describe the project. Incomplete applications will delay the docketing of the application for review. Pre-application meetings are required for all proposed additions. All applicants are encouraged to meet with staff prior to submission of a completed application.

Electronic copies of submission materials should be submitted whenever possible.

Demolition/Encapsulation : *All applicants requesting 25 square feet or more of demolition/encapsulation must complete this section. Check N/A if an item in this section does not apply to your project.*

	N/A	
☐	☒	Survey plat showing the extent of the proposed demolition/encapsulation.
☐	☒	Existing elevation drawings clearly showing all elements proposed for demolition/encapsulation.
☐	☒	Clear and labeled photographs of all elevations of the building if the entire structure is proposed to be demolished.
☐	☒	Description of the reason for demolition/encapsulation.
☐	☒	Description of the alternatives to demolition/encapsulation and why such alternatives are not considered feasible.

DESCRIPTION OF PROPOSED WORK
(Continued)

The only modification to the existing façade's configuration occurs at the 2 entry niches where the existing faux brick veneer wall does not speak to historical values. Instead, a millwork partition with board and batten grid was introduced in a more orthogonal approach versus the previous angled layout. Below the existing bay storefront (to remain), new millwork board and trims will clad over the existing oversized brick below sill. This modification will serve to revive some of the historic character of the building in context with the storefronts along King Street.

BAR Case # 2012-0043

Additions & New Construction: *Drawings must be to scale and should not exceed 11" x 17" unless approved by staff. All plans must be folded and collated into 12 complete 8 1/2" x 11" sets. Additional copies may be requested by staff for large-scale development projects or projects fronting Washington Street. Check N/A if an item in this section does not apply to your project.*

	N/A	
☐	☒	Scaled survey plat showing dimensions of lot and location of existing building and other structures on the lot, location of proposed structure or addition, dimensions of existing structure(s), proposed addition or new construction, and all exterior, ground and roof mounted equipment.
☐	☒	FAR & Open Space calculation form.
☐	☒	Clear and labeled photographs of the site, surrounding properties and existing structures, if applicable.
☐	☒	Existing elevations must be scaled and include dimensions.
☐	☒	Proposed elevations must be scaled and include dimensions. Include the relationship to adjacent structures in plan and elevations.
☐	☒	Materials and colors to be used must be specified and delineated on the drawings. Actual samples may be provided or required.
☐	☒	Manufacturer's specifications for materials to include, but not limited to: roofing, siding, windows, doors, lighting, fencing, HVAC equipment and walls.
☐	☒	For development site plan projects, a model showing mass relationships to adjacent properties and structures.

Signs & Awnings: *One sign per building under one square foot does not require BAR approval unless illuminated. All other signs including window signs require BAR approval. Check N/A if an item in this section does not apply to your project.*

	N/A	
☒	☐	Linear feet of building: Front: 28' Secondary front (if corner lot): N/A.
☐	☒	Square feet of existing signs to remain: N/A.
☒	☐	Photograph of building showing existing conditions.
☒	☐	Dimensioned drawings of proposed sign identifying materials, color, lettering style and text.
☒	☐	Location of sign (show exact location on building including the height above sidewalk).
☒	☐	Means of attachment (drawing or manufacturer's cut sheet of bracket if applicable).
☒	☐	Description of lighting (if applicable). Include manufacturer's cut sheet for any new lighting fixtures and information detailing how it will be attached to the building's facade.

Alterations: *Check N/A if an item in this section does not apply to your project.*

	N/A	
☒	☐	Clear and labeled photographs of the site, especially the area being impacted by the alterations, all sides of the building and any pertinent details.
☒	☐	Manufacturer's specifications for materials to include, but not limited to: roofing, siding, windows, doors, lighting, fencing, HVAC equipment and walls.
☒	☐	Drawings accurately representing the changes to the proposed structure, including materials and overall dimensions. Drawings must be to scale.
☐	☒	An official survey plat showing the proposed locations of HVAC units, fences, and sheds.
☐	☒	Historic elevations or photographs should accompany any request to return a structure to an earlier appearance.

BAR Case # 2012-0043

ALL APPLICATIONS: *Please read and check that you have read and understand the following items:*

[x] I have submitted a filing fee with this application. (Checks should be made payable to the City of Alexandria. Please contact staff for assistance in determining the appropriate fee.)

[X] I understand the notice requirements and will return a copy of the three respective notice forms to BAR staff at least five days prior to the hearing. If I am unsure to whom I should send notice I will contact Planning and Zoning staff for assistance in identifying adjacent parcels.

[X] I, the applicant, or an authorized representative will be present at the public hearing.

[X] I understand that any revisions to this initial application submission (including applications deferred for restudy) must be accompanied by the BAR Supplemental form and 12 sets of revised materials.

The undersigned hereby attests that all of the information herein provided including the site plan, building elevations, prospective drawings of the project, and written descriptive information are true, correct and accurate. The undersigned further understands that, should such information be found incorrect, any action taken by the Board based on such information may be invalidated. The undersigned also hereby grants the City of Alexandria permission to post placard notice as required by Article XI, Division A, Section 11-301(B) of the 1992 Alexandria City Zoning Ordinance, on the property which is the subject of this application. The undersigned also hereby authorizes the City staff and members of the BAR to inspect this site as necessary in the course of research and evaluating the application. The applicant, if other than the property owner, also attests that he/she has obtained permission from the property owner to make this application.

APPLICANT OR AUTHORIZED AGENT:

Signature: M. Catharine Puskar by EM

Printed Name: M. Catharine Puskar

Date: 2/21/12

OWNERSHIP AND DISCLOSURE STATEMENT
Use additional sheets if necessary

1. Applicant. State the name, address and percent of ownership of any person or entity owning an interest in the applicant, unless the entity is a corporation or partnership, in which case identify each owner of more than ten percent. The term ownership interest shall include any legal or equitable interest held at the time of the application in the real property which is the subject of the application.

Name	Address	Percent of Ownership
1. Nando's Restaurant	819 7th Street, NW	Owns 100% of Applicant
2. Group, Inc. Owned By:	Washington, DC 20001	Entity
3. Nando's Restaurant Group Holdings BV		There are no owners of 10% or greater.

2. Property. State the name, address and percent of ownership of any person or entity owning an interest in the property located at 702-704 King Street (address), unless the entity is a corporation or partnership, in which case identify each owner of more than ten percent. The term ownership interest shall include any legal or equitable interest held at the time of the application in the real property which is the subject of the application.

Name	Address	Percent of Ownership
1. Eleventh Hour, LLC	c/o Scott McElhaney P. O. Box 7434	
2. Scott McElhaney	Arlington, VA 22207	50% Ownership
3. Lisa McElhaney	Same	50% Ownership

3. Business or Financial Relationships. Each person or entity listed above (1 and 2), with an ownership interest in the applicant or in the subject property is required to disclose **any** business or financial relationship, as defined by Section 11-350 of the Zoning Ordinance, existing at the time of this application, or within the12-month period prior to the submission of this application with any member of the Alexandria City Council, Planning Commission, Board of Zoning Appeals or either Boards of Architectural Review.

Name of person or entity	Relationship as defined by Section 11-350 of the Zoning Ordinance	Member of the Approving Body (i.e. City Council, Planning Commission, etc.)
1. Nando's Restaurant Group, Inc.	Applicant	None
2. Eleventh Hour, LLC		
3. Scott McElhaney Lisa McElhaney	Owner	None

NOTE: Business or financial relationships of the type described in Sec. 11-350 that arise after the filing of this application and before each public hearing must be disclosed prior to the public hearings.

As the applicant or the applicant's authorized agent, I hereby attest to the best of my ability that the information provided above is true and correct.

2/21/12	M. Catharine Puskar	M. Catharine Puskar by EM
Date	Printed Name	Signature

FEB 2 1 2012

Nando's Peri-Peri

@704 King Street, Alexandria VA 22314

City of Alexandria - B.A.R. submission
February 21st, 2012

HapstakDemetriou+
ARCHITECTURE | DESIGN

jackstone SIGNS

HapstakDemetriou+

3247 Q Street, NW
Suite 200
Washington, DC 20007

202.333.9038 P
202.333.6888 F
www.hd-ad.com
info@hd-ad.com

ARCHITECTURE | DESIGN

HSK-0

Nando's Peri Peri

Nando's Alexandria
Existing Conditions

Project Number 11020.00
Printed 2/21/12

© HapstakDemetriou+, pllc

HapstakDemetriou+

3247 Q Street, NW
Suite 200
Washington, DC 20007

202.333.9038 P
202.333.6888 F
www.hd-ad.com
info@hd-ad.com

ARCHITECTURE | DESIGN

HSK-0.5

Nando's Peri Peri

Nando's Alexandria
Existing Storefronts

Project Number 11020.00
Printed 2/21/12

© HapstakDemetriou+, pllc

1 EXISTING FRONT ELEVATION
SCALE: 1/4" = 1'-0"

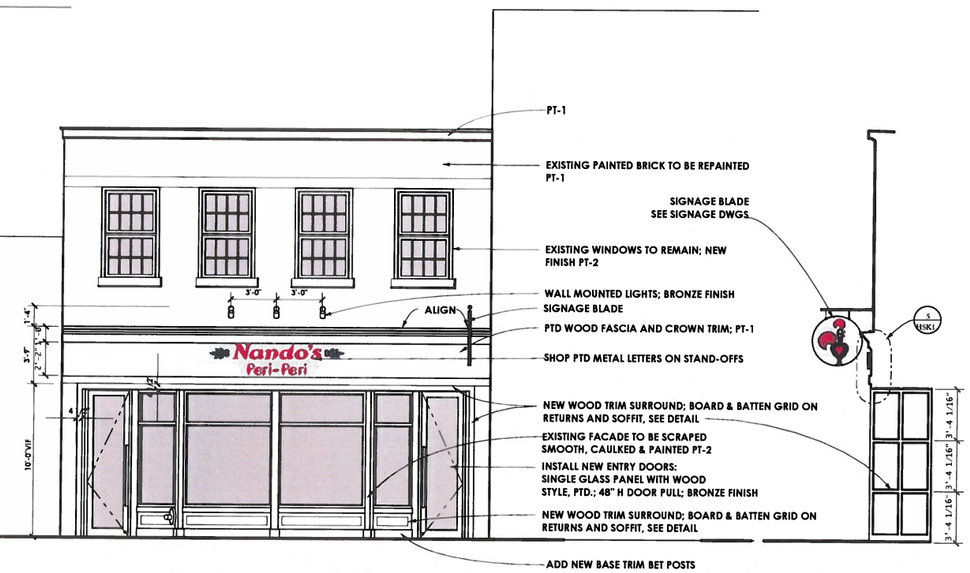

2 PROPOSED FRONT ELEVATION
SCALE: 1/4" = 1'-0"

3 SIDE VIEW HANGING SIGN
SCALE: 1/4" = 1'-0"

4 SIGNAGE DETAIL ELEVATION
SCALE: 1" = 1'-0"

1. SIGNAGE TO CONFORM TO THE CITY OF ALEXANDRIA, VIRGINIA GUIDELINES
2. WIDTH OF STREET FRONTAGE: 28 LINEAR FEET; MAXIMUM ALLOWABLE SIGNAGE AREA: 28 SQUARE FEET
   FLAT SIGN: (18) SQUARE FEET
   HANGING: 30" DIAMETER (LESS THAN 5 SQ FT)
3. WALL SIGN: PTD LETTERS TO BE PIN MOUNTED TO WOOD FASCIA WITH HIDDEN FASTENERS.
4. HANGING SIGN BRACKET AND MOUNTING HARDWARE TO BE METAL PAINTED BLACK.
SEE DRAWINGS DETAILS & SPECS FROM SIGNAGE MNANUFACTURER

B-K LIGHTING
Quality to Last a Lifetime™

WALL MNTD SIGN LIGHT: BK LIGHTING "MINI MICRO" SIGN LIGHT
SOLID STATE (BKSSL)
#SN-36-L-MM-LED-e38-FL-BLP-12-11-A-PC-L10M-120
FINISH: BLACK MATTE
LAMP: LED WITH 2.7K WARMEST AVAILABLE (CRI: 90)

Products / 05 Signlights

Mini Micro™ Sign Light
Solid State (BKSSL™)

Measuring just one inch in diameter, Mini Micro™ is our smallest signlight and features an elegant transition from stem to fixture.

The Mini Micro™ Sign Light incorporates BKSSL™ technology for years of energy efficient service and includes our exclusive Locking O' Ring Compression Knuckle (L.O.C.K.™) ensures precision optical alignment.

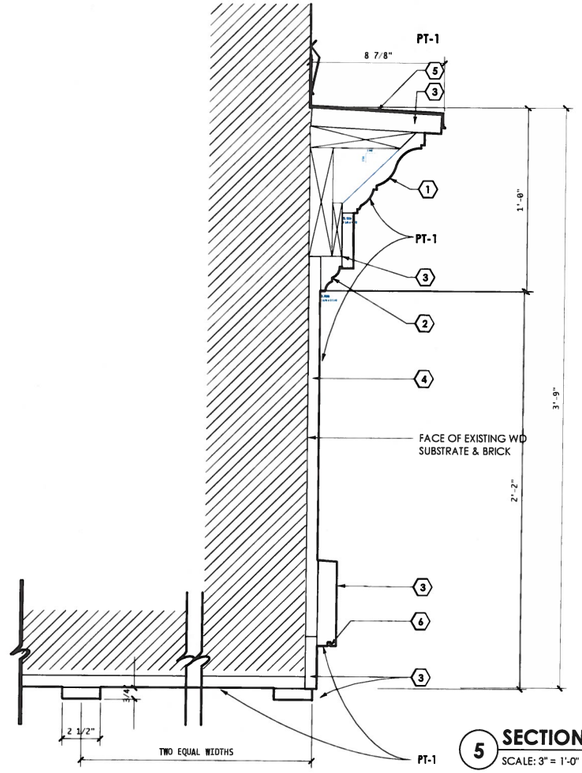

5 SECTION DETAIL
SCALE: 3" = 1'-0"

KEY NOTES

1. GREENWICH COLLECTION EXTERIOR CROWNS # IL E03
2. GREENWICH COLLECTION EXTERIOR CROWNS # IL E08
3. EXTERIOR GRADE PTD WOOD
4. 3/4" THICK MDO PANEL
5. BRONZE ANODIZED FLASHING & COUNTERFLASHING; CALUK TO EXISTING MASONRY TO MATCH
6. DRIP

FINISH NOTES

PT-1 BENJAMIN MOORE HISTORIC COLORS
"KENDALL CHARCOAL" # HC-166
• EXISTING PAINTED BRICK & WINDIWS SILLS TO RECEIVE:
(1) PRIME COAT. (2) FINISH COATS FLAT
• NEW WOOD FASCIA, CROWN , & SOFFIT
TO RECEIVE:
(1) PRIME COAT. (2) FINISH COATS SEMIGLOSS

PT-2 BENJAMIN MOORE HISTORIC COLORS
BLACK, SEMIGLOSS
ON WINDOW UNITS, CASING TRIM, BAY WINDOW, AND ENTRY DOORS; ALL WOOD TRIM BELOW SOFFIT

HSK-1

Nando's Peri Peri
Nando's Alexandria
Elevation /Architectural Details

Project Number 11020.00
Printed 2/21/12

© HapstakDemetriou+ pllc

HapstakDemetriou+
3247 Q Street, NW
Suite 200
Washington, DC 20007
202.333.9038 p
202.333.6888 f
www.hd-ad.com
info@hd-ad.com
ARCHITECTURE | DESIGN

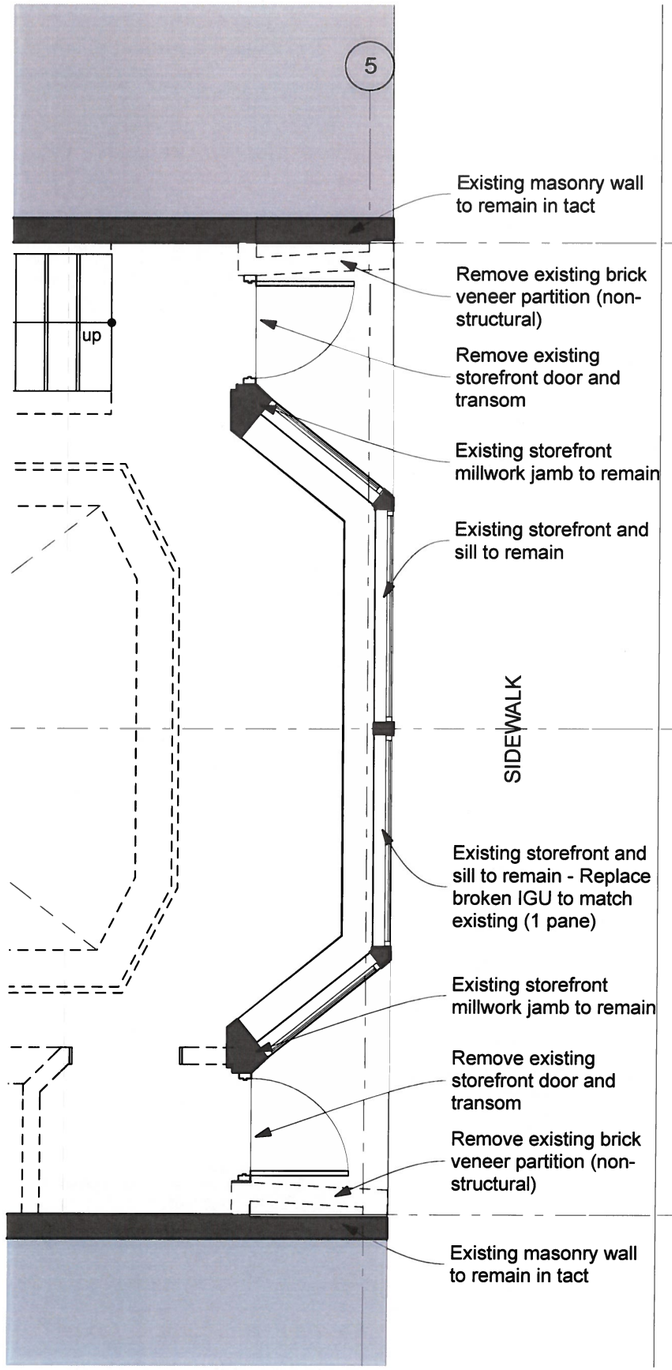

1 Storefront Demo - First Floor
Scale:1/4" = 1'-0"

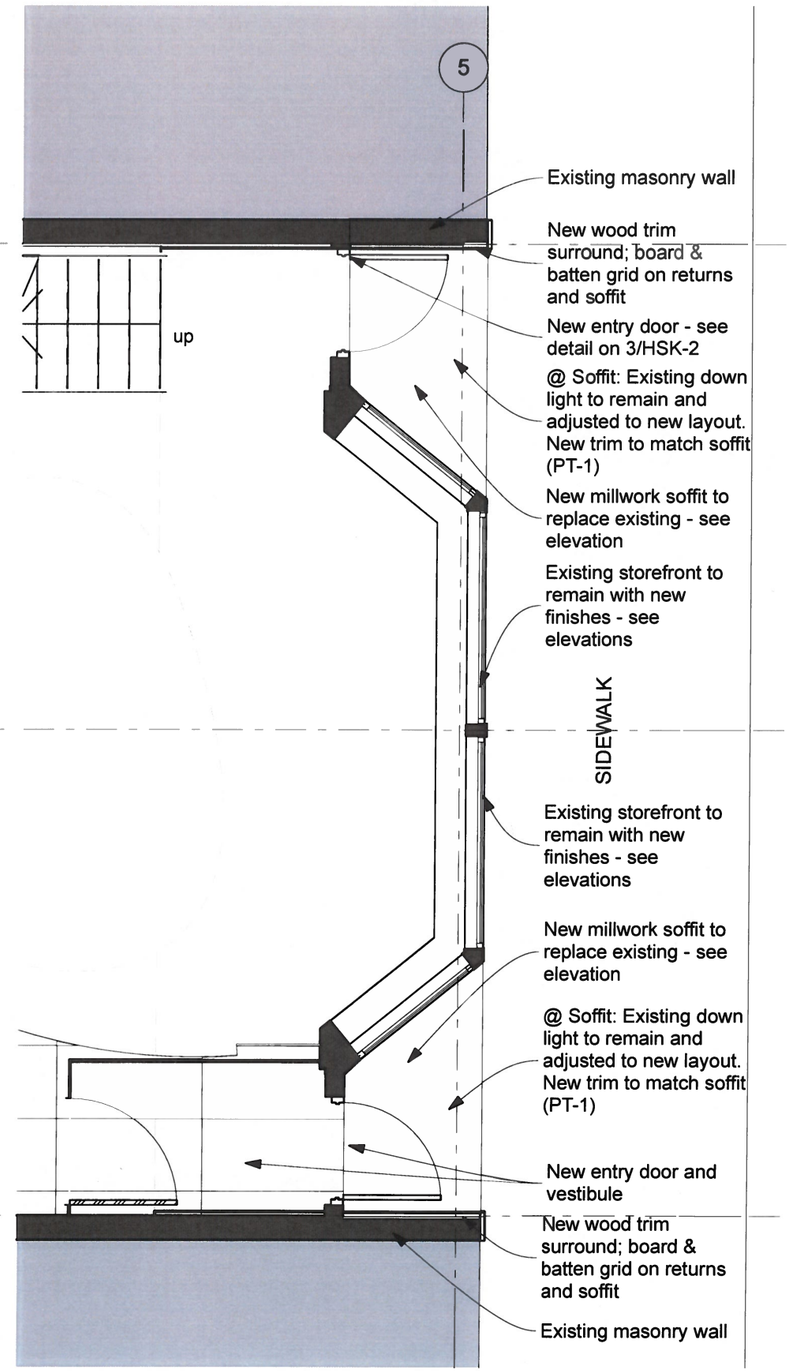

2 Storefront New work - First Floor
Scale:1/4" = 1'-0"

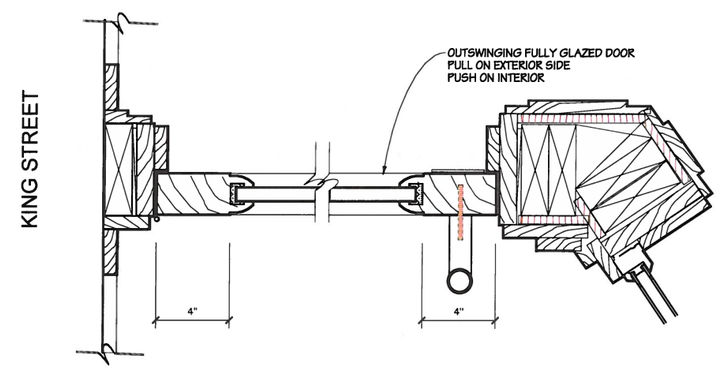

3 Door Jamb detail
Scale:6" = 1'-0"

HSK-2

Nando's Peri Peri
Nando's Alexandria
Plans (Proposed new layout)

Project Number 11020.00
Printed 2/21/12

© HapstakDemetriou+, pllc

HapstakDemetriou+
3247 Q Street, NW
Suite 200
Washington, DC 20007
P 202.333.9038
F 202.333.6888
www.hd-ad.com
info@hd-ad.com
ARCHITECTURE | DESIGN

REMOTE-LIT CHANNEL LETTERS & D/F BLADE

STOREFRONT ELEVATION 1/4" = 1'-0"

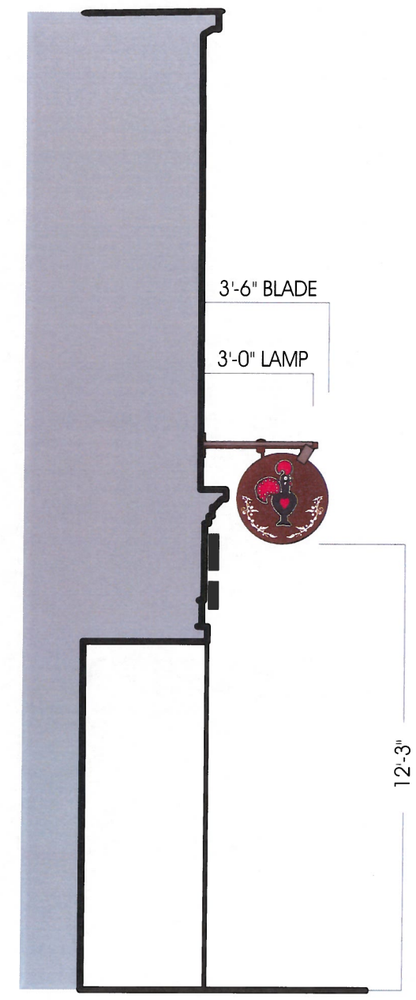

SIDE VIEW 1/4" = 1'-0"

HSK-3

JackStoneSigns JACKSTONESIGNS.COM
3131 Pennsy Drive, Landover, MD 20785 / phone (301) 322-3323 / fax (301) 322-8407

CUSTOMER	Nando's - Alexandria
ADDRESS	702-704 King Street
CITY	Alexandria
STATE	VA
FILE NAME	Nando's_Alexandria (cnl's-blade)

DWG. NO.	9639
SCALE	Noted
DATE	02/17/12
DESIGNER	jw
CONTACT	Trevor Stone

Notice: This drawing is an original design created by Jack Stone Sign Company, and is submitted for use in conjunction with this project only. This drawing cannot be duplicated, altered, or exhibited in any fashion without authorization from Jack Stone Sign Company. This drawing remains the property of Jack Stone Sign Company and any unauthorized use or exhibition will result in a design fee.

REQUIRED ELECTRICAL SERVICE TO SIGN LOCATION IS TO BE PROVIDED BY OTHERS

REVISIONS

2/21/12 LL inc. blade projection

2/21/12 LL reduce blade size & move down; show menu cabinet

CUSTOMER APPROVAL (PLEASE PRINT FULL NAME)

SIGNATURE AND DATE

REMOTE-LIT CHANNEL LETTERS & D/F BLADE

PTD. TO MATCH PMS 186

PTD. TO MATCH PMS 342

PTD. MATTE BLACK

3" DEEP ALUM. REVERSE CHANNEL LETTERS PINNED ½" OFF WOOD FASCIA

* WATERPROOF/CAULK ALL BUILDING PENETRATIONS



ELEVATION - CHANNEL LETTERS 3/4" = 1'-0"
QTY: (1) SET 18 S.F.

SIDE VIEW - CHANNEL LETTERS 3/4" = 1'-0"

ALL ATTACHMENTS TO BRICK FACADE: 3/8" ST.ST. BOLTS W/ DBL. EXPANSION SHIELDS INTO MORTAR JOINTS, 5" EMBEDDED

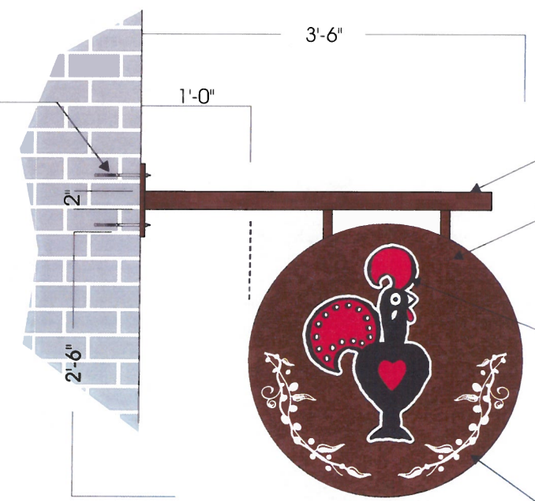

2" x 2" ALUM. MTG. TUBE WELDED TO ½" THICK 8" x 8" MTG. PLATE, ALL PTD. AGED ANTIQUE COPPER FINISH

2" DEEP ALUM. SIGN CABINET PTD. AGED ANTIQUE COPPER FINISH

ROUTED OUT GRAPHIC BACKED W/ 1/8" #7328 WHITE PLEXI FACE 3M 230-33 RED & 3M 220-12 BLACK VINYL OVERLAY

ROUTED OUT VINES BACKED W/ 1/8" #7328 WHITE PLEXI FACE

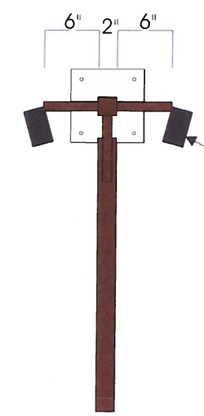

(2) 10w VISION3 'FL11' LAMPS W/ BLACK FINISH

ELEVATION - BLADE SIGN 3/4" = 1'-0"
QTY: (1) 6.2 S.F.

SIDE VIEW - BLADE SIGN 3/4" = 1'-0"

HSK-4

JackStoneSigns JACKSTONESIGNS.COM
3131 Pennsy Drive, Landover, MD 20785 / phone (301) 322-3323 / fax (301) 322-8407

CUSTOMER	Nando's - Alexandria
ADDRESS	702-704 King Street
CITY	Alexandria
STATE	VA
FILE NAME	Nando's_Alexandria (cnl's-blade)

DWG. NO.	9639
SCALE	Noted
DATE	02/17/12
DESIGNER	jw
CONTACT	Trevor Stone

Notice: This drawing is an original design created by Jack Stone Sign Company, and is submitted for use in conjunction with this project only. This drawing cannot be duplicated, altered, or exhibited in any fashion without authorization from Jack Stone Sign Company. This drawing remains the property of Jack Stone Sign Company and any unauthorized use or exhibition will result in a design fee.

REQUIRED ELECTRICAL SERVICE TO SIGN LOCATION IS TO BE PROVIDED BY OTHERS

REVISIONS

2/21/12 LL inc. blade projection
2/21/12 LL reduce blade size

CUSTOMER APPROVAL (PLEASE PRINT FULL NAME)

SIGNATURE AND DATE

HapstakDemetriou+

3247 Q Street, NW
Suite 200
Washington, DC 20007

202.333.9038 P
202.333.6888 F
www.hd-ad.com
info@hd-ad.com

ARCHITECTURE | DESIGN

HSK-5

Nando's Peri Peri

Nando's Alexandria
Front Perspective - New Work

Project Number 11020.00
Printed 2/21/12

© HapstakDemetriou+, pllc

HapstakDemetriou+

3247 Q Street, NW
Suite 200
Washington, DC 20007

202.333.9038 P
202.333.6888 F
www.hd-ad.com
info@hd-ad.com

ARCHITECTURE | DESIGN

HSK-6

Nando's Peri Peri

Nando's Alexandria
Street Perpective - New work

Project Number 11020.00
Printed 2/21/12

© HapstakDemetriou+, pllc

IL GREENWICH COLLECTION | EXT. CROWNS



IL E08
1 3/8 x 2 1/4

1 Crown small trim 3
Scale:1' = 1'-0"

IL GREENWICH COLLECTION | EXT. CROWNS

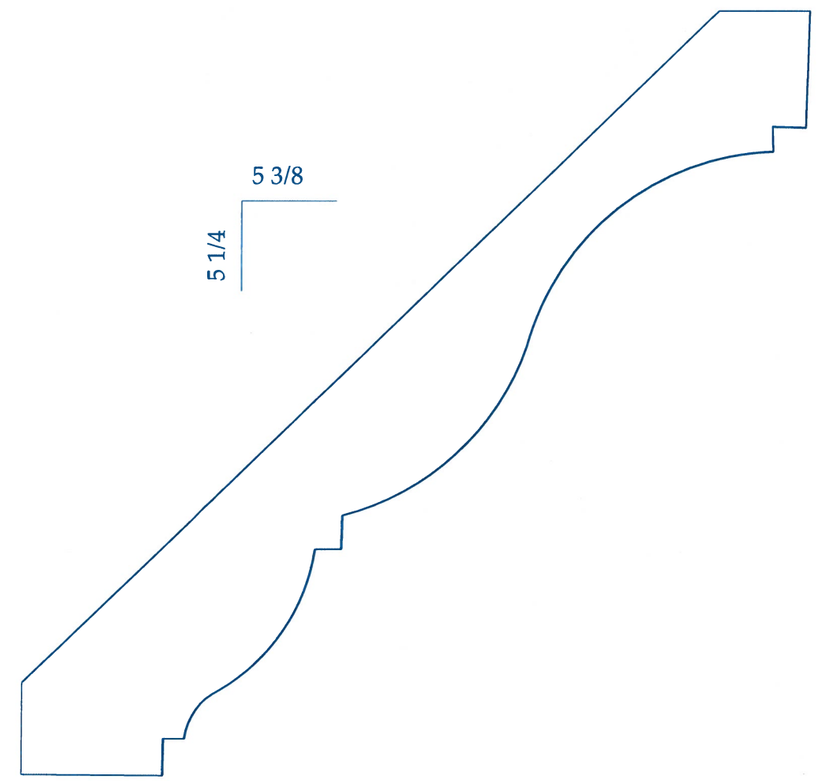

IL E03
1 1/8 x 7 1/2

2 Crown
Scale:1' = 1'-0"

HSK-7

Nando's Peri Peri

Nando's Alexandria
Crown Profiles

Project Number 11020.00
Printed 2/21/12

© HapstakDemetriou+ pllc

HapstakDemetriou+
3247 Q Street, NW
Suite 200
Washington, DC 20007
P 202.333.9038
F 202.333.6888
www.hd-ad.com
info@hd-ad.com
ARCHITECTURE | DESIGN

MINI-MICRO SIGNLIGHT™ SN-MM | 3 WATT

SIGNLIGHTS

Measuring just one inch in diameter, Mini-Micro™ is our smallest signlight and features an elegant transition from stem to fixture. The addition of our exclusive Locking 'O' Ring Compression Knuckle (L.O.C.K.™) ensures precision optical alignment. Keyword SN-MM

OPTICS: Spot, Flood, Rectilinear
CCT: 3K 4K, R A G B
MATERIAL: ALU
VOLTAGE: 12V, 120-277V

Shown with 'B' Cap in Satin Aluminum (SAP) finish



6 WATT | ST-MM MINI-MICRO TWIN SIGNLIGHT™

Like its single counterpart, our Mini-Micro Twin Signlight™ measures just one inch in diameter. The twin has two fully adjustable fixtures that provide for wider coverage from a single mounting position while the 'T' style adapter provides a clean, 90° transition from fixtures to stem. Keyword ST-MM

OPTICS: Spot, Flood, Rectilinear
CCT: 3K 4K, R A G B
MATERIAL: ALU
VOLTAGE: 12V, 120-277V

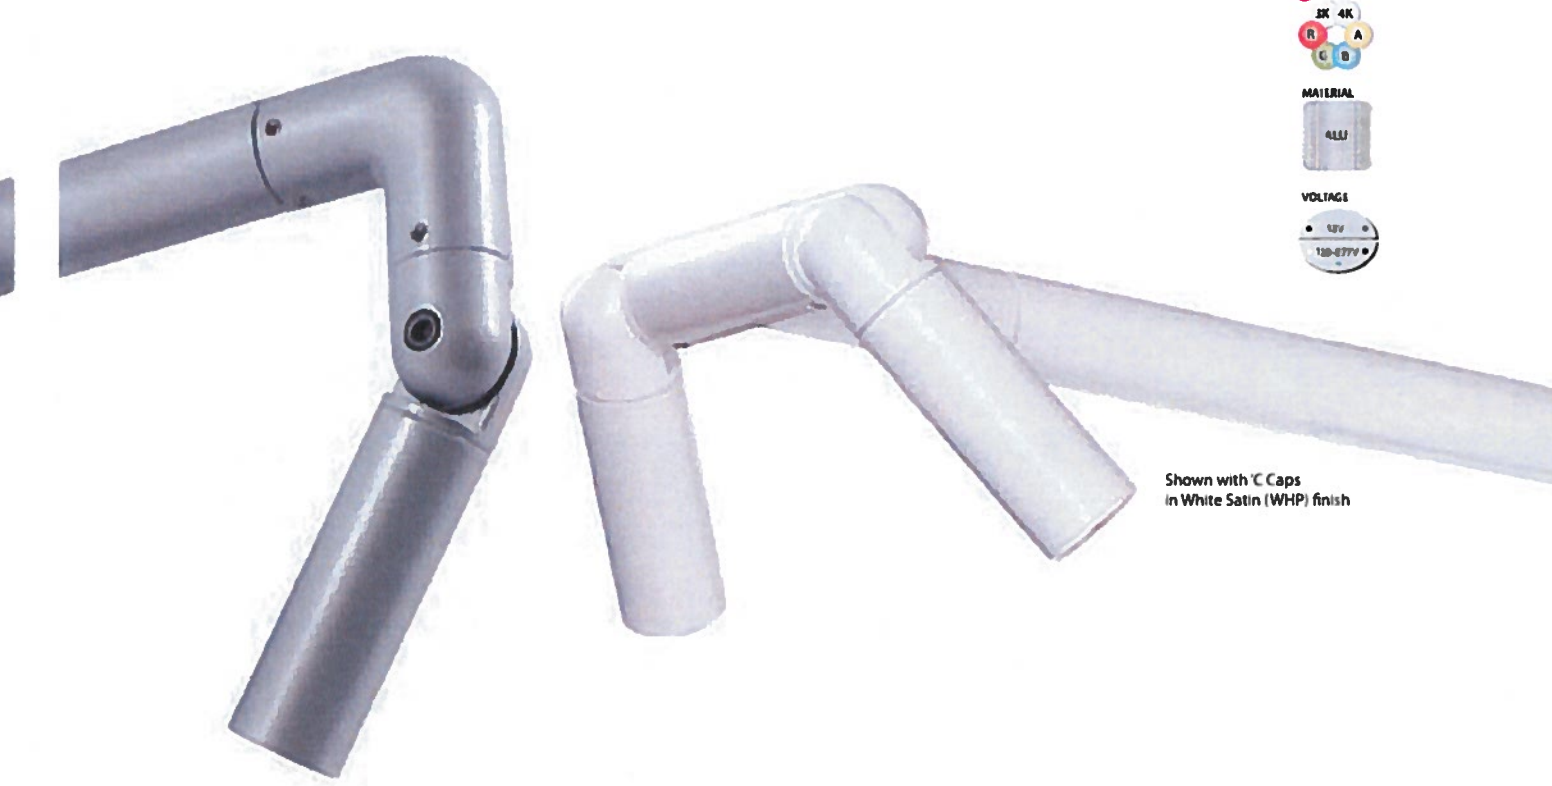

Shown with 'C' Caps in White Satin (WHP) finish

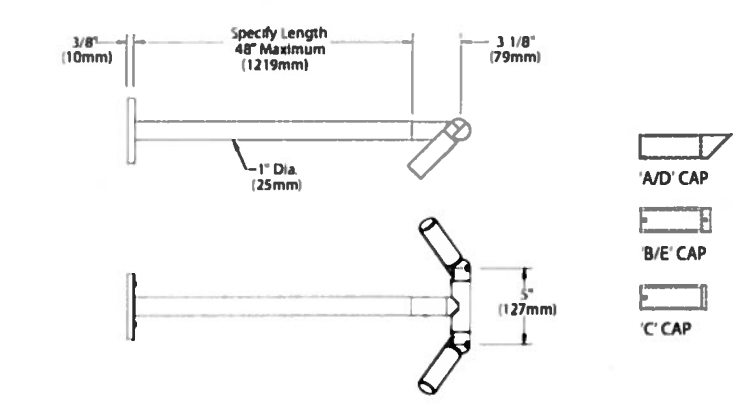



BKSSL — the power of e

MINI-MICRO™ SIGN LIGHT with Power Canopy

PROJECT:	NANDO'S KING ST.
TYPE:	SIGN LIGHT
CATALOG NUMBER:	SN-36-L-MH-LED-e38-FL-BLP-12-11-A-PCL10M-120
SOURCE:	
NOTES:	

CATALOG NUMBER LOGIC

	SN	36	L	MM	LED	e38	FL	BLP	12	11	A	PCL10M-120
Example:	SN	18	L	MM	LED	e10	SP	BZP	12	11	A	PC-L10M-120

Series
SN - Sign Star™

Stem Length
(Specify in inches) 18", 24", 30", or 36"

Style
L - 90° Radius

Fixture
MM - Mini-Micro™ Floodlight

Source
LED - 'e' Technology with Integral Driver

LED Type
e38 - 3WLED/2.7K; e10 - 3WLED/3K; e11 - 3WLED/4K; e12 - 3WLED/Red; e13 - 3WLED/Green; e14 - 3WLED/Blue; e15 - 3WLED/Amber

Optics*
SP - Spot (Green Indicator)
FL - Flood (Blue Indicator)

Finish

Aluminum Finish

Powder Coat Color	Satin	Wrinkle
Bronze	BZP	BZW
Black	BLP	BLW
White (Gloss)	WHP	WHW
Aluminum	SAP	—
Verde	—	VER

Premium Finish

ABP	Antique Brass Powder	CMG	Cascade Mountain Granite	RMG	Rocky Mountain Granite
AMG	Aleutian Mountain Granite	CRI	Cracked Ice	SOS	Sonoran Desert Sandstone
AQW	Antique White	CRM	Cream	SMG	Sierra Mountain Granite
BCM	Black Chrome	HUG	Hunter Green	TXF	Textured Forest
BGE	Beige	MDS	Mojave Desert Sandstone	WCP	Weathered Copper
BPP	Brown Patina Powder	NBP	Natural Brass Powder	WIR	Weathered Iron
CAP	Clear Anodized Powder	OCP	Old Copper		Also available in RAL Finishes. See submittal SUB 1439.00

Lens Type
12 - Soft Focus Lens; 13 - Rectilinear Lens

Shielding
11 - Honeycomb Baffle

Cap Style
A - 45°; B - 90°; C - Flush; D - 45° without Weep Hole; E - 90° without Weep Hole

Transformer Style
PC-L10M-120 - Power Canopy with 10VA Magnetic 120V Transformer*
PC-L10M-230 - Power Canopy with 10VA Magnetic 230V Transformer*
PC-L10M-277 - Power Canopy with 10VA Magnetic 277V Transformer*
*Non Dimming

LM79 DATA

BK No.	CCT (Typ.)	Input Watts (Typ.)	CRI
e38	2700K	3.0	90
e10	3100K	3.0	90
e11	4100K	3.0	75
e12	Red (627nm)	2.8	~
e13	Green (530nm)	3.0	~
e14	Blue (470nm)	3.0	~
e15	Amber (590nm)	2.8	~

L70 DATA

Minimum Rated Life (hrs.) 70% of Initial lumens (L_{70})
50,000
50,000
50,000
50,000
50,000
50,000
50,000

*OPTICAL DATA

Beam Type	Angle	Visual Indicator
Spot	16°	Green Dot
Flood	33°	Blue Dot

B-K LIGHTING	40429 Brickyard Drive • Madera, CA 93636 • USA 559.438.5800 • FAX 559.438.5900 www.bklighting.com • info@bklighting.com	SUBMITTAL DATE 12-13-11	DRAWING NUMBER SUB000974.1

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF B-K LIGHTING, INC. AND ITS RECEIPT OR POSSESSION DOES NOT CONVEY ANY RIGHTS TO REPRODUCE, DISCLOSE ITS CONTENTS, OR TO MANUFACTURE, USE OR SELL ANYTHING IT MA...



BKSSL — the power of e

MINI-MICRO™ SIGN LIGHT with Power Canopy

PROJECT:	
TYPE:	

SIDE VIEW

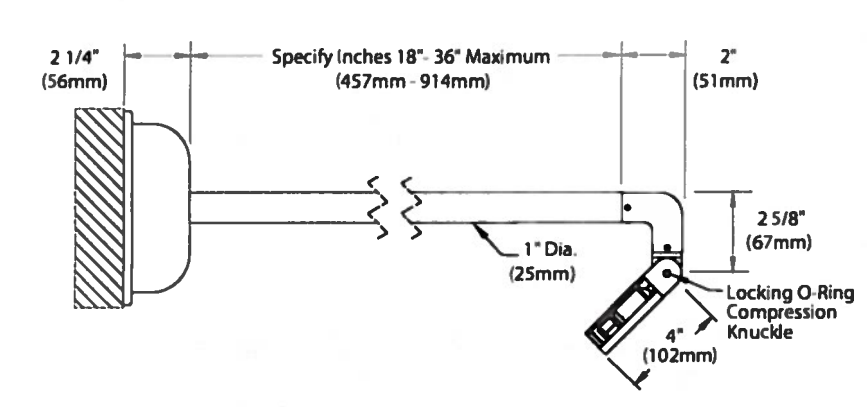



All dimensions indicated on this submittal are nominal. Contact Technical Sales if you require more stringent specifications.

SPECIFICATIONS

GreenSource Initiative™
Metal and packaging components are made from recycled materials. Manufactured using renewable solar energy, produced onsite. Returnable to manufacturer at end of life to ensure cradle-to-cradle handling. Packaging contains no chlorofluorocarbons (CFC's). Use of this product may qualify for GreenSource efficacy and recycling rebate(s). Consult www.bklighting.com/greensource for program requirements.

Materials
Furnished in Copper-Free Aluminum (Type 6061-T6).

Style
'L' Style provides clean, 90° transition from fixture to stem.

Body
Fully machined from solid billet. Unibody design provides enclosed, water-proof wireway and integral heat sink for maximum component life. Integral knuckle for maximum mechanical strength. High temperature, silicone 'O' Ring provides water-tight seal.

Knuckle
The LOCK™ (Locking 'O' Ring Compression Knuckle) is comprised of two components. The first is integral to the body and features an interior, machined taper. The second is machined from solid billet and features a second, reverse angle taper. The resultant mechanical taper-lock allows a full 180° vertical adjustment without the use of serrated teeth, which inherently limit aiming. High temperature, silicone 'O' Ring provides water-tight seal and compressive resistance to maintain fixture position. Design withstands 73 lb. static load prior to movement to ensure decades of optical alignment. Biaxial source control with 360° horizontal rotation in addition to vertical adjustment.

Cap
Fully machined. Accommodates (1) lens or louver media. Choose from 45° cutoff ('A' or 'D'), 3/8" deep bezel with 90° cutoff ('B' or 'E'), or flush lens ('C') cap styles. 'A' and 'B' caps include weep-hole for water and debris drainage. 'D' and 'E' caps exclude weep-hole and are for interior use only.

Stem
Fully machined, 1" dia. with internal threads for maximum visual appeal. Available in configurable lengths to 36" maximum overall.

Lens
Shock resistant, tempered, glass lens is factory adhered to fixture cap and provides hermetically sealed optical compartment. Specify soft focus (#12) or rectilinear (#13) lens.

BKSSL™
Integrated solid state system with 'e' technology. High power, forward throw source complies with ANSI C78.377 binning requirements. Exceeds ENERGY STAR® lumen maintenance requirements. LM-80 certified components.

Integral non-dimming driver. Minimum 50,000 hour rated life at 70% of initial lumens (L70). BKSSL technology provides long life, significant energy reduction and exceptional thermal management.

Optics
OPTIKIT™ modules are color-coded for easy reference: Spot (SP) = Green. Flood (FL) = Blue.

Installation
6-1/2" dia. Power Canopy™ features gasketed mounting plate for surface or junction box installation with two ½" KO's for wiring (hardware by others). Junction box installation must be designed to hold full fulcrum weight of fixture.

Transformer
Integral, low voltage, magnetic transformer. Non-dimmable. 120V, 230V, and 277V primary voltage. 50/60Hz. 12VAC secondary voltage. 10VA maximum load.

Wiring
Teflon® coated, 18AWG, 600V, 250° C rated and certified to UL 1659 standard.

Hardware
Tamper-resistant, stainless steel hardware. LOCK™ aiming screw and canopy mounting screws are additionally black oxide treated for additional corrosion resistance.

Finish
StarGuard® (Pat. Pend.), a RoHs compliant, 15 stage chromate-free process cleans and conversion coats aluminum components prior to application of Class 'A' TGIC polyester powder coating.

Warranty
5 year limited warranty.

Certification and Listing
ITL tested to IESNA LM-79. Lighting Facts Registration per USDOE (www.lightingfacts.com). ETL Listed to ANSI/UL Standard 1838 and UL Subject 8750 and Certified to CAN/CSA Standard C22.2 No. 9. RoHs compliant. Suitable for indoor or outdoor use. Suitable for use in wet locations. IP 66 Rated. Made in USA.

RoHS · lighting facts

*Teflon is a registered trademark of DuPont Corporation.
*Energy Star is a registered trademark of the United States

B-K LIGHTING	40429 Brickyard Drive • Madera, CA 93636 • USA 559.438.5800 • FAX 559.438.5900 www.bklighting.com • info@bklighting.com	SUBMITTAL DATE 12-13-11	DRAWING NUMBER SUB000974.1

HSK-8

Nando's Peri Peri

Nando's Alexandria
Lighting Cut sheets

Project Number 11020.00
Printed 2/21/12

© HapstakDemetriou+, pllc

HapstakDemetriou+
3247 Q Street, NW
Suite 200
Washington, DC 20007
202.333.9038 P
202.333.6888 F
www.hd-ad.com
info@hd-ad.com
ARCHITECTURE | DESIGN