



**Docket Item #5A-D
 Master Plan Amendment #2011-0007
 Rezoning #2011-0001
 Development Special Use Permit #2011-0015
 Special Use Permit/Transportation Management Plan #2011-0060**

| <u>Application</u> | <u>General Data</u> | |
|--|-------------------------------|--|
| <u>Project Name:</u> Safeway on King Street | PC Hearing: | November 1, 2011 December 6, 2011 |
| | CC Hearing: | November 12, 2011 December 17, 2011 |
| | If approved, DSUP Expiration: | December 17, 2014 (three years) |
| <u>Location:</u> 3526 King Street | Zone: | Existing: CG/Commercial General Proposed: OC/Office Commercial with proffer |
| | Proposed Use: | Retail |
| <u>Applicant:</u> Safeway, Inc., represented by Duncan Blair | Small Area Plan: | Fairlington/Bradlee |
| | Historic District: | Not Applicable |
| | Green Building: | LEED Silver Certification for New Construction |

Purpose of Application

A consideration for requests to implement the following:

1. Master Plan Amendment to change the land use designation in the small area plan from CG to OC with proffer;
2. Rezoning from CG, Commercial General, to OC, Office Commercial with proffer, in order to increase the permitted Floor Area Ratio (FAR) from 0.5 to 1. The rezoning includes a proffer limiting the development to a grocery store and retail uses, and to this development plan;
3. Development Special Use Permit with Site Plan to construct an approximately 61,323 sq. ft. grocery store and an approximately 3,136 sq. ft. detached retail building;
4. Special Use Permit for retail use larger than 20,000 sq. ft.;
5. Special Use Permit for a Transportation Management Plan;
6. Special Use Permit for a parking reduction of 110 spaces; and
7. Modification to the Landscape Guidelines.

Staff Recommendation: APPROVAL WITH CONDITIONS

Staff Reviewer(s):

Patricia Escher, AICP; patricia.escher@alexandriava.gov, Colleen Willger, AICP, LEED AP BD+C; colleen.willger@alexandriava.gov Garry Meus; garry.meus@alexandriava.gov

PLANNING COMMISSION ACTION, NOVEMBER 1, 2011: On a motion made by Commissioner Wagner, seconded by Commissioner Robinson, the Planning Commission voted to defer the all of the applications to the December 6, 2011 hearing date. The Planning Commission requested staff and the applicant to further investigate reducing the number of curb

cuts and relocating the truck loading area, as well as to conduct additional community outreach. The Planning Commission noted that the public comment period was closed; however, they will reopen it in December for Mr. Brown, President of North Ridge Citizens' Association and Ms. Jordan, President of Fairlington Civic Association. The motion carried on a vote of 6-0; Chairman Komoroske was absent.

Speakers:

Duncan Blair, representing the applicant.

Rosiland Jordan, 4907 South 30th Street, #A2, Arlington, VA, President of Fairlington Civic Association (FCA), stated that FCA neither supports nor opposes the application. Ms. Jordan stated that there are concerns about the amount of community outreach conducted and the neighborhood has long running concerns about traffic at the King Street, Quaker Lane, and Braddock Road intersection.

Bill and Molly Pugh, 1200 Quaker Lane, spoke about their concerns regarding the pedestrian environment. They would like Braddock Road to have additional pedestrian improvements, incorporating wider sidewalks and plantings strips and believe the application is inconsistent with the Transportation Master Plan.

Nancy Jennings, 2115 Marlboro Drive, President of Seminary Hills Civic Association, stated concerns about the architecture fitting with the neighborhood and the location of the store on historic land. Ms. Jennings also stated concerns about the traffic at the King Street, Quaker Lane, and Braddock Road intersection. She also commented about not understanding why the truck traffic and loading need to be on Braddock Road.


Jack Sullivan, 4300 Ivanhoe Place, stated that underground parking is a City policy that is not being upheld with this application. Mr. Sullivan also believes that the proposal is inconsistent with the Small Area Plan. Mr. Sullivan requested that the proposal be denied.

Joanne Lepanto, 4009 North Garland Street, stated her main concerns included parking, traffic, the mass and scale of the building, and the financial feasibility of the proposal. Ms. Lepanto requested that the proposal be denied.


Cathy Puskar, 2200 Clarendon Boulevard, Suite 1300, Arlington, VA, representing WRIT, spoke in support of the revisions to condition #3c.

Virginia Chon, 200 Yoakum Parkway, Apt. 714, representing the King Drycleaners, stated her concerns that neighboring business owners were unaware of the proposal.

MPA#2011-0007, REZ#2011-0001
DSUP#2011-0015, TMP SUP#2011-0060
Safeway, Inc., 3526 King Street

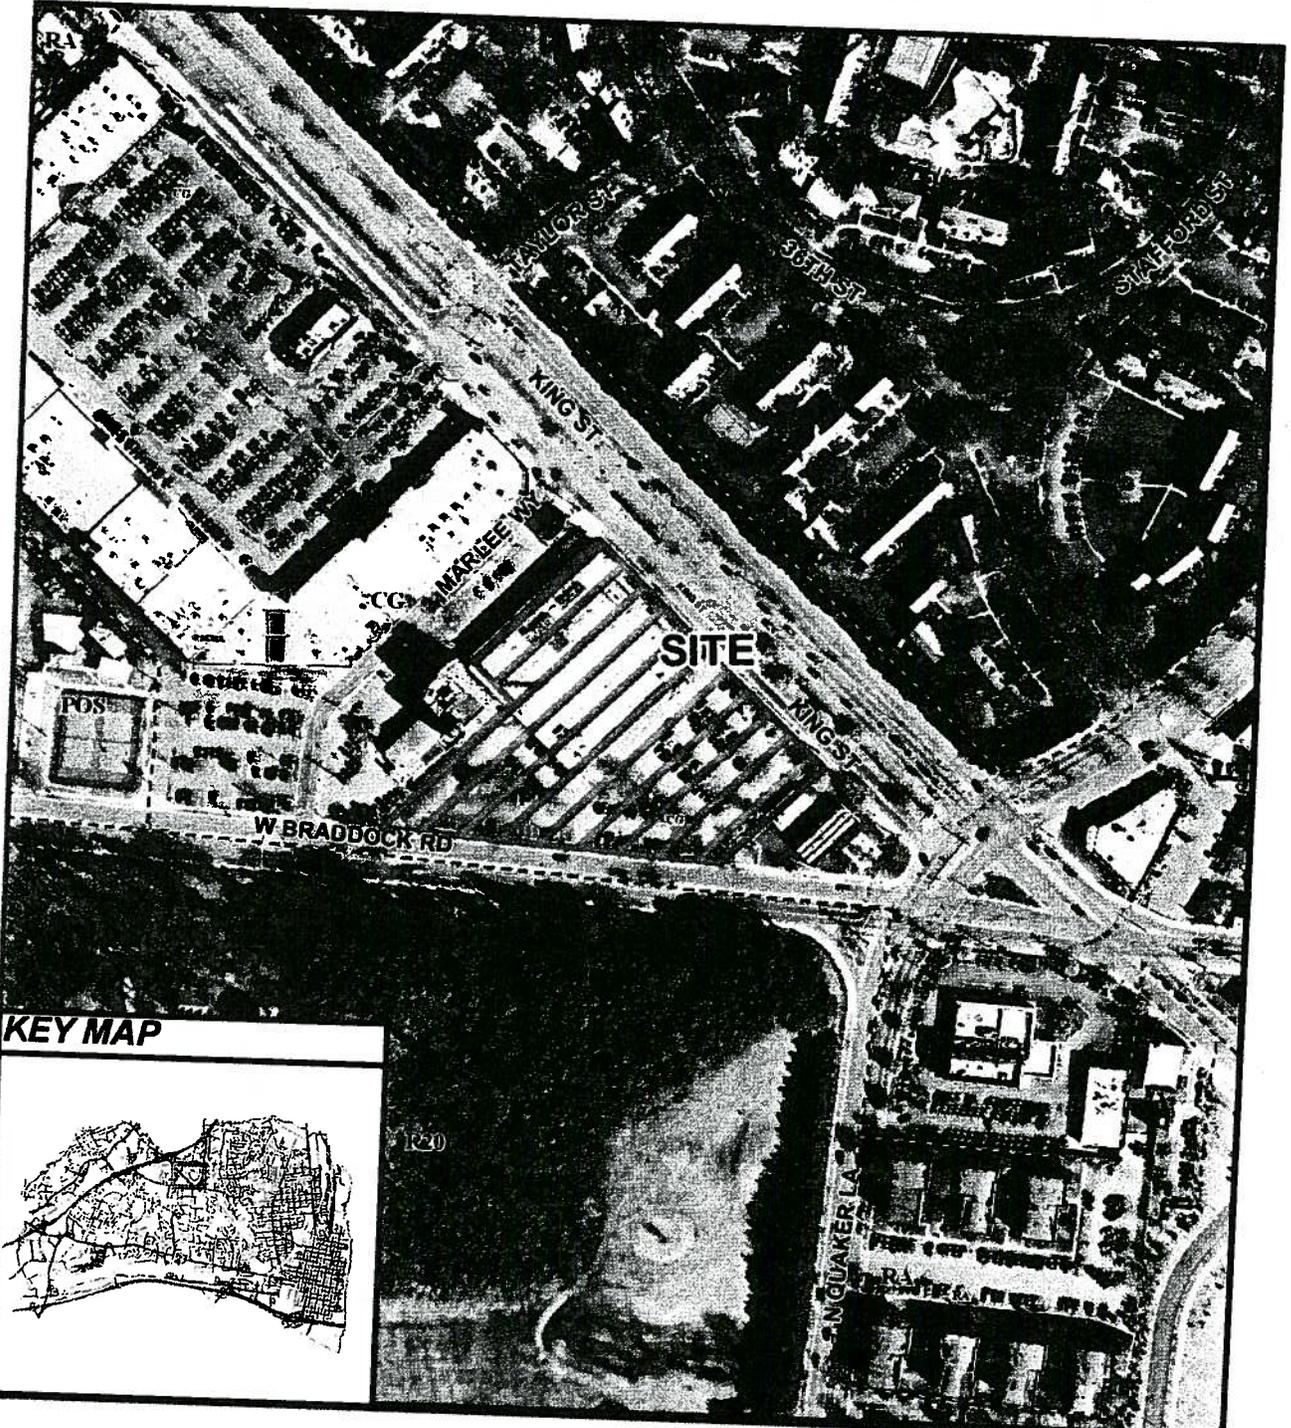

KEY MAP



MPA#2011-0007
REZ#2011-0002
DSUP#2011-0015
SUP TMP#2011-0060

11/1/2011



I. SUMMARY

A. *Recommendation*

Staff recommends approval of the applications that would amend the Fairlington/Bradlee Small Area Plan and rezone the property from Commercial General (CG) to Office/Commercial (OC) Zone District with a proffer to grocery store use and to the proposed development plan. Staff also recommends approval of the applications that allow the construction of a grocery store, ancillary retail building, and associated parking at 3526 King Street, subject to compliance with staff recommendations. The proposal provides a number of benefits to the community, including the following:

- Modernizing an existing grocery store that serves the surrounding neighborhood;
- Enhancing the streetscape and pedestrian environment along King Street and Braddock Road;
- Providing an attractive architectural design; and
- Constructing an environmentally sustainable building design and site planning.

B. *Summary of Issues*

The applicant and developer, Safeway, Inc., has submitted a request to redevelop two parcels adjacent to the Bradlee Shopping Center near the intersection of Quaker Lane, Braddock Road and King Street. The applicant seeks to improve an existing, older grocery store and provide shopping amenities that are commensurate with what today's consumers look for in a grocery store. To do these improvements, the applicant wishes to expand the footprint of the existing grocery store and to place the majority of the parking for the customers in an at-grade structure with the retail grocery store above, on the upper floor. This model has been successfully implemented in new Safeway stores located in Georgetown and Bethesda. The site currently houses an existing Safeway store with a square footage of 41,693± sq. ft. The proposed redevelopment of the site would add 19,630± sq. ft. to the store's floor plate. The additional square footage requested is to allow for Safeway's new "lifestyle" model with a total gross square footage of approximately 61,000 sq. ft. for the grocery and approximately 3,100 sq. ft. for a detached, ancillary, retail building.

The proposed new store building is larger than the existing store. It includes parking within the structure in order to minimize surface parking. The building as proposed exceeds the FAR limits in the CG zone (0.5 FAR). Thus, the applicant is requesting a rezoning to Office Commercial (OC) that allows up to 1 FAR. This rezoning is proffered to the existing grocery store use and the specific development plan included in the DSUP.

The proposal provides 228 parking spaces which are 29 more spaces than currently existing, but will require a parking reduction from the number required by the City's Zoning Ordinance.

To construct the project, the applicant has requested the following:

- Master Plan Amendment;
- Proffered rezoning of the property;
- Development Special User Permit with Site Plan

- Special Use Permit for a retail use larger than 20,000 sq. ft.;
- Special Use Permit for a Transportation Management Plan;
- Special Use Permit for a parking reduction; and
- Modification to the Landscape Guidelines.

Key issues that were considered with this proposal, which are discussed in more detail later in the report include the following:

- Proffered rezoning;
- Parking, including the proposed at-grade, semi-wrapped parking and the requested parking reduction;
- The request for a big box retail store;
- Architecture and building design;
- Analysis of potential traffic impacts;
- Environmental benefits; and
- Design and function of open space.

II. BACKGROUND

Site Context

The site is located in the Fairlington/Bradlee area of the city and comprised of two lots of record that will be consolidated with this proposal. The project area is approximately three (3) acres or 130,533 sq. ft. and is bounded by King Street to the north, a Sunoco gas station to the east, Braddock Road to the south, and the Bradlee Medical Office Building to the west. Residential, office, and retail uses surround the site.

III. PROJECT DESCRIPTION

Safeway, Inc. has been at this location for many decades serving the surrounding community. Over the life of the building, which was constructed in 1982, there have been several remodels to the store. Currently, the store faces onto a large, surface parking lot. The façade of the store does not face any street – rather, the King Street frontage of the site is dominated by the loading docks for deliveries to the store. The overall effect is not in keeping with good urban design principles, but is not atypical of the more suburban-style character of surrounding area.

The current proposal re-orientes the front of the store to King Street and creates a more cohesive streetwall along King Street with active ground floor uses and a pedestrian-oriented plaza/open space. The Braddock Road frontage is still used primarily for access, but includes enhanced landscaping and a green buffer that relates to the open space of Episcopal High School across the street. Bioretention areas, or rain gardens, are proposed along the perimeter of the site, predominantly along the Braddock Road frontage, screening the surface parking and sustainably treating the stormwater runoff. The grocery store building itself is completely revamped to provide high quality architecture and a new type of shopping experience.

The grocery business has been evolving over the recent past with a number of new companies in the region competing for customers. Safeway has responded to this competition by updating a number of their current stores into "lifestyle" center models, and this model is what is currently proposed for this particular store. These "lifestyle" stores are still basic grocery stores; however, they include an enhanced deli with prepared food, a bakery which bakes specialty breads on-site, a drycleaners, a pharmacy, and a café with seating. In this particular application, outdoor café seating is proposed on a balcony that overlooks a pedestrian plaza and a bosque of trees. Additionally, multiple internal designs will be incorporated to update the store into the "lifestyle" center model. Store aisles will be wider and shelves will be lower for improved ease of shopping. Parking spaces and drive aisles are designed with more room to allow for shopping carts to easily pass between cars. The grocery store – which is above a level of at-grade parking structure - is accessed via escalators and elevators from ground floor lobbies into a second story lobby area. There is also a potential "cartalator" for patrons to use to transport the shopping carts to and from the second store grocery to the at-grade parking area.

As part of the goal of creating an active streetscape along King Street, the proposal includes the construction of a new, small, ancillary, retail building located between the proposed Safeway store and the Sunoco gas station. Parking for both buildings is provided at-grade with the majority of the parking spaces located directly underneath the grocery store. Anticipated retail uses for the small, retail building are intended to be complimentary to the grocery store. A pedestrian plaza is proposed between the main entrance to the grocery store and the small retail building. Additionally, the store itself has two lobby areas that front onto King Street and provide access from the parking areas and from the sidewalk to the store space above. Between these two lobby areas is a glassy amenity space that fronts on King Street and will provide not only space for special Safeway promotions and seasonal sale items, but also a community meeting room that will be available at no charge to community groups.

The new store and parking format will result in a building that is larger than permitted in the CG zone, which was designed for lower FARs and suburban-style land parcels. The overall height of the project meets the height limits of the CG zone, but the bulk and mass will be larger. The proposed high quality architecture helps to mitigate the bulk, but the property still does not meet CG FAR limits. Thus, the applicant has proposed a proffered rezoning to the OC zone – which allows for a 1.0 FAR. The proffers would tie the project to this specific development proposal and the grocery store use.

IV. MASTER PLAN AND ZONING

The project site has been zoned for commercial development since its annexation into the City from Arlington County in 1952. Prior to the 1992 updates to the City's Master Plan and Zoning Ordinance, the site was classified as C-2, a commercial zone. The C-2 Zone District allowed for a 3.0 Floor Area Ratio (FAR) for commercial development. The 1992 updates to the City's governing planning documents reduced the amount of density permitted throughout the city. The project site remained a commercially zoned property, but its overall allowable FAR was reduced to 0.5.

The resulting land use designation and proposed zoning in the Fairlington/Bradlee Small Area Plan for the site, which still exists today, is CG/Commercial General. The zoning map reflects this 1992 change. The CG zone was created with the intention "to provide for retail and service uses, including automobile-oriented businesses, in community serving shopping centers along major roads. Although office uses are permitted, the zone is not intended as an area for office centers" (Section 4-400). The CG zoning classification is used throughout the city, mostly along major road corridors. For more detailed zoning information see Table #1 below.

Table 1. Zoning Tabulations

| | Permitted/Required Zone | CG | Proposed Requirements - OC Zone | Zone | Provided with Site Plan Proposal |
|-----------------|---|----|---|------|---|
| FAR: | 0.5 | | 1.0 | | 0.97 |
| Height: | 50 feet | | 50 feet | | 46 feet |
| Yard Setbacks: | Nonresidential: none | | Nonresidential: none | | None |
| Open Space: | Nonresidential: none | | Nonresidential: none | | 17,405 sq. ft. (0.4 acres) |
| Parking: | 1.2 spaces per 230 sq. ft. for grocery store and 1.2 spaces per 210 sq. ft. for retail bldg. (338 parking spaces) | | 1.2 spaces per 230 sq. ft. for grocery store and 1.2 spaces per 210 sq. ft. for retail bldg. (338 parking spaces) | | 228 parking spaces (110 parking space reduction)* |
| Loading spaces: | 1 space per 20,000 sq. ft. (3 loading spaces) | | 1 space per 20,000 sq. ft. (3 loading spaces) | | 3 loading spaces |

* A special use permit is requested for a parking reduction.

V. STAFF ANALYSIS

A. Master Plan Amendment and Proffered Rezoning Request

The Fairlington/Bradlee area is at the crossroads of several arterial roads (King Street, Braddock Road and Quaker Lane) that create a historically awkward intersection and lead to major highways such as I-395. The area is characterized by a number of major institutional uses such as T. C Williams High School, Minnie Howard School, Episcopal High School, the Virginia Theological Seminary, and a number of nearby large churches. The commercial and institutional uses along the arterial corridors are surrounded by several traditional residential neighborhoods. The result is a series of large, awkwardly shaped commercial land parcels with community retail uses including Safeway, Bradlee Center, gas stations, and car dealerships.

The 1992 small area plan emphasized community retail uses along the commercial corridors, as long as these uses remain compatible with the surrounding residential neighborhoods. Specifically, the land use designation and zoning in the 1992 plan called for the highest level of retail zone in the Zoning Ordinance. The retail parcels in this small area serve a significant portion of the population of the city. The goal of retaining and supporting community retail that is compatible with the residential neighborhoods and the residential character of nearby institutions is as valid today as it was in 1992.

The current proposal for a proffered rezoning is consistent with the goals outlined in the Fairlington/Bradlee Small Area Plan, even though the FAR would increase from 0.5 to 1.0. The rezoning request would change the zoning of the site from Commercial General (CG) zone to Office Commercial (OC) zone; however, the zoning would be proffered to the grocery store use as well as to this specific development proposal. Office uses would not be allowed and the primary use of the site would remain as a retail grocery store. Additionally, staff believes the proffer gives the City and community assurances that the only development allowed up to a 1.0 FAR on this site is the currently proposed project, without setting precedents for future density increases.

The applicant is requesting an amendment to the Fairlington/Bradlee Small Area Plan chapter of the City's Master Plan in order to change the land use classification from the Commercial General (CG) zone to the Office Commercial (OC) zone, and to amend the maps in the small area plan to show this change.

Consistency with Master Plan

The Fairlington/Bradlee Small Area Plan was adopted in 1992 and has five goals for the area, all of which are achieved in conjunction with this development proposal:

- Protecting the established single-family homes in the area
- Preserving neighborhood-serving retail
- Assuring that new commercial development is compatible
- Improving traffic circulation; and
- Improving the visual appearance of the area.

Goal 1: To preserve and maintain neighborhoods adjacent to the plan area and protect those areas from density increase and congestion from development and redevelopment of land within the plan area.

The application preserves and maintains the adjacent neighborhoods by proposing a building that is massed and scaled appropriately for the area. The site planning provides a strong building streetwall along the King Street frontage and a green buffer along the pastoral, more landscaped setting of Braddock Road. By siting the building on King Street, a streetwall with active ground floor uses is created and the sidewalk abuts the building. Alternatively on the Braddock Road frontage, the building is set back from the road and natural, green, open spaces are placed along the sidewalk to share a dialog with the vegetated areas across the street at Episcopal High School. The new store will maintain the existing customer base and will attract some new

customers, resulting in some increase to traffic. The applicant therefore has agreed to participate in a transportation management plan and provide a monetary contribution to the City for street/intersection improvements that will help mitigate traffic concerns potentially created by the development.

Goal 2: To preserve and maintain the continued presence of neighborhood-serving retail currently existing in the area.

The site has been designated as a retail site throughout its incorporation with the City. The proposal would maintain and continue the community-serving grocery store use that currently provides services to the surrounding neighborhoods – in fact, through the proffer, no other use is permitted. In addition to the existing grocery store use, there will be other neighborhood-serving retail in the grocery store such as a café/coffee shop, drycleaners, and pharmacy. There will also be additional neighborhood-serving retail uses in the detached, ancillary retail building that is proposed. Although proposed for a new zone, the proffer keeps the land uses as retail and grocery store in order to ensure continued community serving uses.

Goal 3: To ensure that commercial redevelopment is compatible with surrounding neighborhoods and in scale with existing commercial areas.

The Safeway store is positioned on the site to be near the existing Bradlee Shopping Center and taller medical office buildings to the north. The small, ancillary retail building is sited next to the existing Sunoco gas station. While the design of the grocery store is taller than many of the existing one story commercial uses in the area, staff believes that both proposed buildings were sited and designed to be compatible with the scale of the existing buildings on the adjacent properties. The 46 foot height meets the CG zoning standard of 50 feet maximum and the mass of the building is addressed through the use of architectural features and setbacks. While the proposal is expanding the grocery store's floor plate, the use is essentially the same: community-serving retail.

Goal 4: To improve traffic circulation within the area, consistent with the attainment of other goals and objectives.

The existing grocery store is a destination and it generates traffic. It is true that a new, larger grocery store will generate incrementally more traffic; however, not necessarily in a direct relationship with the amount of new square footage. The store's goal is certainly to attract new customers, but even more so to avoid loss of existing customers to competitors and encourage existing customers to buy more. The overall traffic circulation in the area is already quite difficult. This proposed development will add trips to the network, but will also offer improvements including: a more orderly loading dock situation, improvements to nearby intersections with pedestrian countdown apparatus, a monetary contribution towards intersection improvements at the King Street, Braddock Road, and Quaker Lane intersection, and a TMP. The bus stop on the King Street service drive will be improved and bicycle storage will be provided on site. Pedestrian circulation will be enhanced with the installation of new sidewalks

and streetscape, as well as a designated path from Braddock Road to the entrances of both proposed buildings.

Goal 5: To improve the visual appearance of the area, consistent with sound principles of urban design.

The existing site layout is a dated design, with a large, non-screened, surface parking lot directly adjacent to both King Street and Braddock Road. The loading space is located in a highly prominent location along the King Street frontage. The building design is nondescript and set back from the street with no direction relationship to either street. The proposal will improve the visual appearance of the area by providing a contemporary, sustainable building design, an urban plaza, and open space on the site. Urban design principles such as siting the buildings to front on the street, locating parking behind the buildings, screening parking with active uses, and providing multi-modal transit opportunities, are all employed with this application.

Additionally, the proposal is consistent with other City adopted goals and policies such as:

- Locating development along well-served mass transit routes;
- Providing a transportation management plan (TMP);
- Contributing to the Affordable Housing Trust Fund; and
- Constructing buildings that comply with the City's Green Building Policy by striving to achieve USGBC's LEED Silver Certification.

Rezoning Criteria

The City Council adopted a policy to help guide staff and applicants when considering a rezoning request. These criteria are used when considering if an application can proceed without a master plan study for the area.

The five criteria include the following:

1. *Consistency with Small Area Plan*

The application is consistent with the intent and goals of the Fairlington/Bradlee Small Area Plan as it is maintaining and improving an existing community-serving retail use which is characteristic of the area. Additional analysis is included in the small area plan discussion above.

2. *Consistency with Type of Area*

The Fairlington/Bradlee area is typified by large, commercial buildings on major corridors and surrounded by stable residential neighborhoods. This project is a rebuilding of an existing large commercial building. The proposed project strengthens the streetwall along and orientation to King Street, which is the primary commercial corridor. It also enhances the softer green edge along Braddock Road by including plantings and green buffer along this frontage.

3. *Isolated Parcel*

The parcels are an isolated redevelopment opportunity with sole ownership of Safeway, Inc. and there are no known development proposals submitted to the City for redevelopment of other properties in the general vicinity. The applicant has approached adjacent properties to discuss consolidation, but they have not been interested.

4. *Status of Planning for Area*

The Fairlington/Bradlee Small Area Plan remains the governing document for the area with no future planning studies in this area slated to begin within the next fiscal year.

5. *Application's Consistency with City Goals*

In addition to being consistent with the vision in the small area plan, this proposal meets other City goals such as the Affordable Housing Policy, the Green Building Policy, and Economic Sustainability.

FAR Increase for Structured Parking

The increase in zoning FAR is the result of a building design which includes the parking within the structure. Specifically, the floor area for the new store would meet the CG FAR of 0.5 if the parking were replaced outside the building. However, consistent with improved urban design, the land outside the building is better used for landscaping, environmental biofiltration areas, a public plaza/open space, a detached retail building that strengthens the streetwall, and a small area of surface parking. The zoning solution here is to change the zone to one that allows larger buildings so the parking mass can be accommodated within the structure, and to accept the proffer that limits the uses to retail, similar to the existing zoning, as well as the superior site and building design included in the proposed plan.

An obvious theoretical alternative would be to construct underground parking, in which case the proposal would comply with the existing zoning. There are several reasons that staff has not insisted on underground parking. First, staff did, in strong discussions, ask the applicant to seriously consider it. In response, the applicant has been convincing in explaining that it would not proceed with rebuilding the grocery store and expanding its offerings because it was not economically feasible to do it with underground parking. Second, staff is convinced that the more suburban character of this portion of King Street merits a treatment that is somewhat different from more urban parts of the City. Land values and development pro formas in these areas make it more difficult to support underground parking. This is not to say that urban design along this portion of the King Street corridor is not important – staff has worked closely with the applicant to create a project that will enhance the streetwall with active uses, improve the pedestrian environments and create public open space. Finally, the other “lifestyle” Safeway models in both Georgetown and Bethesda are very urban concepts, yet both include surface and partially structured parking. Neither store includes underground parking, again, supporting Safeway’s economic argument.

While underground parking is theoretically desirable throughout Alexandria, the reality is that the City needs to prioritize its insistence on this expensive commodity. In this case, given the

limitations of the proffer, the good site and building design and the benefit of a modern, community-serving new grocery store, staff believes requiring underground parking is not necessary. On balance, staff supports the parking arrangement in this case even though it requires an increase in FAR, because of the benefits gained from a modern store in a well-designed building with strong urban design improvements for this location. The increase in FAR is ameliorated by the design elements of the plan; the proffer protects the future use and design of the site. For these reasons, staff supports both the master plan amendment and the proffered rezoning.

B. Request for a Retail Use Larger than 20,000 sq. ft.

The proposal includes a special use permit request for a retail use larger than 20,000 sq. ft. In 2002, the City adopted a text amendment to the Zoning Ordinance that requires big box retail uses to acquire special use permit approval. In this case, the Safeway store is approximately 61,000 sq. ft. and would be considered a big box retailer. The text amendment (TA#2002-0006) offers guidelines for staff to consider when reviewing SUP requests for large retail establishments. These guidelines are designed to ensure that large footprint stores are designed to be compatible with their urban surroundings in Alexandria, and include the following:

Guideline 1: Efficient and best use of land

The land is being used efficiently by redeveloping an existing, outdated, large-format retailer with a more current model to meet the neighborhood's present-day demands. The proposed project will bring the big box use into closer conformance with good urban design principles, such as creating a streetwall that is fronted with active uses, eliminating surface parking, and providing high quality architecture.

Guideline 2: Traffic and access

The proposal will increase traffic to a degree, but the applicant will provide monetary contributions to the City for some street improvements and participate in a TMP to help mitigate any potential impacts.

Guideline 3: Parking

This project proposes a parking configuration that is somewhat unique for a big box retailer. The majority of the parking spaces are contained under the building footprint and there is significantly less surface parking. The at-grade parking is partially lined with active uses and very attractive lobbies along King Street and the ceiling height for the at-grade parking is high – with the intention of creating a pleasant, airy, open space. The applicant is requesting a parking reduction, which is atypical of a big box retailer. Although the parking requirements in the zoning ordinance are not being met, there are 29 more spaces than currently provided for the existing grocery store. Staff has reviewed parking data submitted to the City and is comfortable that adequate parking is being provided with this proposal.

Guideline 4: Pedestrian access and circulation

The pedestrian access and circulation of the site will improve with the proposal of new streetscape enhancements along King Street and Braddock Road, as well as designated

pedestrian paths to the store entrance from the street, which pass through a landscaped pedestrian plaza/open space.

Guideline 5: Neighborhood compatibility

The site planning and building design are compatible with the existing neighborhood and commercial development in the area. The siting of the building along King Street creates a retail storefront presence along a major roadway corridor. The retail use is also similar to the uses adjacent to this major intersection and at the nearby Bradlee Shopping Center. While the grocery is taller than some of the one-story retail uses in the area, staff believes that the massing, height, and scale of the buildings are compatible with the area and notes that the proposed height is allowed under the current zoning. The use of open space along Braddock Road complements the green space across the street at Episcopal High School.

Guideline 6: Consistency with adopted plans

Finally, the proposal is consistent with adopted plans as the subject site has been designated as a commercial development since the City annexed the land in 1952, and for all the reasons noted in the discussion of the small area plan above.

C. Transportation Management Plan

The applicant will participate in a Transportation Management Plan (TMP) to encourage modes of transportation other than the typical single occupancy vehicle (SOV). In order to support such a plan, the applicant has agreed to contribute \$0.25 per square foot of retail space towards the TMP fund, with annual increases based on the U.S. Consumer Price Index. The SOV trip reduction goal for the site is 35 percent of employee trips. The TMP will require a coordinator to implement and oversee the program. Program highlights include transit information dissemination, an on-site rideshare program, and media fare distribution. Specifics of the TMP for this project are outlined in Attachment #1.

The applicant has also agreed to participate in the updated Transportation Management Plan program when implemented. The revised program will include the elements outlined in the December 8, 2010 memo approved by City Council. Participation in the updated TMP program will require this development to cooperate with other nearby TMPs, creating economies of scale and more effective use of TMP monetary resources.

D. Parking

At-Grade Structured Parking

This project proposes a parking configuration that is somewhat unique for a grocery store but which have been effectively implemented in two other area Safeways – the one on Wisconsin Avenue in Georgetown and the one on Bradley Boulevard in Bethesda. In these cases and in the current proposal, the majority of the parking spaces are contained under the building footprint and there is significantly less surface parking. In this proposed project, the at-grade parking is partially lined with active uses and very attractive lobbies along King Street and the ceiling

height for the at-grade parking is high – with the intention of creating a pleasant, airy, open space. Staff supports this parking configuration for several reasons.

First, the proposed parking will improve the streetwall along King Street and will conform to good urban design planning principles. The immediate area is typified by surface parking lots, which are frequently located in front of the retail buildings. Unlike other parts of the City, this area has a limited sense of streetwalls and good relationships between buildings and sidewalks. Collectively, this makes for an environment that does not encourage pedestrian activity. The current proposal greatly improves upon this situation. All parking is located behind both proposed buildings fronting on King Street and is screened from Braddock Road. Approximately 60% of the spaces are contained under the Safeway building. The frontage along King Street will accommodate active uses such as a community amenity room for neighborhood residents and store promotions/events, as well as the entrance lobbies with escalators and “catalators”. Additionally, there will be retail space in the detached, ancillary retail building that reinforces the King Street streetwall. The limited amount of proposed surface parking will be setback from the street on the Braddock Road side, and entirely screened by either low, decorative walls, or natural vegetation installed in the rain gardens.

Secondly, the overall renovation of the existing Safeway store is a positive improvement for the community. The existing store is dated and the new store will provide many amenities for the community. In order to build the new store with the proposed enhancements, the footprint of the store must be expanded. If the footprint is expanded, providing all parking in a surface lot is impossible – the parking needs to either be underground, under a raised retail building (the current proposal), or on the roof. All of these options were explored at length with the applicant and the only one that was viable from an economic and logistical perspective in this less urban part of the City was placing the parking under the raised retail building.

Finally, staff has visited the two Safeway stores where this proposed parking configuration has been used. These stores have done an excellent job of creating streetwalls and better urban design in areas where there has been a more suburban grocery store site. The parking areas under the raised retail are well-designed, light and airy. Parking is functional and the entry into the grocery stores through well-designed lobbies is attractive and easy. Based on these site visits, staff is convinced that this proposed parking configuration is appropriate to the neighborhood character and will improve upon the current situation.

Parking Reduction

The applicant is requesting approval of a special use permit for a parking reduction. The Zoning Ordinance requires approximately 338 parking spaces and the applicant is proposing 228 parking stalls. The application request is for a reduction of 110 parking spaces. There are a total of 153 standard parking spaces, 67 compact spaces, and 8 accessible parking spaces. Approximately 43% of the parking is comprised of compact parking stalls, which complies with the City’s Zoning Ordinance. The spaces and drive aisles are designed to be slightly larger than the typical dimension in order to accommodate comfortable access between the parked cars with shopping carts.

Staff acknowledges that the technical reduction is large. Nevertheless, staff supports the parking reduction for several reasons. Firstly and most importantly, the submitted data for the existing Safeway store indicate that the lower number of spaces will sufficiently serve the demand. In the review of other grocery stores proposals, staff has determined that the Whole Foods store on Duke Street has a peak parking demand of 3.9 spaces per 1,000 sq. ft. and the recently approved Harris Teeter proposal in Old Town North has a ratio of 3.5 parking spaces per 1,000 sq ft. The Safeway proposal has a parking ratio of 3.6 parking spaces per 1,000 sq ft. well within this parking range. Secondly, the required amount of parking spaces would increase the amount of impervious area on the site, as well as reduce the amount of open space, which would be inconsistent with the City's goal of environmentally responsible development. Even while the request is for a parking reduction pursuant to the City's requirements, there will be a net gain of 29 new spaces over what currently exists today.

Finally, the overall proposal is intended to make the site more pedestrian-friendly and to encourage people to come to the store in ways other than by car. The applicant has agreed to participate in a TMP, to enhance an existing bus stop and provide on-site bicycle parking as a strategy to encourage alternative modes of transit.

E. Traffic Study

A traffic study was completed by the applicant to measure the impacts of the proposed development on the surrounding roadway network. Based on the applicant's traffic study, the development will generate 54 new AM peak hour trips, 161 new PM peak hour trips, and 166 weekend peak hour trips. The increase in trips is driven primarily by the increase in the size of the proposed grocery store when compared to the existing store, and to a lesser extent by the new 3,000 square foot specialty retail store that is proposed for the site. The site will be served by entrances on both Braddock Road and the King Street Service Road, and circulation patterns to and from the store will be similar to the existing circulation patterns.

Transportation staff has some concerns on the effect of the additional traffic generated by the site on the operation of the signalized intersection of King Street, Quaker Lane, and Braddock Road. Several approaches to this intersection operate at failing levels of service during both the morning and evening peak hours in existing conditions as well as in future conditions with development. Transportation staff has a mid-term goal to add a second left turn lane at several of the approaches to the intersection to add capacity and improve the overall level of service at this intersection. This project is in the preliminary stages and will require right-of-way acquisition before construction of the additional turn lanes is possible. In order to help mitigate the effects of the additional traffic generated by the proposed development, staff has included a condition requiring the applicant to contribute \$200,000 for the design of the additional turn lanes.

Finally, the applicant has agreed to provide \$181,500 to facilitate additional transit and safety improvements adjacent to the site. Through previous studies of the King Street corridor, staff has determined that converting the King Street Service Road from two-way operation at its terminus with Quaker Lane to one-way eastbound only operation will improve safety of the service road and improve the efficiency of traffic operations on southbound Quaker Lane. It is

anticipated a portion of this funding will be used to modify the King Street Service Road to one-way operation at Quaker Lane. This funding will also be used to relocate the existing WMATA bus stop on Braddock Road further to the west to make the stop more convenient for bus riders. A new bus shelter will also be installed at the relocated stop to provide bus riders a safe and comfortable waiting area.

Staff believes the monetary contribution for the design of additional roadway capacity at the intersection of King Street, Quaker Lane, and Braddock Road and the monetary contribution for transit and safety improvements adjacent to the site are appropriate mitigation measures to address the increase in traffic generated by the proposed development.

Truck Traffic

Some concerns have been expressed by citizens regarding truck traffic, with most concerns voiced about the impacts of truck traffic on Braddock Road. Currently, the Safeway loading dock is located on the King Street side of the grocery store. Since the new store's footprint moves the store closer to King Street to create a streetwall along the King Street Service Road, the old loading dock location is no longer appropriate or feasible. The loading dock has been moved to the Braddock Road side of the grocery store and placed at the rear of the store. This location has several benefits, including minimizing conflicts between delivery traffic and store patron traffic, as well as being located as far as possible from the intersection of King Street, Quaker Lane, and Braddock Lane.

However, because the loading dock exit onto Braddock Road is within 100 feet of the signalized intersection of Braddock Road and Marlee Way, for safety reasons it is not possible to create a new median break that would allow trucks to turn east on Braddock Road toward the intersection of King Street, Quaker Lane, and Braddock Road. All departing delivery vehicles will therefore have to turn right onto westbound Braddock Road.

Staff has included a condition requiring a delivery management plan, which will instruct drivers of smaller delivery vehicles to exit the loading area onto westbound Braddock Road and then turn right on Marlee Way to the King Street Service Road and then onto King Street. Larger tractor trailer will be unable to utilize this route and will be directed westbound on Braddock Road to Van Dorn Street, which will allow tractor trailers access to I-395 to the north and I-495 to the south.

Citizen concern has been focused primarily on the use of Braddock Road from the Safeway site west to Van Dorn Street. Braddock Road is classified by the city as a Primary Collector, which is the roadway classification below Arterial and above Residential Collector. The portion of Braddock Road between the site and Braddock Road contains eight houses fronting the road, Fort Ward Park, and several school sites.

The applicant collected traffic data to document the existing number of heavy vehicles using Braddock Road between the store site and Van Dorn Street. This data was collected on Tuesday, October 4, 2011, and recorded 44 tractor-trailers utilizing Braddock Road during the 24-hour period. This amounted to 0.3% of all traffic on the roadway during the 24-hour period. The

proposed Safeway store will add three to four additional tractor-trailers per day to Braddock Road. Overall, while recognizing that additional tractor-trailer trips may not be desirable from a homeowner's perspective along this stretch of Braddock Road, the roadway classification as a primary collector and the presence of existing tractor trailer trips along this stretch of roadway lend credence to utilizing this stretch of Braddock Road for the additional three to four tractor trailer trips per day generated by the Safeway site. Staff supports using Braddock Road as the tractor trailer delivery route for the Safeway site.

F. *Building Design/Architecture*

The overall design approach for both buildings is contemporary, which is appropriate for this retail-focused redevelopment in this key location. The contemporary style serves to update the character and visibility of this active commercial center, while utilizing materials and design details which reflect elements of Alexandria's historic character – such brick and slate. Although the applicant is proffering a rezoning in order to gain additional FAR, the building remains under the height limits for the existing zone, at 46 feet tall. The additional floor area is a result of the substantial ceiling heights in the covered parking.

In order to mitigate the visual impacts of garage area contained under the retail level, most of the parking is wrapped with active, usable space, or screened. The wrapped area is along King Street and returns partially along the southern facade in the plaza area. The remainder of the parking along the southern facade will have screening that is architecturally integrated with the building facades. The west elevation, along Braddock Road, is open on the ground floor; however the parking will not be visible from the street as it is set back and screened by the landscaping and bio-retention area.

The length of the longest building facades is approximately 297 feet. The long facades are broken up by recesses and projections of various internal components of the building. For instance, stairwells, entrances, and an upper terrace project from the building, give life and punctuation to the highly visible facades on which they occur. Additionally, the reinterpretation of the traditional brick running bond pattern is utilized to create an alternating motif in conjunction with banding to interrupt the facade and emphasize the horizontality of the building. The roof form, although predominantly flat, at the corner entrance of King Street and the plaza, is lifted upwards, creating a dramatic prow and a larger expanse of glass, to address the major intersection, as well as to draw attention to the primary entrance. The main, upper level of the building is clad in a strongly horizontal façade, which combines glass areas with multiple colors of a thin cement panel system, in a pattern that becomes progressively glassier as it approaches the primary corner. This dematerialization of the building skin creates a dramatic effect when viewed from the nearby intersection, and creates a vibrant counterpoint to the simple massing and brick elevations of the remainder of the building. Project signage is restrained, and is being designed to be fully integrated into the horizontal vocabulary of the primary facades.

The two elevations that are less prominent, those on the north and west, are predominantly brick, but have recessed panels of slate that create a strong rhythm along the building face and add warmth and texture to the material palette. All of these design elements, along with changes in

materials and colors, are employed to visually reduce the perceived length of the building facades.

G. Green Building

The proposal will be consistent with the City's Green Building Policy. The applicant intends to utilize the U.S. Green Building Council's Leadership in Energy and Environmental Design (LEED) green building rating system for new construction. The Green Building Policy for nonresidential development requires attaining LEED Silver Certification or an equivalent certification from another green building rating system. The applicant proposes to achieve LEED Silver Certification.

The proposal will incorporate multiple sustainable design techniques during the design, construction, and maintenance of the project to ensure environmental responsibility. The site selected will be redeveloped and utilize an existing public transportation network. The heat island index will be reduced by covering the majority of the parking with a high solar reflective roof and providing a tree canopy over the remaining surface parking spaces. The landscape materials chosen will be water efficient and assist in the stormwater management for the site in a series of rain gardens. The operations and maintenance of the building will be enhanced with the installation of high efficiency heating and cooling systems. The indoor environmental quality of the building will also be comfortable and green with the utilization of recycled and salvaged materials, low emitting materials, and controlled lighting and thermal systems. Many of these items will be further developed during the final site plan and building permit review process.

H. Pedestrian and Streetscape Improvements

The pedestrian environment and streetscape will be enhanced with the implementation of the proposed improvements. Sidewalks will be widened to a minimum, unobstructed dimension of six feet to allow two people to walk next to each other. Sidewalks will be constructed of concrete, which will provide a smooth travel path for pedestrians. Tree wells will be interconnected and contain the maximum amount of soil volume to allow for healthy root growth and overall vitality for the trees. Street trees will be planted and spaced in a manner compliant with the City's Landscape Guidelines to ensure a consistent canopy along both street frontages. A designated pedestrian path links Braddock Road to King Street and provides a safe route from the street through the parking lot to the two buildings. Overall, staff believes the improvements will make a positive impact on the pedestrian environment, public realm, and circulation of the site.

I. Open Space

The proposal includes approximately 17,405 sq. ft., or 0.4 acres, of ground level open space. The majority of the open space is located within the proposed plaza and rain gardens. The plaza, approximately 2,204 sq. ft., is situated between the Safeway store and the ancillary retail building along King Street. This plaza will have a bosque of trees that will provide a shade canopy for users as well as screen the roof of the ancillary retail building from outdoor diners on the balcony of the Safeway store. The shapes of the planting beds are designed to simulate the

building's offset, reinterpretation of a running bond pattern on the Safeway store façades; resulting in a coordinated landscape and building design. The plaza is envisioned to function as a gathering space as well as serve as part of the front door to both proposed buildings.

A series of rain gardens will serve as open space, bioretention areas, and screening of the surface parking from Braddock Road. There are three separate rain gardens: one south of the ancillary retail building and two along Braddock Road near the vehicular entrances to the site. All three entrances are programed to collect the stormwater runoff from the parking areas. Trees, ornamental grasses, perennials, and shrubs will be planted in the gardens to achieve a natural and water efficient landscape. Low, screen walls are proposed between the parking areas and rain gardens to screen the parked vehicles from the street and shield light spillover from the vehicles' head lights.

J. Landscape Modification

Pursuant to the City's Zoning Ordinance, there should be a planting island per every 10 parking spaces. During the review of the site design, staff noticed the proposed dumpster for the small retail store was located adjacent to the internal pedestrian path. Even if the dumpster were to be screened, staff believed that this condition was not an advantageous location and requested that the dumpster be moved. It became apparent, that when relocating the dumpster, there would be 11 continuous parking spaces and a planting island would be required, eliminating a parking space. The applicant is requesting relief from this requirement. Staff supports the requested modification to not provide the additional planting island given that the applicant is greatly improving the site design and is adding almost 9,000 sq. ft. pervious material to the site.

K. Community Outreach

There has been coordination and outreach with multiple community organizations throughout the various stages of review of the proposal. There was a group of interested community representatives that met earlier in March 2011, prior to any development proposal submission. The first group meeting introduced the potential project and explained the "lifestyle" store concept. The applicant discussed with the group that they looked at many alternative building designs and site layouts to create a more urban design with a strong street presence. After this analysis, the applicant concluded that due to the unique lot configuration and expanded "lifestyle" grocery store footprint, they wanted to proceed with an at-grade parking structure and a second story grocery. This programming is an urban model that they used in Georgetown and has proven to be successful. One of the design elements of the Georgetown store was a high ceiling for the parking structure, providing a more open and less daunting environment. Staff explained that due to the increase in floor height of the parking structure and the way in which floor area is calculated, more FAR would be needed to implement this option and a potential rezoning of the property may be required. The community members who attended this first meeting felt that an improved grocery store would be an asset to the area and agreed that all options for implementing this should be explored.

Staff investigated various alternatives for the site including reconfiguring the parking to be either underground or on the roof. When it became clear that the most viable option was to utilize the

parking configuration that is being proposed – at-grade parking with the retail level above – staff began to explore different ways to address the additional FAR needed to accomplish this. Some of the options explored included: a simple rezoning of the property, a text amendment to the CG Zone District, and a rezoning of the property with “proffers.” These alternatives – including pros and cons - were discussed at a June 2011 meeting that was held with community representatives and, in the end, there was a general consensus that a proffered rezoning would provide the community with the best assurance that only this specific development proposal could move forward on the site.

Subsequently, a development application was submitted and community meetings were held to discuss the development proposal and collect additional community input. Staff and the applicant met with the Northridge Civic Association and the Seminary Hill Civic Association. Additionally, the project was discussed at the September 2011 Federation of Civic Associations meeting. There were also two community meetings that were open to the public and held at City Hall, the second of which in October 2011 was particularly well-attended. The applicant also held informational events at the Safeway store to generate awareness of the application and gain feedback from the community.

It should also be noted, that a web page specifically designed for the Safeway project was accessible on the City's Planning and Zoning website. The web page provided a project narrative, plans, graphics, contact information, and community meeting dates, agenda, and notes. An email list serve was developed from meeting sign-in sheets and was added as another form of outreach.


During these discussions with the community, there has been support for the project, as well as some concerns. The concerns were primarily focused on the increased FAR and mass of the project, any precedent that a rezoning of this site would set, the contemporary architectural design, truck traffic on Braddock Road, and overall traffic concerns in the neighborhood. Staff believes that each of these concerns has been addressed in the staff report and in the conditions that are being recommended.

VI. CONCLUSION


Staff recommends approval subject to compliance with all applicable codes, ordinances, and the following staff recommendations.

Staff: Faroll Hamer, Director of Planning and Zoning
Gwen Wright, Chief, Development Division
Patricia Escher, AICP, Principal Planner
Colleen Willger, AICP, LEED AP BD+C, Urban Planner
Garry Meus, Urban Planner
Matt Melkerson, Transportation and Environmental Services
Megan Cummings, Transportation and Environmental Services

VII. GRAPHICS

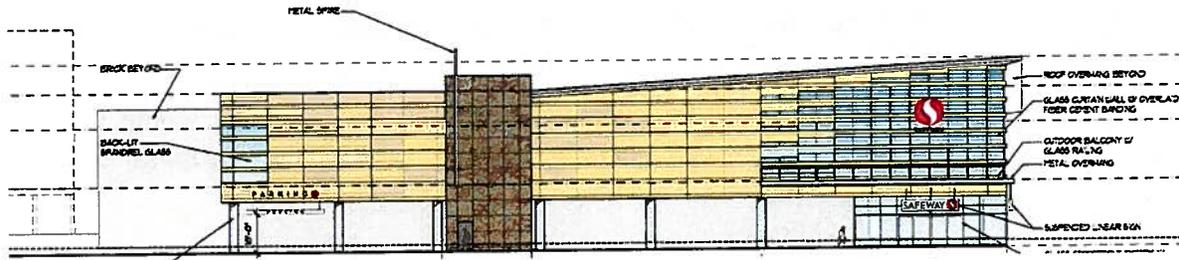


East/Plaza Elevation of Proposed Safeway Store

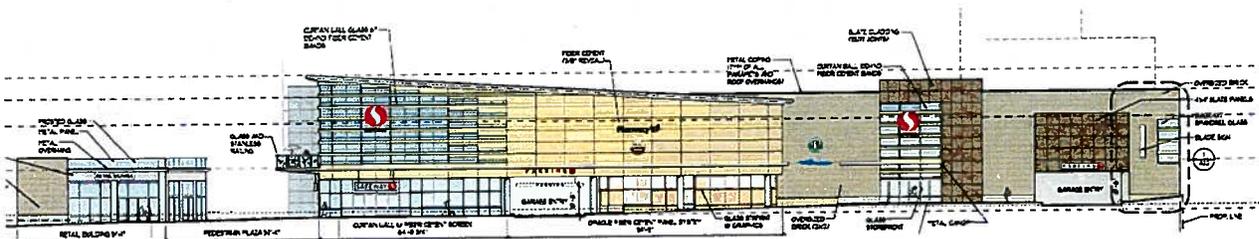

Northeast/King Street Elevation of Proposed Safeway Store and Retail Building



Southwest/Braddock Road Elevation of Proposed Safeway Store and Retail Building

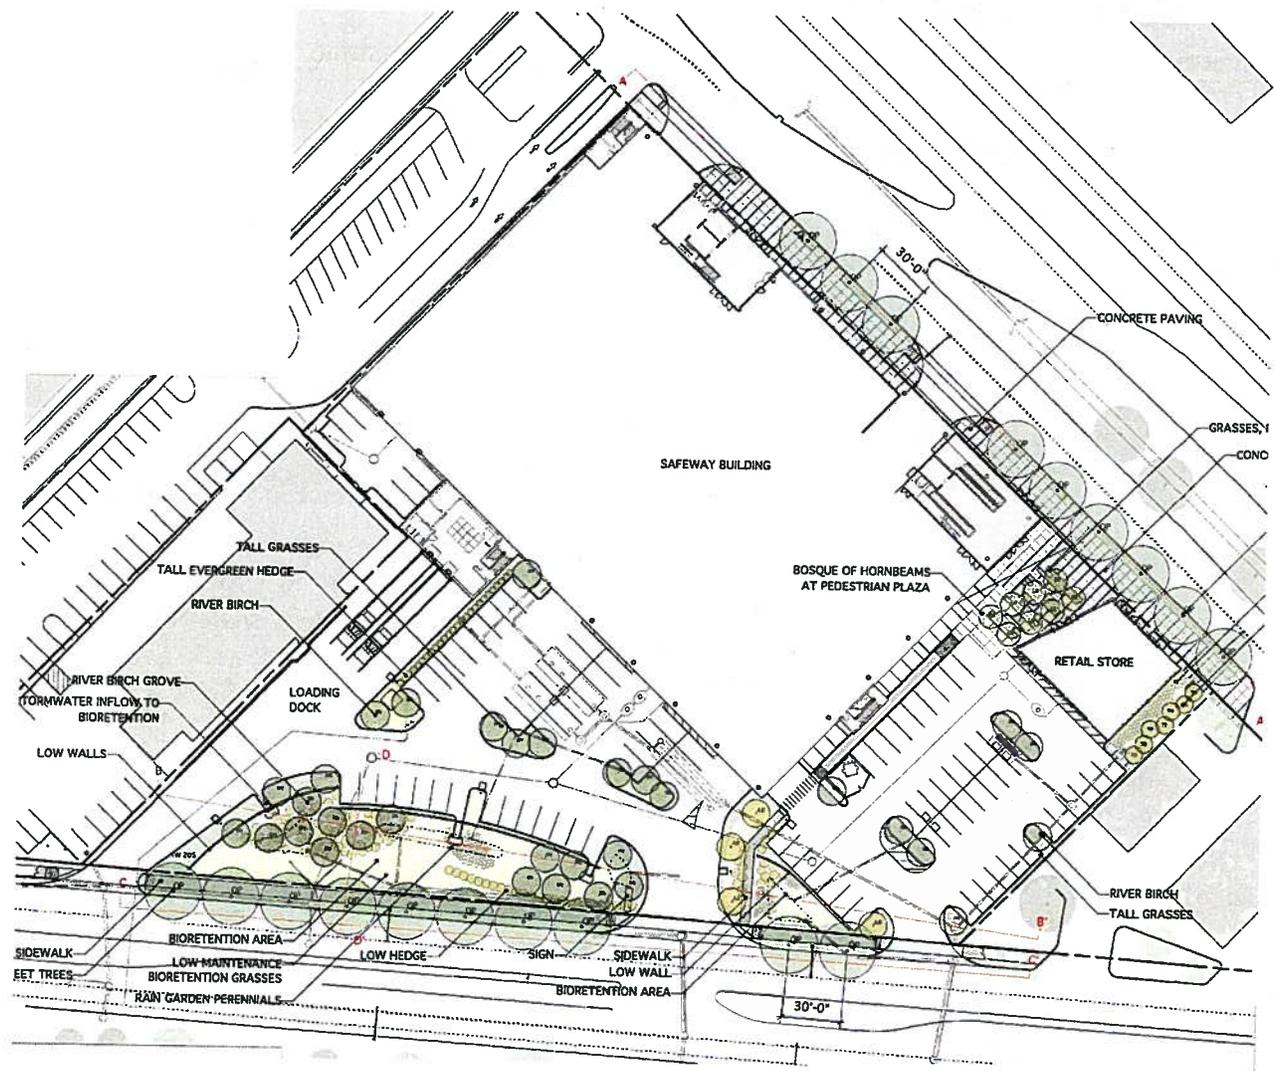

Proposed Site Plan

VIII. STAFF RECOMMENDATIONS

This application is subject to a proffered rezoning of the OC Zone District. See Attachment 2.

DSUP RECOMMENDATIONS

1. The Final Site shall be in substantial conformance with the preliminary plan dated September 14, 2011 and amended September 29, 2011 and comply with the following conditions of approval.

PEDESTRIAN/STREETSCAPE

2. Provide the following pedestrian improvements to the satisfaction of the Directors of P&Z, RP&CA and T&ES:
 - a. Complete all pedestrian improvements prior to the issuance of a certificate of occupancy permit.
 - b. Install ADA accessible pedestrian crossings serving the site.
 - c. Construct all concrete sidewalks in the City right-of-way to City standards. The minimum unobstructed width of newly constructed sidewalks shall be as depicted on the preliminary plan with a minimum of a 10' wide sidewalk and 6' wide planter beds along King Street and 6' wide sidewalk and 4' wide planting strip along Braddock within the City's ROW.
 - d. Sidewalks shall be flush across all driveway crossings.
 - e. All newly constructed curb ramps in Alexandria shall be concrete with detectable warning and shall conform to current VDOT standards.
 - f. Provide separate curb ramps for each direction of crossing (i.e., two ramps per corner). Curb ramps shall be perpendicular to the street to minimize crossing distances. Any changes must be approved by the Director of T&ES.
 - g. Provide thermoplastic pedestrian crosswalks at all crossings within the proposed development, which must be designed to the satisfaction of the Director of T&ES.
 - h. All crosswalks shall be standard, 6" wide, white thermoplastic parallel lines with reflective material, with 10' in width between interior lines. High-visibility crosswalks (white, thermoplastic ladder crosswalks as shown in the Manual on Uniform Traffic Control Devices (MUTCD)) may be required as directed by staff at Final Site Plan. All other crosswalk treatments must be approved by the Director of T&ES.***(P&Z)(T&ES)

CONTRIBUTIONS

3. Provide a contribution of \$181,500.00 prior to release of the Final Site Plan for installation of pedestrian and vehicular improvements in the vicinity of the project. Improvements will be constructed by the City and may include but are not limited to:
 - a. Installation of eight (8) Prisma DAPS pedestrian activated push-buttons in accordance with City Standards at the existing pedestrian crosswalks at the intersection of King Street, Quaker Lane, and Braddock Road. All pedestrian-activated push buttons shall be accessible per ADA Accessibility Guidelines (ADAAG)
 - b. Safety improvements to the bus stop and access point from the Service Road to King Street to minimize potential conflicts between buses and passenger vehicles. Potential improvements include bumping out the curb line at the bus stop and modifying the western median curb line. Design of the improvements shall be included in the Final Site Plan. (T&ES)
 - c. Conversion of the intersection of the King Street Service Road and the Bradlee Shopping Center Driveway from flashing operation to full-color (red/yellow/green) signalized operation.
 - d. Relocation and upgrade of the existing WMATA 28A bus stop located on Braddock Road, west of Marlee Way. (T&ES)
 - e. Conversion of the King Street Service Road from two-way operation to one way eastbound operation at its intersection with Quaker Lane. This conversion shall include construction of a median extension to narrow the existing King Street Service Road cross-section at its intersection with Quaker Lane, and all associated signs and pavement markings required for conversion to one-way operation. * (T&ES)

4. Provide a contribution of \$200,000.00 towards intersection improvements at the adjacent signalized intersection of King Street, Braddock Road, & Quaker Lane. This contribution shall be used for design of additional left turn capacity at the intersection. Payment shall be due within sixty (60) days of design authorization by City Council. (T&ES)

OPEN SPACE/LANDSCAPING

5. Develop, provide, install and maintain an integrated Landscape Plan with the final site plan that is coordinated with other associated site conditions to the satisfaction of the Directors of P&Z. At a minimum the Landscape Plan shall:
 - a. Provide an enhanced level of detail plantings throughout the site (in addition to street trees). Plantings shall include a simple mixture of seasonally variable, evergreen and deciduous shrubs, ornamental and shade trees, groundcovers and perennials that are horticulturally acclimatized to the Mid-Atlantic and Washington, DC National Capital Region.
 - b. Ensure positive drainage in all planted areas.
 - c. Provide details, sections and plan drawings of tree wells showing proposed plantings and associated materials, irrigation, adjacent curb/pavement

- construction, including edge restraint system, dimensions, drainage, and coordination with site utilities.
- d. Provide detail sections showing above and below grade conditions for plantings above a structure.
 - e. Provide planting details for all proposed conditions including street trees, multi-trunk trees, shrubs, perennials, and groundcovers.
 - f. In the planting schedule:
 - i. Provide the cultivars for all proposed planting. Where the *Landscape Guidelines* CCA calculation is dependent on cultivar size, e.g. for tree canopies, ensure that the chosen cultivars are comparable to the CCA rate being taken.
 - ii. Include information on the height of clear stem for each tree species and ensure the trees have sufficient clearance for pedestrian and vehicle conditions as applicable.
 - g. Provide a diversity of species for the trees in the parking lot area, preferably with a larger tree canopy, to aid in the probability of long term survival of the trees in this location.
 - h. All sidewalks and driveways constructed above tree wells shall be structurally supported. Areas of uncompacted growing medium shall not be used to support sidewalks and driveways without additional structural support. Provide section details that verify this requirement.
 - i. Provide an exhibit that verifies the planting in tree wells/trenches, and all planting meets the requirements of the City's *Landscape Guidelines* for growing medium soil volume and depth. (P&Z)
6. Provide an on-site irrigation and/or an overall water management plan developed installed and maintained to the satisfaction of the Directors of P&Z and Code Administration.
- a. Provide an exhibit that demonstrates that all parts of the site can be accessed by a combination of building mounted hose bibs and ground set hose connections.
 - b. Provide external water hose bibs continuous at perimeter of building. Provide at least one, accessible, external, water hose bib on all building sides at a maximum spacing of 90 feet apart.
 - c. Hose bibs, ground set water connections and FDCs must be fully accessible and not blocked by plantings, site utilities or other obstructions.
 - d. Install all lines beneath paved surfaces as sleeved connections.
 - e. Locate water sources and hose bibs in coordination with City Staff.
 - f. Ensure that the irrigation system is compatible with City's remote control Maxicom System. (Code Administration) (P&Z)
7. Develop a palette of site furnishings in consultation with staff.
- a. Provide location and specification for site furnishings that depicts the scale, massing and character of site furnishings to the satisfaction of the Directors of P&Z and T&ES.

- b. Site furnishings shall include benches, bicycle racks, trash receptacles, and other associated features. (P&Z)(T&ES)
8. Provide materials, finishes, and architectural details for all retaining walls, seat walls, decorative walls, and screen walls. Indicate methods for grade transitions, handrails- if required by code, directional changes, above and below grade conditions. Coordinate with adjacent conditions. Design and construction of all walls shall be to the satisfaction of the Directors of P&Z, and T&ES. (P&Z)(T&ES)
9. Hire a professional consultant to work with staff and the landscape designers to incorporate and interpret elements of the historical character and archaeological findings into the design of the open space and to prepare interpretive elements, which shall be erected as part of the development project. The site plan shall indicate themes and locations of interpretive elements. Prior to release of the final site plan, the consultant shall provide text and graphics for the signage subject to approval by the Office of Historic Alexandria/Alexandria Archaeology and the Directors of P&Z.* (Arch)(P&Z)
10. Prior to commencement of landscape installation/planting operations, a pre-installation/construction meeting will be scheduled with the City's Landscape Architects to review the scope of installation procedures and processes. (P&Z)
11. As built documents for all landscape and irrigation installations are required. Refer to the City of Alexandria Landscape Guidelines, Section III A & B. ****(P&Z)
12. The landscape elements of the project shall be subject to the Landscape and Performance Maintenance Bonds, based on the criteria established by the City and available through T&ES. Release of Landscape and Performance Maintenance Bonds are subject to the inspection by City Staff at completion of construction, and at periods of one year and three years after completion. ****(P&Z)

BUILDING

13. The Building elevations shall be in general compliance with the revised elevations that are dated August 26, 2011.
14. Provide the following building refinements to the satisfaction of the Director of P&Z:
 - a. Continue to work with staff to refine the proposed building design and detailing with respect to:
 - i. Enhance the façade treatment along the King Street frontage, particularly the brick module near the western entrance, with the goal of creating pedestrian-friendly façade elements, including, but not limited to, public art, patterns in the brickwork, and variety in the wall materials.
 - ii. Continue to explore the composition of the signage placement as it relates to the building façade detailing. Relocate the signs to the blank brick wall along King Street.

- iii. Screen the ten compact parking spaces abutting the main pedestrian walkway from Braddock Road leading to the main store entrance to Safeway This screening may include landscape and hardscape elements and must fully buffer the cars from the walkway.
 - iv. The ground floor space between the two vestibules of the proposed grocery store building shall be revised to incorporate a retail/community space that creates an active building envelope on King Street and screens the at-grade parking. Additionally, extend the building face to be in front of the columns that are currently exposed along King Street. (P&Z)
15. Building materials, finishes, and relationships shall be subject to review and approval by the Department of Planning and Zoning to the satisfaction of the Director prior to selection of final building materials:
- a. Provide a materials board that includes all proposed materials and finishes at first final site plan. *
 - b. The materials board shall remain with the Department of Planning and Zoning until the final certificate of occupancy, upon which all samples shall be returned to the applicant.***
 - c. Provide drawings of a mock-up panel that depict all proposed materials, finishes, and relationships as part of the first final site plan. *
 - d. Construct a color, on-site, mock-up panel of proposed materials, finishes, and relationships for review and approval prior to final selection of building materials. The mock-up panel shall be constructed and approved prior to release of building permits. **
 - e. The mock-up panel shall be located such that it shall remain on-site in the same location through the duration of construction until the first certificate of occupancy. *** (P&Z)
16. Per the City's Green Building Policy adopted April 18, 2009, achieve a green building certification level of LEED Silver or Equivalent for the grocery store and the small retail store to the satisfaction of the Directors of P&Z, and/or RP&CA and T&ES. Diligent pursuance and achievement of this certification shall be monitored through the following:
- a. Provide evidence of the project's registration with LEED with the submission of the first final site plan.*
 - b. Provide evidence of submission of materials for Design Phase credits to the U.S. Green Building Council (USGBC) prior to issuance of a certificate of occupancy. ***
 - c. Provide evidence of submission of materials for Construction Phase credits to USGBC within six months of obtaining a final certificate of occupancy.
 - d. Provide documentation of LEED Silver Certification from USGBC within two years of obtaining a final certificate of occupancy.
 - e. Failure to achieve LEED Silver Certification, the most current version at the time of the application, for the commercial project will be evaluated by City staff, and if staff determines that a good faith, reasonable, and documented effort was not made to achieve these certification levels, then any City-wide Green Building

policies existing at the time of staff's release of Final Site Plan will apply.
(P&Z)(T&ES)

17. The applicant shall use EPA-labeled WaterSense or equivalent low flow fixtures in all non-food preparation areas to minimize the generation of municipal wastewater from the site and explore the possibilities of adopting water reduction strategies (i.e., use of gray water system on-site) and other measures that could possibly reduce the wastewater generation from this site. A list of applicable mechanisms can be found at [Http://www.epa.gov/WaterSense/pp/index.htm](http://www.epa.gov/WaterSense/pp/index.htm). (T&ES)
18. The applicant shall work with the City for reuse or recycle of the existing building materials as part of the demolition process, including leftover, unused, and/or discarded building materials. (T&ES)(P&Z)
19. The stairwells within the structured parking garage shall be visible as permitted by the Building Code, without solid walls. The balusters shall be open to allow for a clear line of vision. Provide guards that are 42" in height along open sides of the stairways and landings which are located 30" above the floor or grade below. The width between the balusters shall be no wider than 4" and the handrails are to be a minimum of 34" and a maximum of 38". (Police)
20. Elevator lobbies and vestibules shall be visible from the parking garage. The design of the elevator lobbies and vestibules in the parking garage shall be as open as building code permits. (Police)(P&Z)

RETAIL USES

21. Ground floor uses of areas designated on the plan as "retail" shall be limited to retail, restaurant, personal service uses, as defined in the Zoning Ordinance, with the exceptions identified below:
 - a. Retail shopping establishments shall not include appliance stores, auto parts stores, and lawn and garden supply stores;
 - b. Personal service uses shall not include appliance repair and rental, contractors' offices, laundromats, and pawnshops; and
 - c. Other similar pedestrian-oriented uses as approved by the Director of P&Z to meet the intent of providing active pedestrian-oriented neighborhood-serving retail uses are allowed. (P&Z)
22. Ensure the following for the retail areas within the development, to the satisfaction of the Director of P&Z:
 - a. Provide a minimum 14 feet floor to floor height.
 - b. All retail entrances both with the Safeway store and the proposed Retail Building along King Street shall be required to be operable entrances. This requirement shall be included as part of the lease for each tenant.
 - c. The placement or construction of items that block the visibility of the interior of the store from the street and sidewalk (e.g. storage cabinets, carts, shelving,

boxes, coat racks, storage bins, closets, etc.) shall be prohibited. This is not intended to prevent retailers from displaying their goods in display cases that are oriented towards the street frontage. This requirement shall be included as part of the lease for each tenant. (P&Z)

PUBLIC ART

23. Public art shall be incorporated with the project. Potential opportunities for the installation of public art are along the King Street frontage on the building, the screening along the compact spaces on the south of the building, and/or within the open space. The public art shall be reviewed by the Public Art Committee prior to the release of the final site plan and the applicant shall consider the Committee's comments before making the final selection of the public art components. The art shall be fabricated and installed prior to the first certificate of occupancy. (P&Z)

SIGNAGE

24. Design and develop a coordinated sign plan, which includes a color palette, for all proposed signage, including, but not limited to site-related signs, way-finding graphics, business signs, and interpretive signage that highlights the history and archaeology of the site. The plan shall be included as part of the Final Site Plan and shall coordinate the location, scale, massing and character of all proposed signage to the satisfaction of the Directors of Archaeology, P&Z, and T&ES.*
- a. Business signs shall employ variety and creativity of design. Tenant designers shall bring a sculptural and dimensional quality to their signs.
 - b. Highlight the identity of individual business tenants through signage and storefront design. Coordinate signage with the building design and with individual storefront designs, including but not limited to integration with any proposed awnings, canopies, etc.
 - c. Pedestrian-oriented signs (e.g. projecting signs, window signs, etc.) are encouraged. Tenants with main storefront entrances on Street(s) shall incorporate a projecting or under-canopy sign. (Arch)(P&Z)(T&ES)
25. Design business and identification signs to relate in material, color and scale to the building and the tenant bay on which the sign is displayed to the satisfaction of the Director of P&Z.
- a. The business and identification signs shall be designed of high quality materials and sign messages shall be limited to logos and names.
 - b. Installation of building mounted signage shall not damage the building and signage shall comply with all applicable codes and ordinances. (P&Z)
26. Internally illuminated signs are prohibited. Explore the use of exterior illumination. (P&Z)
27. Install a temporary informational sign on the site prior to the approval of the final site plan for the project. The sign shall be displayed until construction is complete or

replaced with a contractor or real estate sign incorporating the required information; the sign shall notify the public of the nature of the upcoming project and shall provide a phone number for public questions regarding the project.* (P&Z)(T&ES)

HOUSING

28. A voluntary contribution of \$1.50 on the commercial square footage \$1.50 X 64,459 gsf for a total estimated contribution of \$96,689. would be consistent with the "Developer Housing Contribution Work Group Report" dated May 2005 and accepted by the Alexandria City Council on June 14, 2005.*** (Housing)

PARKING

29. Provide 14 bicycle parking spaces per Alexandria's current Bicycle Parking Standards. Bicycle parking standards, acceptable rack types for short- and long-term parking and details for allowable locations are available at: www.alexandriava.gov/bicycleparking. (T&ES)
30. Provide a Parking Management Plan with the final site plan submission. The Parking Management Plan shall be approved by the Departments of P&Z and T&ES prior to the release of the final site plan. The Parking Management Plan shall at a minimum include appropriate signage provided for the retail parking indicating hours which are reserved for retail patrons.* (P&Z)(T&ES)
31. All on-street parking controls and shall be determined by the City. Any such controls and restrictions which the applicant desires shall be shown on the final site plan. (P&Z)(T&ES)

TRANSPORTATION MANAGEMENT PLAN

32. According to Article XI of the City's Zoning Ordinance, a Transportation Management Plan is required to implement strategies to persuade employees to take public transportation or share a ride, as opposed to being a sole occupant of a vehicle. The details of the Plan are included in Attachment #1 to the general staff conditions. Below are the basic conditions from which other details originate. (T&ES)
33. Any special use permit granted by City Council under this section 11-700, unless revoked or expired, shall run with the land and shall be mandatory and binding upon the applicant, all owners of the land and all occupants and upon all of their heirs, successors and assigns. Any use authorized by a special use permit granted under this section 11-700 shall be operated in conformity with such permit, and failure to so operate shall be deemed grounds for revocation of such permit, after notice and hearing, by the City Council. (T&ES)
34. Prior to any lease/purchase agreements, the applicant shall prepare appropriate language to inform tenants/owners of the transportation management plan special use permit and

conditions therein, as part of its leasing/purchasing agreements; such language to be reviewed and approved by the City Attorney's office. (T&ES)

35. The applicant shall participate in the revised Transportation Management Program if established. The revised program will include the elements outlined in the December 8, 2010 docket memo to City Council and approved by the Council. The revision to the program includes a periodic review of the TMP to determine if goals are being met and will provide an opportunity to adjust the rates up or down up to a percentage cap. The revised TMP program will go before the City Council for approval. Participation in the program will not initially increase the base contribution established in this SUP, however, the base contribution would be subject to adjustment up or down, up to a percentage cap, based on the final revised TMP program language to be approved by City Council at a future date. (T&ES)
36. The grocery store at 3526 King Street shall integrate into the District Transit Management Program when it is organized. All TMP holders in the established district will be part of this District TMP. The objective of this district is to make optimum use of transportation resources for the benefit of residents and employed through economies of scale. (T&ES)
37. A TMP Coordinator shall be designated for the entire project upon application for the initial building permit. The name, location, email and telephone number of the coordinator will be provided to the City at that time, as well as any changes occurring subsequently. This person will be responsible for implementing and managing all aspects of the TMP and the parking management program for the project. ** (T&ES)
38. The applicant shall create a TMP fund to achieve the reduction goal of 35% of single occupant vehicles for employees, based on the project's size and the benefits to be offered to participating employees. The rate to be charged for this development shall be \$0.25 per square foot of retail space. Annually, to begin one year after the initial CO is issued, the rate shall increase by an amount equal to the rate of inflation (Consumer Price Index - CPI of the United States) for the previous year. The TMP fund shall be used exclusively for the approved transportation activities detailed in the attachment. (T&ES)
39. The Director of T&ES may require that the funds be paid to the City upon determination that the TMP Coordinator or Association has not made a reasonable effort to use the funds for TMP activities. As so determined, any unencumbered funds remaining in the TMP account at the end of each reporting year may be either reprogrammed for TMP activities during the ensuing year or paid to the City for use in transportation support activities which benefit the site. (T&ES)
40. The TMP Coordinator or Association will submit annual reports, fund reports and modes of transportation surveys to the Transportation Planning Division as detailed in the Attachment. (T&ES)

41. An administrative fee shall be assessed to the governing entity for lack of timely compliance with the submission of the TMP mandatory reports required in the attachment (fund reports with supporting documentation, annual reports, survey results with a minimum response rate of 50%, and submission of raw data). The fee shall be in the amount of five hundred (\$500.00) for the first 30 (thirty) days late and two hundred and fifty dollars (\$250.00) for every subsequent month late. The amount of these administrative fees is for the base year in which the TMP is approved and shall increase according to the Consumer Price Index (CPI) going forward. (T&ES)

BUS STOPS AND BUS SHELTERS

42. Show all existing and proposed bus stops adjacent to the site (the Service Road, east of Marlee Way) with associated features, to include shelters, canopies, and benches in the vicinity of the site on the final site plan. Any proposed features shall be ADA compliant; all bus shelters shall include a bench, illumination and real-time information display board to the satisfaction of the Director of T&ES. The final bus shelter, bus canopy, and bus stop bench design shall meet City standards and the approval of the Director of T&ES. (T&ES)
43. Show detail for bench, trash receptacle and store vestibule area which will be used as the 'bus shelter' area adjacent to the Service Road DASH bus stop on the Final Site Plan. (T&ES)
44. Provide an easement to allow relocation of the existing WMATA 28A bus stop located on Braddock Road, west of Marlee Way to an area approximately 275' to the east on Braddock Road between the entrance/exit of the proposed Safeway, adjacent to the bio-retention area. Easement shall be recorded prior to release of the Final Site Plan. (T&ES)
45. Maintenance of bus shelter incorporated into the building façade serving the Service Road DASH stop will be the responsibility of the applicant. (T&ES)
46. Make the relocated bus stop at the Service Road, east of Marlee Way ADA compliant. ADA compliance includes:
- a. Install an unobstructed seven (7) foot wide, parallel to the roadway, by eight (8) foot wide, perpendicular to the curb, bus stop passenger loading pad. The loading pad shall be at the same grade as the sidewalk, connect the curb to the sidewalk, and the pad's surface material shall match the sidewalk. The exiting width of the sidewalk may be counted towards the 8 foot wide perpendicular to the curb area. Passenger loading pads shall never be placed on storm drain inlets, catch basins, and other obstacles that would make the bus stop and bus stop loading pad inaccessible. Show on the Final Site Plan. (T&ES)

47. Ensure that the fifty foot approach to all bus stops adjacent to the site have a minimum 12' clearance free from tree limbs, signs and any other obstructions. (T&ES)

SITE PLAN

48. Per Section 11-418 of the Zoning Ordinance, the development special use permit shall expire and become null and void, unless substantial construction of the project is commenced within 36 months after initial approval and such construction is thereafter pursued with due diligence. The applicant shall provide a written status report to staff 18 months after initial approval to update the City Council on the project status. (P&Z)
49. Submit the plat of consolidation and all applicable easements prior to the final site plan submission. The plat(s) shall be approved and recorded prior to the release of the final site plan.* (P&Z)
50. Coordinate location of site utilities with other site conditions to the satisfaction of the Directors of P&Z and/or RP&CA, and T&ES. These items include:
- a. Location of site utilities including above grade service openings and required clearances for items such as transformers, telephone, HVAC units and cable boxes.
 - b. Minimize conflicts with plantings, pedestrian areas and major view sheds.
 - c. All transformers shall be screened from public right-of-ways and open spaces.
 - d. Do not locate above grade utilities in dedicated open space areas. P&Z)(T&ES)
51. Provide a lighting plan with the final site plan to verify that lighting meets City standards. The plan shall be to the satisfaction of the Directors of T&ES, P&Z, and/or RP&CA in consultation with the Chief of Police and shall include the following:
- a. Clearly show location of all existing and proposed street lights and site lights, shading back less relevant information.
 - b. A lighting schedule that identifies each type and number of all fixtures, mounting height, and strength of fixture in Lumens or Watts.
 - c. Manufacturer's specifications and details for all proposed fixtures including site, landscape, pedestrian, sign(s) and security lighting.
 - d. A photometric plan with lighting calculations that include all existing and proposed light fixtures, including any existing street lights located on the opposite side(s) of all adjacent streets. Photometric calculations must extend from proposed building face(s) to property line and from property line to the opposite side(s) of all adjacent streets and/or 20 feet beyond the property line on all adjacent properties and rights-of-way. Show existing and proposed street lights and site lights.
 - e. Photometric site lighting plan shall be coordinated with architectural/building mounted lights, site lighting, street trees and street lights to minimize light spill into adjacent residential areas.
 - f. Provide location of conduit routing between site lighting fixtures so as to avoid conflicts with street trees.

- g. Detail information indicating proposed light pole and footing in relationship to adjacent grade or pavement. All light pole foundations shall be concealed from view.
 - h. The lighting for the areas not covered by the City of Alexandria' standards shall be designed to the satisfaction of Directors of T&ES and P&Z.
 - i. Provide numeric summary for various areas (i.e., roadway, walkway/ sidewalk, alley, and parking lot, etc.) in the proposed development.
 - j. The walls and ceilings in the garage must be painted white or dyed concrete (white) to increase reflectivity and improve lighting levels at night.
 - k. The lighting for the covered parking shall be a minimum of 5.0 foot candle maintained. The fixtures should not be flush against the ceiling, unless there are no cross beams, but should hang down at least to the crossbeam to provide as much light spread as possible.
 - l. Full cut-off lighting shall be used at the development site to prevent light spill onto adjacent properties. (P&Z)(T&ES)(Police)
52. The Emergency Vehicle Easement (EVE) shall not be painted. When an EVE is shared with a pedestrian walkway or consists of grasscrete or a similar surface treatment, the EVE shall be defined in a manner that is compatible with the surrounding ground plane. (P&Z)

CONSTRUCTION

53. Submit a construction phasing plan to the satisfaction of the Director of T&ES, for review, approval and partial release of Erosion and Sediment Control for the final site plan. In addition, building and construction permits required for site preconstruction shall be permitted prior to release of the final site plan to the satisfaction of the Director of T&ES. * (T&ES)
54. Submit a construction management plan for review and approval by the Directors of P&Z, T&ES and Code Administration prior to final site plan release. The plan shall:
- a. Include a plan for temporary pedestrian and vehicular circulation;
 - b. Include the overall schedule for construction and the hauling route;
 - c. Copies of the plan shall be posted in the construction trailer and given to each subcontractor before they commence work;
 - d. If the plan is found to be violated during the course of construction, citations will be issued for each infraction and a correction notice will be forwarded to the applicant. If the violation is not corrected within five (5) calendar days, a "stop work order" will be issued, with construction halted until the violation has been corrected. * (P&Z)(T&ES)(Code)

55. Provide off-street parking for all construction workers without charge to the construction workers. For the construction workers who use Metro, DASH, or another form of mass transit to the site, the applicant shall subsidize a minimum of 50% of the fees for mass transit. Compliance with this condition shall be a component of the construction management plan, which shall be submitted to the Department of P&Z and T&ES prior to final site plan release. This plan shall:
- a. Establish the location of the parking to be provided at various stages of construction, how many spaces will be provided, how many construction workers will be assigned to the work site, and mechanisms which will be used to encourage the use of mass transit.
 - b. Provide for the location on the construction site at which information will be posted regarding Metro schedules and routes, bus schedules and routes.
 - c. If the plan is found to be violated during the course of construction, a correction notice will be issued to the developer. If the violation is not corrected within five (5) days, a "stop work order" will be issued, with construction halted until the violation has been corrected. * (P&Z)(T&ES)
56. The sidewalks shall remain open during construction or pedestrian access shall be maintained to the satisfaction of the Director of T&ES throughout the construction of the project. (T&ES)
57. No major construction staging shall be allowed within the public right-of-way on King Street and W. Braddock Road and within the King Street Service Road. The applicant shall meet with T&ES to discuss construction staging activities prior to release of any permits for ground disturbing activities. ** (T&ES)
58. Any structural elements that extend into the public right of way, including but not limited to footings, foundations, tie-backs etc., must be approved by the Director of T&ES as a part of the Sheeting and Shoring Permit. (T&ES)
59. A "Certified Land Disturber" (CLD) shall be named in a letter to the Division Chief of Construction & Inspection prior to any land disturbing activities. If the CLD changes during the project, that change must be noted in a letter to the Division Chief. A note to this effect shall be placed on the Phase I Erosion and Sediment Control sheets on the site plan. (T&ES)
60. Prior to commencing clearing and grading of the site, the applicant shall hold a meeting with notice to all adjoining property owners and civic associations to review the location of construction worker parking, plan for temporary pedestrian and vehicular circulation, and hours and overall schedule for construction. The Departments of P&Z and T&ES shall be notified of the date of the meeting before the permit is issued. (P&Z)(T&ES)

61. Identify a person who will serve as a liaison to the community throughout the duration of construction. The name and telephone number, including an emergency contact number, of this individual shall be provided in writing to residents, property managers and business owners whose property abuts the site and shall be placed on the project sign, to the satisfaction of the Directors of P&Z, and T&ES. (P&Z)(T&ES)
62. Implement a waste and refuse control program during the construction phase of this development. This program shall control wastes such as discarded building materials, concrete truck washout, chemicals, litter or trash, trash generated by construction workers or mobile food vendor businesses serving them, and all sanitary waste at the construction site and prevent offsite migration that may cause adverse impacts to neighboring properties or to the environment to the satisfaction of Directors of T&ES and Code Administration. All wastes shall be properly disposed offsite in accordance with all applicable federal, state and local laws. (T&ES)
63. Temporary construction and/or on-site sales trailer(s) shall be permitted and be subject to the approval of the Director of P&Z. The trailer(s) shall be removed prior to the issuance of a final certificate of occupancy permit. *** (P&Z)
64. Submit a wall check prior to the commencement of construction of the first floor above grade framing for the buildings. The wall checks shall include the building footprint, as depicted in the approved final site plan, the top-of-slab elevation and the first floor elevation. The wall checks shall be prepared and sealed by a registered professional engineer or surveyor, and shall be approved by P&Z prior to commencement of framing. (P&Z)
65. Submit a height certification and a location survey for all site improvements to the Department of P&Z as part of the request for a certificate of occupancy permit. The height certification and the location survey shall be prepared and sealed by a registered architect, engineer, or surveyor. The height certification shall state that the height was calculated based on all applicable provisions of the Zoning Ordinance. *** (P&Z)
66. Contractors shall not cause or permit vehicles to idle for more than 10 minutes when parked. (T&ES)

STORMWATER

67. All storm structures proposed within the public right of way shall be City Standard structures. (T&ES)

WASTEWATER / SANITARY SEWERS

68. The applicant shall submit a letter to the Director of Transportation & Environmental Services prior to release of the final site plan acknowledging that this property will participate, if the City adopts a plan prior to release of the building permit, to require equal and proportionate participation in an improvements plan to mitigate wet weather surcharging in the Holmes Run Trunk Sewer sanitary sewer shed. (T&ES)

SOLID WASTE

69. Provide \$1,150 per receptacle to the Director of T&ES for purchase and installation of four (4) Iron Site Bethesda Series, Model SD-42 decorative black metal trash cans with domed lid by Victor Stanley. The receptacle(s) shall be placed in the public right of way to serve open space and park sites. Receptacles shall be generally located along the property frontage and at strategic locations in the vicinity of the site as approved by the Director of T&ES. Payment required prior to release of Final Site Plan.* (T&ES)
70. The location of the proposed dumpsters for the project shall be in proximity to employee access of the respective buildings, accessible for trash truck maneuverability, screened appropriately, and not be located as to impact the pedestrian environment. (T&ES) (P&Z)

STREETS / TRAFFIC

71. If the City's existing public infrastructure is damaged during construction, or patch work required for utility installation then the applicant shall be responsible for construction/installation or repair of the same as per the City of Alexandria standards and specifications and to the satisfaction of Director, Transportation and Environmental Services. (T&ES)
72. A pre-construction walk/survey of the site shall occur with Transportation and Environmental Services Construction and Inspection staff to document existing conditions prior to any land disturbing activities. (T&ES)
73. Submit a Traffic Control Plan as part of the final site plan, for construction detailing proposed controls to traffic movement, lane closures, construction entrances, haul routes, and storage and staging shall be provided for informational purposes. In addition, the Traffic Control Plan shall be amended as necessary and submitted to the Director of T&ES along with the Building and other Permit Applications as required. The Final Site Plan shall include a statement "FOR INFORMATION ONLY" on the Traffic Control Plan Sheets. (T&ES)
74. Mark all private street signs that intersect a public street with a fluorescent green strip to notify the plowing crews, both City and contractor, that they are not to plow those streets. (T&ES)

75. All Traffic Control Device design plans, Work Zone Traffic Control plans, and Traffic Studies shall be signed and sealed by a professional engineer, registered in the Commonwealth of Virginia. (T&ES)
76. Show turning movements of standard vehicles in the parking structure and/or parking lots. Show turning movements of the largest delivery vehicle projected to use the loading dock. Turning movements shall meet AASHTO vehicular guidelines and shall be to the satisfaction of the Director of T&ES. (T&ES)
77. All 90 degree vehicle parking spaces adjacent to a sidewalk less than seven feet shall have wheel stops. (T&ES)
78. Provide a Delivery Management Plan with the final site plan submission. The Delivery Management Plan shall be approved by the Departments of P&Z and T&ES prior to the release of the final site plan and shall at a minimum include the following:
 - a. Large tractor trailer trucks (WB-62 or larger) shall enter and exit the site from west-bound Braddock Road only.
 - b. All other delivery vehicles shall be directed to exit the site from west-bound Braddock Road to Marlee Way and King Street.
 - c. The plan shall be provided to all delivery vehicles which access the site.*
 - d. Mitigate noise impacts to the adjacent neighborhood from deliveries, loading and unloading activities in concurrence with the noise code. (P&Z)(T&ES)

UTILITIES

79. Locate all private utilities outside of the public right-of-way and public utility easements. (T&ES)

WATERSHED, WETLANDS, & RPAs

80. The storm water collection system is located within the Taylor Run watershed. All on-site storm water curb inlets and public curb inlets within 50 feet of the property line shall be duly marked using standard City markers, or to the satisfaction of the Director of T&ES. (T&ES)

BMP FACILITIES

81. The City of Alexandria's storm water management regulations regarding water quality are two-fold: first, phosphorus removal requirement and second, water quality volume default. Compliance with the phosphorus requirement does not relieve the applicant from the water quality default requirement. The water quality volume determined by the site's proposed impervious area shall be treated in a Best Management Practice (BMP) facility. (T&ES)

82. Provide BMP narrative and complete pre and post development drainage maps that include areas outside that contribute surface runoff from beyond project boundaries to include adequate topographic information, locations of existing and proposed storm drainage systems affected by the development, all proposed BMPs and a completed Worksheet A or B and Worksheet C, as applicable. (T&ES)
83. The storm water Best Management Practices (BMPs) required for this project shall be constructed and installed under the direct supervision of the design professional or his designated representative. Prior to release of the performance bond, the design professional shall submit a written certification to the Director of T&ES that the BMPs are:
 - a. Constructed and installed as designed and in accordance with the approved Final Site Plan.
 - b. Clean and free of debris, soil, and litter by either having been installed or brought into service after the site was stabilized. **** (T&ES)
84. Surface-installed storm water Best Management Practice (BMP) measures, i.e. Bio-Retention Filters, Vegetated Swales, etc. that are employed for this site, require installation of descriptive signage to the satisfaction of the Director of T&ES. (T&ES)
85. Submit two originals of the storm water quality BMP Maintenance Agreement with the City to be reviewed as part of the Final #2 Plan. The agreement must be executed and recorded with the Land Records Division of Alexandria Circuit Court prior to approval of the final site plan.* (T&ES)
86. The Applicant/Owner shall be responsible for installing and maintaining storm water Best Management Practices (BMPs). The Applicant/Owner shall execute a maintenance service contract with a qualified private contractor for a minimum of three years and develop an Owner's Operation and Maintenance Manual for all Best Management Practices (BMPs) on the project. The manual shall include at a minimum: an explanation of the functions and operations of the BMP(s); drawings and diagrams of the BMP(s) and any supporting utilities; catalog cuts on maintenance requirements including mechanical or electrical equipment; manufacturer contact names and phone numbers; a copy of the executed maintenance service contract; and a copy of the maintenance agreement with the City. A copy of the contract shall also be placed in the BMP Operation and Maintenance Manual. Prior to release of the performance bond, a copy of the maintenance contract shall be submitted to the City. ****(T&ES)
87. Submit a copy of the Operation and Maintenance Manual to the Office of Environmental Quality on digital media prior to release of the performance bond. ****(T&ES)

88. Prior to release of the performance bond, the Applicant is required to submit a certification by a qualified professional to the satisfaction of the Director of T&ES that any existing storm water management facilities adjacent to the project and associated conveyance systems were not adversely affected by construction operations. If maintenance of the facility or systems were required in order to make this certification, provide a description of the maintenance measures performed. ****(T&ES)

CONTAMINATED LAND

89. Indicate whether or not there is any known soil and groundwater contamination present as required with all preliminary submissions. Should any unanticipated contamination, underground storage tanks, drums or containers be encountered at the site, the Applicant must immediately notify the City of Alexandria Department of Transportation and Environmental Services, Office of Environmental Quality. (T&ES)
90. Design and install a vapor barrier and ventilation system for buildings and parking areas in order to prevent the migration or accumulation of methane or other gases, or conduct a study and provide a report signed by a professional engineer showing that such measures are not required to the satisfaction of Directors of T&ES and Code Administration. (T&ES)
91. The final site plan shall not be released, and no construction activity shall take place until the following has been submitted and approved by the Director of T&ES:
- a. Submit a Site Characterization Report/Extent of Contamination Study detailing the location, applicable contaminants, and the estimated quantity of any contaminated soils and/or groundwater at or in the immediate vicinity of the site.
 - b. Submit a Risk Assessment indicating any risks associated with the contamination.
 - c. Submit a Remediation Plan detailing how any contaminated soils and/or groundwater will be dealt with, including plans to remediate utility corridors. Utility corridors in contaminated soil shall be over excavated by 2 feet and backfilled with "clean" soil.
 - d. Submit a Health and Safety Plan indicating measures to be taken during remediation and/or construction activities to minimize the potential risks to workers, the neighborhood, and the environment.
 - e. Applicant shall submit 3 hard copies and 2 electronic copies of the above. The remediation plan must be included in the Final Site Plan. * (T&ES)

NOISE

92. All exterior loudspeakers shall be prohibited and no amplified sound shall be audible at the property line. (T&ES)
93. If a restaurant use is proposed, the use of loudspeakers or musicians outside is prohibited. (T&ES)

AIR POLLUTION

94. Kitchen equipment shall not be cleaned outside, nor shall any cooking residue be washed into any street, alley, or storm sewer. (T&ES)
95. No material may be disposed of by venting into the atmosphere. (T&ES)
96. Control odors and any other air pollution sources resulting from operations at the site and prevent them from leaving the property or becoming a nuisance to neighboring properties, as determined by the Director of Transportation and Environmental Services. (T&ES)

ARCHAEOLOGY

97. To insure that important information about Alexandria's past is not lost as a result of this development project, the developer shall hire an archaeological consultant to complete a Documentary Study, followed by an Archaeological Evaluation if historical research determines there is potential for significant resources to be present. If such resources are discovered during the Archaeological Evaluation, the consultant shall complete a Resource Management Plan, as outlined in the City of Alexandria Archaeological Standards. Preservation measures presented in the Resource Management Plan, as approved by the City Archaeologist, will be implemented. The Documentary Study shall be completed prior to submission of the first Final Site Plan for review.
98. Call Alexandria Archaeology immediately (703-838-4399) if any buried structural remains (wall foundations, wells, privies, cisterns, etc.) or concentrations of artifacts are discovered during development. Work must cease in the area of the discovery until a City archaeologist comes to the site and records the finds. The language noted above shall be included on all final site plan sheets involving any ground disturbing activities. (Archaeology)
99. The applicant shall not allow any metal detection and/or artifact collection to be conducted on the property, unless authorized by Alexandria Archaeology. Failure to comply shall result in project delays. The language noted above shall be included on all final site plan sheets involving any ground disturbing activities. (Archaeology)
100. The final site plan shall not be released until the City Archaeologist confirms that all archaeological field work has been completed or that an approved Resource Management Plan is in place.
101. Certificates of Occupancy shall not be issued for this property until interpretive elements have been constructed, interpretive markers have been erected, and the final archaeological report has been received and approved by the City Archaeologist.

CITY DEPARTMENT CODE COMMENTS

Legend: C - Code Requirement R - Recommendation S - Suggestion F - Finding

Planning and Zoning

- R-1. For all first floor bays with a street-facing door providing their primary access, please coordinate with the Geographic Information Systems (GIS) Division for address assignments at tenant fit out. These uses are not permitted to use the primary building address as their address. Please contact the Addressing Coordinator in the GIS Division (703-838-4884) as each new tenant is determined, and an appropriate address based on the location of the primary entrance door of the new space will be assigned.
- F - 1. Sheets C-4B and C-8; provide a scale no less than 1"=40'.
- F - 2. Sheet PH1 and PH2; provide the date the plan was prepared/last revised.
- F - 3. Sheet C-3; provide the following:
- Roadway widths and uses, including right turn and left turn lanes.
 - Indicate height of existing buildings.
 - Show current zoning for adjoining properties.
- F - 4. Sheets C-4 and C-4A; provide traffic volumes at all site entrances and exits.
- F - 5. Sheet LP100; provide the following:
- Depict all utilities; proposed and those to remain.
 - Denote any existing vegetation to be removed. Include location, size, and species.
- F - 6. Correct the project address in the DSUP application. The DSUP application mistakenly references 3626 King Street.
- F - 7. The small retail building will be assigned a new address by the City's Addressing Coordinator.
- F - 8. Sheet C-1; clarify the increase in gross square footage, net square footage, and building height for the Lifestyle Safeway Store and the Retail Building with this submission from the previous Concept Phase submission noted within the Narrative and Zoning Tabulation.
- F - 9. Sheet C-4; provide the following:
- Tops and bottoms of all retaining and landscape walls;
 - Relocate proposed transformer pad out of the open space near the loading dock. If this transformer cannot be relocated, then do not count this area towards open space. Additionally, provide height of transformer and ensure proper screening.

- c. The call out for the retail dumpster directs reviewers to architectural plans for details of the screen wall and decorative gate; however no such details are provided. Coordinate sheets and provide the respective details.
- d. The landscape walls are shown intersecting with the drainage path the stormwater runoff uses to enter the rain gardens. Provide a detail that depicts stormwater runoff will not be impeded by the landscape walls. If a break in the wall is deemed necessary, update all plan sheets accordingly, as this condition is depicted on multiple sheets.
- e. Clarify the proposed three (3) different entrances to the proposed retail building.
- f. Clarify the increase in gross square footage, net square footage, and building height for the Lifestyle Safeway Store and the Retail Building with this submission from the previous Concept Phase submission.
- g. Clarify the change in traffic directions within the proposed Retail Building from the previous Concept Phase submittal from one-way traffic to two-way traffic.

F - 10. Sheet C-5; clarify the 2%Max slope from the proposed plaza area draining toward the parking instead of being directed toward the proposed Bioretention Area 5. This could in turn be clarified through demonstrating the Drainage Divides within the following Preliminary Site Plan submittal.

F - 11. Sheet LP100; provide the following:

- a. Coordinate the planting materials, sizes, and amounts depicted in the landscape sections on sheet LP500 with the planting plan. The planting plan looks significantly deficient in plantings as compared to the sections.
- b. Restudy the use of the hedge in the bioretention area and explore employing more organic forms.
- c. Assure that the base information for the design remains consistent with other plan drawings; i.e.: the proposed sidewalk materials along King Street are to be consistent with the rest of the submitted drawings within the plan set.
- d. Exchange the *Betula Nigra* proposed in the parking islands for a species with a larger, more extensive canopy. This increase in canopy should help with LEED points for covered parking and reducing the heat island index.
- e. Remove the triangular shaped planting area/parking island/median shown between the parking spaces and the drive aisle near the south corner of the building.
- f. Coordinate Plant Key label for *Betula Nigra* and the labels shown on the plan. The Plant Key shows RB but the plan shows BN.
- g. Remove note in Crown Coverage Calculation table that says the *Carpinus Betulus* account for 50% of the CCA. That calculation is inaccurate.
- h. Include all proposed materials (trees, shrubs, etc.) within the plant schedule for the project.

F - 12. Sheet LP500; provide information on the materials and details for the proposed low decorative walls proposed for the bioretention areas.

- F - 13. Sheet PH1; provide the following:
- a. Footcandle readings for the plaza area between the Safeway and retail buildings.
 - b. Footcandle readings for the right-of-ways, specifically the sidewalks, along King Street and Braddock Road.
- F - 14. Sheet PH2; please note that at final site plan additional information regarding the finishes and mounting heights of the fixtures will be requested.
- F - 15. Sheet A1.0; coordinate doorway to south stairwell with elevations. The elevations show a door to the outside of the building, not to the parking garage. Additionally, consider revising the door to swing outwards into the garage.
- F - 16. Sheet A2.1; provide the following:
- a. The detailing and materials of the prominent glass corner are critical to the success of the building. Provide details of the glass curtain wall and banding.
 - b. The horizontal banding on the glass corner over the main Safeway building entrance appears to project beyond the glass. Incorporate this projection into the remainder of the building where the banding occurs. For instance, the northwest and southeast corners, as well as the secondary entrance on the north elevation.
 - c. Explore extending the horizontal banding several inches into the brick walls.
 - d. Explore enhancing the architectural character of the oversized brick area between Vestibule 2 and the Opaque Fiber Cement Panel System. Explore using the Fiber Cement Bands as features for this area.
 - e. Provide a slate panel above the garage entrance on the south elevation.
- C -1. As-built documents for all landscape and irrigation installations are required to be submitted with the Site as-built and request for Performance Bond release. Refer to City of Alexandria Landscape Guidelines, Section III A & B. **** (P&Z)(T&ES)
- C-2. The landscape elements of this development shall be subject to the Performance and Maintenance bonds, based on criteria established by the City and available through T&ES. Release of Performance and Maintenance Bonds are subject to inspections by City staff per City Code requirements. A final inspection for landscaping is also required three years after completion. **** (P&Z)(T&ES)

Transportation and Environmental Services

- F - 1. Since the record drawings, maps, and other documents of the City of Alexandria, State, and Federal agencies show the true north pointing upwards, therefore, the Site Plan shall show the true north arrow pointing upward as is customary; however, for the sake of putting the plan together and/or ease of understanding, the project north arrow pointing upward, preferably east, or west may be shown provided it is consistently shown in the same direction on all the sheets with no exception at all. The north arrow shall show the source of meridian. The project north arrow pointing downward will not be acceptable even if, it is shown consistently on all the sheets. (T&ES)

- F - 2. The Final Site Plan must be prepared per the requirements of Memorandum to Industry 02-09 dated December 3, 2009, Design Guidelines for Site Plan Preparation, which is available at the City's following web address:

<http://alexandriava.gov/uploadedFiles/tes/info/Memo%20to%20Industry%20No.%2002-09%20December%203.%202009.pdf>

- F - 3. The plan shall show sanitary and storm sewer, and water line in plan and profile in the first final submission and cross reference the sheets on which the plan and profile is shown, if plan and profile is not shown on the same sheet. Clearly label the sanitary and storm sewer, or water line plans and profiles. Provide existing and proposed grade elevations along with the rim and invert elevations of all the existing and proposed sanitary and storm sewer at manholes, and water line piping at gate wells on the respective profiles. Use distinctive stationing for various sanitary and storm sewers (if applicable or required by the plan), and water line in plan and use the corresponding stationing in respective profiles. (T&ES)
- F - 4. The Plan shall include a dimension plan with all proposed features fully dimensioned and the property line clearly shown. (T&ES)
- F - 5. Include all symbols, abbreviations, and line types in the legend. (T&ES)
- F - 6. All storm sewers shall be constructed to the City of Alexandria standards and specifications. Minimum diameter for storm sewers shall be 18" in the public Right of Way (ROW) and the minimum size storm sewer catch basin lead is 15". The acceptable pipe materials will be AWWA C-151 (ANSI A21.51) Class 52 or Reinforced Concrete Pipe (RCP) ASTM C-76 Class IV. For roof drainage system, Polyvinyl Chloride (PVC) ASTM D-3034-77 SDR 26 and ASTM 1785-76 Schedule 40 pipes will be acceptable. The acceptable minimum and maximum velocities will be 2.0 fps and 15 fps, respectively. The storm sewers immediately upstream of the first manhole in the public Right of Way shall be owned and maintained privately (i.e., all storm drains not shown within an easement or in a public Right of Way shall be owned and maintained privately). (T&ES)
- F - 7. All sanitary sewers shall be constructed to the City of Alexandria standards and specifications. Minimum diameter of sanitary sewers shall be 10" in the public Right of Way and sanitary lateral 6" for all commercial and institutional developments; however, a 4" sanitary lateral will be acceptable for single family residences. The acceptable pipe materials will be Polyvinyl Chloride (PVC) ASTM D-3034-77 SDR 26, ASTM 1785-76 Schedule 40, Ductile Iron Pipe (DIP) AWWA C-151 (ANSI A21.51) Class 52, or reinforced concrete pipe ASTM C-76 Class IV (For 12" or larger diameters); Class III may be acceptable on private properties. The acceptable minimum and maximum velocities will be 2.5 fps and 10 fps, respectively. Laterals shall be connected to the sanitary sewer through a manufactured "Y" or "T" or approved sewer saddle. Where the

laterals are being connected to existing Terracotta pipes, replace the section of main and provide manufactured "Y" or "T", or else install a manhole. (T&ES)

- F - 8. Lateral Separation of Sewers and Water Mains: A horizontal separation of 10' (edge to edge) shall be provided between a storm or sanitary sewer and a water line; however, if this horizontal separation cannot be achieved then the sewer and water main shall be installed in separate trenches and the bottom of the water main shall be at least 18" above of the top of the sewer. If both the horizontal and vertical separations cannot be achieved then the sewer pipe material shall be Ductile Iron Pipe (DIP) AWWA C-151 (ANSI A21.51) Class 52 and pressure tested in place without leakage prior to installation.(T&ES)
- F - 9. Crossing Water Main Over and Under a Sanitary or Storm Sewer: When a water main over crosses or under crosses a sanitary / storm sewer then the vertical separation between the bottom of one (i.e., sanitary / storm sewer or water main) to the top of the other (water main or sanitary / storm sewer) shall be at least 18" for sanitary sewer and 12" for storm sewer; however, if this cannot be achieved then both the water main and the sanitary / storm sewer shall be constructed of Ductile Iron Pipe (DIP) AWWA C-151 (ANSI A21.51) Class 52 with joints that are equivalent to water main standards for a distance of 10 feet on each side of the point of crossing. A section of water main pipe shall be centered at the point of crossing and the pipes shall be pressure tested in place without leakage prior to installation. Sewers crossing over the water main shall have adequate structural support (concrete pier support and/or concrete encasement) to prevent damage to the water main. Sanitary sewers under creeks and storm sewer pipe crossings with less than 6" clearance shall be encased in concrete. (T&ES)
- F - 10. No water main pipe shall pass through or come in contact with any part of sanitary / storm sewer manhole. Manholes shall be placed at least 10 feet horizontally from the water main whenever possible. When local conditions prohibit this horizontal separation, the manhole shall be of watertight construction and tested in place. (T&ES)
- F - 11. Crossing Existing or Proposed Utilities: Underground telephone, cable T.V., gas, and electrical duct banks shall be crossed maintaining a minimum of 12" of separation or clearance with water main, sanitary, or storm sewers. If this separation cannot be achieved then the sewer pipe material shall be Ductile Iron Pipe (DIP) AWWA C-151 (ANSI A21.51) Class 52 for a distance of 10 feet on each side of the point of crossing and pressure tested in place without leakage prior to installation. Sanitary / storm sewers and water main crossing over the utilities shall have adequate structural support (pier support and/or concrete encasement) to prevent damage to the utilities. (T&ES)
- F - 12. Dimensions of parking spaces, aisle widths, etc. within the parking garage shall be provided on the plan. Note that dimensions shall not include column widths. (T&ES)
- F - 13. Show the drainage divide areas on the grading plan or on a sheet showing reasonable information on topography along with the structures where each sub-area drains. (T&ES)

- F - 14. Provide proposed elevations (contours and spot shots) in sufficient details on grading plan to clearly show the drainage patterns. (T&ES)
- F - 15. All the existing and proposed public and private utilities and easements shall be shown on the plan and a descriptive narration of various utilities shall be provided. (T&ES)
- F - 16. The Traffic Control Plan shall replicate the existing vehicular and pedestrian routes as nearly as practical and the pedestrian pathway shall not be severed or moved for non-construction activities such as parking for vehicles or the storage of materials or equipment. Proposed traffic control plans shall provide continual, safe and accessible pedestrian pathways for the duration of the project. (T&ES)
- C - 1 Per the requirements of the City of Alexandria Zoning Ordinance Article XI, the applicant shall complete a drainage study and adequate outfall analysis for the total drainage area to the receiving sewer that serves the site. If the existing storm system is determined to be inadequate then the applicant shall design and build on-site or off-site improvements to discharge to an adequate outfall; even if the post development storm water flow from the site is reduced from the pre-development flow. The Plan shall demonstrate to the satisfaction of the Director of T&ES that a non-erosive stormwater outfall is present. (T&ES)
- C - 2 Per the requirements of the City of Alexandria Zoning Ordinance (AZO) Article XIII, the applicant shall comply with the peak flow requirements and prepare a Stormwater Management Plan so that from the site, the post-development peak runoff rate from a two-year storm and a ten-year storm, considered individually, shall not exceed their respective predevelopment rates. If combined uncontrolled and controlled stormwater outfall is proposed, the peak flow requirements of the Zoning Ordinance shall be met. If the project site lies within the Braddock-West watershed then the applicant shall provide an additional 10% storage of the pre-development flows in this watershed to meet detention requirements. (T&ES)
- C - 3 Per the requirements of Article 13-113 (d) of the AZO, all stormwater designs that require analysis of pressure hydraulic systems, including but not limited to the design of flow control structures and storm water flow conveyance systems shall be signed and sealed by a professional engineer, registered in the Commonwealth of Virginia. The design of storm sewer shall include the adequate outfall, inlet, and hydraulic grade line (HGL) analyses that shall be completed to the satisfaction of the Director of T&ES. Provide appropriate reference and/or source used to complete these analyses. (T&ES)
- C - 4 Location of customer utility services and installation of transmission, distribution and main lines in the public rights of way by any public service company shall be governed by franchise agreement with the City in accordance with Title 5, Chapter 3, Section 5-3-2 and Section 5-3-3, respectively. The transformers, switch gears, and boxes shall be located outside of the public right of way. (T&ES)

- C - 5 (a) Per the requirements of Section 5-3-2, Article A, Chapter 3 of the City of Alexandria Code, all new customer utility services, extensions of existing customer utility services and existing overhead customer utility services supplied by any existing overhead facilities which are relocated underground shall, after October 15, 1971 be installed below the surface of the ground except otherwise exempted by the City Code and to the satisfaction of the Director, Department of Transportation and Environmental Services.
(b) Per the requirements of Section 5-3-3, Article A, Chapter 3 of the City of Alexandria Code, all new installation or relocation of poles, towers, wires, lines, cables, conduits, pipes, mains, and appurtenances used or intended to be used to transmit or distribute any service such as electric current, telephone, telegraph, cable television, traffic control, fire alarm, police communication, gas, water, steam or petroleum, whether or not on the streets, alleys, or other public places of the City shall, after October 15, 1971, be installed below the surface of the ground or below the surface in the case of bridges and elevated highways except otherwise exempted by the City Code and to the satisfaction of Director, Department of Transportation and Environmental Services. (T&ES)
- C - 6 Flow from downspouts, foundation drains, and sump pumps shall be discharged to the storm sewer per the requirements of Memorandum to the industry on Downspouts, Foundation Drains, and Sump Pumps, Dated June 18, 2004 that is available on the City of Alexandria's web site. The downspouts and sump pump discharges shall be piped to the storm sewer outfall, where applicable after treating for water quality as per the requirements of Article XIII of Alexandria Zoning Ordinance (AZO). (T&ES)
- C - 7 In compliance with the City of Alexandria Zoning Ordinance Article XI, the applicant shall complete a sanitary sewer adequate outfall analysis as per the requirements of Memorandum to Industry No. 02-07 New Sanitary Sewer Connection and Adequate Outfall Analysis dated June 1, 2007. The memorandum is available at the following web address of the City of Alexandria (T&ES)
- [http://alexandriava.gov/uploadedFiles/tes/info/New%20Sanitary%20Sewer%20Connection%20and%20Adequate%20Outfall%20Analysis%20\(02-07\).pdf](http://alexandriava.gov/uploadedFiles/tes/info/New%20Sanitary%20Sewer%20Connection%20and%20Adequate%20Outfall%20Analysis%20(02-07).pdf)
- C - 8 Per the requirements of Title 4, Chapter 2, Article B, Section 4-2-21, Appendix A, Section A 106(6), Figure A 106.1 Minimum Standards for Emergency Vehicle Access: provide a total turning radius of 25 feet to the satisfaction of Directors of T&ES and Office of Building and Fire Code Administration and show turning movements of standard vehicles in the parking lot as per the latest AASHTO vehicular guidelines. (T&ES)
- C - 9 The applicant shall provide storage space for solid waste and recyclable materials containers as outlined in the City's "Solid Waste and Recyclable Materials Storage Space Guidelines", or to the satisfaction of the Director of Transportation & Environmental Services. The plan shall show the turning movements of a trash truck and the trash truck shall not back up to collect trash. The City's storage space guidelines and required

Recycling Implementation Plan forms are available at: www.alexandriava.gov or contact the City's Solid Waste Division at 703-746-4410, or via email at commercialrecycling@alexandriava.gov, for information about completing this form. (T&ES)

- C - 10 The applicant shall be responsible to deliver the solid waste, as defined by the City Charter and Code of the City of Alexandria, to the Covanta Energy Waste Facility located at 5301 Eisenhower Avenue. A note to that effect shall be included on the plan. The developer further agrees to stipulate in any future lease or property sales agreement that all tenants and/or property owners shall also comply with this requirement. (T&ES)
- C - 11 The applicants will be required to submit a Recycling Implementation Plan form to the Solid Waste Division, as outlined in Article H to Title 5 (Ordinance Number 4438), which requires all commercial properties to recycle.
- C - 12 All private streets and alleys shall comply with the City's Minimum Standards for Private Streets and Alleys. (T&ES)
- C - 13 Bond for the public improvements must be posted prior to release of the site plan.* (T&ES)
- C - 14 The sewer tap fee must be paid prior to release of the site plan.* (T&ES)
- C - 15 All easements and/or dedications must be recorded prior to release of the site plan.* (T&ES)
- C - 16 Plans and profiles of utilities and roads in public easements and/or public Right of Way must be approved prior to release of the plan.* (T&ES)
- C - 17 Provide a phased erosion and sediment control plan consistent with grading and construction plan. (T&ES)
- C - 18 Per the Memorandum to Industry, dated July 20, 2005, the applicant is advised regarding a requirement that applicants provide as-built sewer data as part of the final as-built process. Upon consultation with engineering firms, it has been determined that initial site survey work and plans will need to be prepared using Virginia State Plane (North Zone) coordinates based on NAD 83 and NAVD 88. Control points/Benchmarks which were used to establish these coordinates should be referenced on the plans. To insure that this requirement is achieved, the applicant is requested to prepare plans in this format including initial site survey work if necessary. (T&ES)

- C - 19 The thickness of sub-base, base, and wearing course shall be designed using "California Method" as set forth on page 3-76 of the second edition of a book entitled, "Data Book for Civil Engineers, Volume One, Design" written by Elwyn E. Seelye. Values of California Bearing Ratios used in the design shall be determined by field and/or laboratory tests. An alternate pavement section for Emergency Vehicle Easements (EVE) to support H-20 loading designed using California Bearing Ratio (CBR) determined through geotechnical investigation and using Virginia Department of Transportation (VDOT) method (Vaswani Method) and standard material specifications designed to the satisfaction of the Director of Transportation and Environmental Services (T&ES) will be acceptable. (T&ES)
- C - 20 All pedestrian, traffic, and way finding signage shall be provided in accordance with the Manual of Uniform Traffic Control Devices (MUTCD), latest edition to the satisfaction of the Director of T&ES. (T&ES)
- C - 21 No overhangs (decks, bays, columns, post or other obstructions) shall protrude into public Right of Ways, public easements, and pedestrian or vehicular travelways unless otherwise permitted by the City Code. (T&ES)
- C - 22 All driveway entrances, curbing, etc. in the public ROW or abutting public ROW shall meet City design standards. (T&ES)
- C - 23 All sanitary laterals and/or sewers not shown in the easements shall be owned and maintained privately. (T&ES)
- C - 24 The applicant shall comply with the City of Alexandria's Noise Control Code, Title 11, Chapter 5, which sets the maximum permissible noise level as measured at the property line. (T&ES)
- C - 25 The applicant shall comply with the Article XIII of the City of Alexandria Zoning Ordinance, which includes requirements for stormwater pollutant load reduction, treatment of the water quality volume default and stormwater quantity management. (T&ES)
- C - 26 The applicant shall comply with the City of Alexandria, Erosion and Sediment Control Code, Section 5, Chapter 4. (T&ES)
- C - 27 All required permits from Virginia Department of Environmental Quality, Environmental Protection Agency, Army Corps of Engineers, Virginia Marine Resources shall be in place for all project construction and mitigation work prior to release of the final site plan. This includes the state requirement for a VSMP permit for land disturbing activities greater than 2500 SF. * (T&ES)

Virginia American Water Comments:

1. Comply with Virginia American Water's *General Design Requirements* for all new water facilities. The standards can be obtained from VAWC by contacting Hao Chen at Hao.Chen@amwater.com.
2. Developer shall submit a Code Administration approved ISO calculation, in order to verify whether the existing and proposed water mains layout can achieve the Needed Fire Flow.
3. Survey and draw the existing 6" fire service line for 3526 King Street, and indicate whether this fire service line will be re-used or abandoned.
4. Sheet C-6: revise the "Existing Fire Hydrant To Be Relocated" to "Existing Fire Hydrant To Be Removed".
5. Sheet C-6: revise the "Relocated Fire Hydrant" to "Proposed Fire Hydrant".
6. Sheet C-6: annotate the size of the new water main and service lines (domestic & fire).
7. Sheet C-6: indicate whether the existing domestic service lines will be removed or re-used.
8. Sheet C-6: the proposed water line on south of the building shall be installed on paved area, rather than through the Bio-Retention area. Also, this water line, including the fire hydrant, wet tap and valve, will be recorded as a private fire service line, and shall be installed under a VAW "Application for Special Connection" fire service agreement.
9. Survey and draw the existing water mains on Marlee Way, in accordance with the enclosed water service schematic map.
10. Survey and draw the existing hydrant #5091, in accordance with the enclosed water service schematic map.
11. Revise the existing 16" water main annotation to "Existing 16" Lock Joint Water Main".
12. Survey and draw the existing 16" water main from Marlee Way to the east of the property line, in accordance with the enclosed water service schematic map.

ASA Comments

- F - 1. Drawings provide sanitary flow computations and complete layout of proposed sanitary mains.
- C - 1. Ensure all discharges are in accordance with City of Alexandria Code 4035.

- R - 1. The Applicant shall coordinate with City of Alexandria T&ES to ensure that planned flow capacity does not exceed City of Alexandria allotted ASA plant capacity of 20.5 MGD.
- R - 2. The Applicant shall coordinate with City of Alexandria T&ES to ensure in writing to ASA that additional flow planned does not exceed flow capacity in ASA Interceptors & Trunk Sewers during wet & average flow conditions.
- R - 3. Proposed construction and sewer discharge limits from the new facility could be regulated by ASA Pretreatment. Contact ASA Quality Manager at 703-549-3382 ext. 2275.

Code Administration (Building Code)

- F-1 *The following comments are for preliminary review only. Once the applicant has filed for a building permit, code requirements will be based upon the building permit plans. If there are any questions, the applicant may contact Thomas Sciulli, Plan Review Supervisor, at 703.746.4190 or Thomas.sciulli@alexandriava.gov.*
- C-1 New construction must comply with the current edition of the Uniform Statewide Building Code (USBC).
- C-2 The developer shall provide a building code analysis with the following building code data on the plan: a) use group; b) number of stories; c) type of construction; d) floor area per floor; e) fire protection plan.

Police

Landscape Recommendations

- R - 1. The proposed shrubbery should have a natural growth height of no more than 2 ½ to 3 feet with a maximum height of 36 inches when it matures and should not hinder the unobstructed view of patrolling law enforcement vehicles.

Parks

- R - 2. It is recommended that the applicant choose a style bench that has an armrest in the middle of the bench to deter unwanted sleeping and skateboarding on the benches.

Miscellaneous

- R - 3. It is recommended that the buildings have an address number which is contrasting in color to the background, at least 3 inches high, reflective, and visible from the street placed on the front and back of each home. It is strongly suggested that no brass or gold

colored numbers are used. This aids in a timely response from emergency personnel should they be needed.

Health Department

- C-1 An Alexandria Health Department Permit is required for all regulated facilities.
- C-2 Permits are non-transferable.
- C-3 Permits must be obtained prior to operation.
- C-4 Five sets of plans are to be submitted to and approved by this department prior to construction of any facility regulated by the health department.
- C-5 Plans for food facilities must comply with the Alexandria City Code, Title 11, Chapter 2, Food and Food Establishments. There is a \$200.00 fee for review of plans for food facilities.
- C-6 Pool plans must comply with Title 11, Chapter 11, Swimming Pools. Tourist establishment pools must have six (6) sets of plans submitted.
- C-7 Personal grooming facilities must comply with Title 11, Chapter 7, Personal Grooming Establishments.
- C-8 Tanning Salons must meet State Code Title 59.1, Chapter 24.1, Tanning Facilities.
- C-9 Massage facility plans must comply with Title 11, Chapter 4.2, Massage Regulations. All massage therapists must possess a current massage therapist certification, issued by the Commonwealth of Virginia in accordance with the Code of Virginia Chapter 599, § 54.1-3029 and must possess an Alexandria Massage permit in accordance with Alexandria City Code Title 11, Chapter 4.2 prior to engaging in any massage activity.
- C-10 Coin-operated dry cleaning facility plans must comply with Title 9, Chapter 4, Coin operated Dry Cleaning Establishments.
- C-11 Coin-operated laundry plans must comply with Title 9, Chapter 5, Coin Operated Laundries.
- C-12 Hotels/Motels must comply with State Code 35.1, Hotels, Restaurants, Summer Camps, and Campgrounds.
- C-13 Food must be protected to the point of service at any outdoor dining facility.
- R-1 Provide a menu or list of foods to be handled at this facility to the Health Department prior to opening.

Archaeology

- F - 1. This property may have been part of the 60-acre country estate of George Slacum, who died in 1810. In *Lost Heritage: Early Homes that Have Disappeared from Northern Virginia*, Ruth Lincoln Kaye reported that the estate house was located in the current Bradley Shopping Center area just west of this development lot. In addition, the property is at the intersection of two important historical roads. A Documentary Study is recommended to find out more information about this major crossroads area and to assess archaeological potential, perhaps relating to the early estate or to later activities.
- F - 2. If this project is a federal undertaking or involves the use of any federal funding, the applicant shall comply with federal preservation laws, in particular Section 106 of the National Historic Preservation Act of 1966. The applicant will coordinate with the Virginia Department of Historic Resources and the federal agency involved in the project, as well as with Alexandria Archaeology.
- C - 1 All required archaeological preservation measures shall be completed in compliance with Section 11-411 of the Zoning Ordinance.

Asterisks denote the following:

- * Condition must be fulfilled prior to release of the final site plan
- ** Condition must be fulfilled prior to release of the building permit
- *** Condition must be fulfilled prior to release of the certificate of occupancy
- **** Condition must be fulfilled prior to release of the bond

ATTACHMENT #1

**Transportation Management Plan
3526 King Street Grocery SUP #2011-00060**

The Transportation Management Plan (TMP) program was enacted by the Alexandria City Council on May 16, 1987 and is now part of the Alexandria Zoning Code (Article XI, Division B, Section 11-700). The ordinance requires that office, retail, residential and industrial projects which achieve certain square footage thresholds submit a special use permit application which must include a traffic impact analysis and a transportation management plan (TMP). The Planning Commission and the City Council consider all special use permit applications, and the City Council makes the final decision on the approval of the applications. Any project requiring a TMP must receive the TMP special use permit before the project can proceed. The TMP Program is a comprehensive effort to increase the use of transit and reduce the number of single occupant vehicles (SOVs) in the City.

The Transportation Management Program for the grocery store at 3526 King Street consists of six parts:

- 1) Goal and Evaluation of the TMP
- 2) Organization, Funding and Reporting
- 3) Transportation Management Plan Directives
- 4) Evaluation of the Effectiveness of the TMP
- 5) District Transit Management Program
- 6) Permanence of the TMP Ordinance

1. Goal and Evaluation of the TMP

- a. The 3526 King Street grocery store site is located at the intersection of King Street, Braddock Road and Quaker Lane. Several DASH and Metro bus lines servicing the site provide connection to the King Street Metro Station. The TMP goals are established as 35% non-SOV for employees during peak hours.
- b. The achievement of this goal will be demonstrated by the activities conducted and financed by the TMP fund and the annual survey that are requirements of this special use permit. The fund report should demonstrate that enough activities are being conducted to persuade employees to switch to transit or carpool as opposed to driving alone. The survey should progressively show that the strategies financed through the TMP fund are decreasing the number of peak hour single occupant vehicles to the site to achieve or exceed the goal. The annual report, fund report and survey are covered under Section 2.

2. TMP Organization, Funding and Reporting

- a. The developer shall designate a Transportation Management Plan Coordinator (the TMP Coordinator) to manage and implement the TMP on behalf of the owners of the project. The Transportation Planning Division may assist the TMP Coordinator.

- b. An Annual Report shall be submitted by the TMP Coordinator and approved by the Transportation Planning Division. This report will be due on July 15 of every year. The Annual Report shall include an assessment of the effects of TMP activities on carpooling, vanpooling, transit ridership and peak hour traffic, and a work program for the following year. The initial report shall be submitted one year from the issuance of the Certificate of Occupancy.
- c. The TMP Coordinator shall provide Semi-annual TMP Fund Reports to the Transportation Planning Division. These reports will provide a summary of the contributions to the fund and all expenses and should be accompanied by supporting documentation. The first report will be due six months following the issuance of the first certificate of occupancy, with the following due on January 15 and July 15 of every year.
- d. The TMP Coordinator shall distribute an annual survey to all employees. The survey will be supplied by the Transportation Planning Division. Survey results will be due on July 15 of every year. A 50% response rate is required as approved by the Transportation Planning Division.

3. Transportation Management Plan Directives

- a. The Special Use Permit application has been made for the following uses:

| Land Use | Square Footage |
|---------------------|-----------------------|
| Grocery | 61,000 |
| Other Retail | 3,100 |

- b. According to the guidelines of Zoning Ordinance Chapter 11-700, the above level of development requires a Transportation Management Program (TMP). Such plan shall include the following elements:
 - i. A TMP Coordinator shall be designated for the project upon application for the initial building permit. The name, address, email and telephone number of the coordinator will be provided to the City at that time, as well as of any changes occurring subsequently. This person will be responsible for implementing and managing all aspects of the TMP and the parking management program for the project.
 - ii. Transit, ridesharing, staggered work hours/compressed workweeks, parking restrictions and the other program elements shall be promoted to employees.

- iii. Information about transit, ridesharing, and other TMP elements shall be distributed and displayed— including transit schedules, rideshare applications and information, incentive information, parking information, etc. This information shall be kept current. Displays of these brochures and applications shall be placed in a prominent location in the building and a website with this information and appropriate links to transit providers will be provided and maintained.
 - iv. A ridesharing program shall be established that includes not only participation in the regional Metropolitan Washington Council of Governments Commuter Connections Program, but also site-specific matching efforts.
 - v. Establish and promote a Guaranteed Ride Home Program as part of the ridesharing and transit marketing efforts.
 - vi. Discounted bus and rail fare media shall be sold on-site to employees of the project. The fare media to be sold will include, at a minimum, fare media for Metrorail, Metrobus, DASH and any other public transportation system fare media requested by employee and/or the Transportation Planning Division. The availability of this fare media will be prominently advertised. At a minimum, the initial discount will be 20%.
- c. **TMP Fund** — The applicant shall create a TMP fund to achieve the reduction goal of 35% of single occupant vehicles for employees, based on the project's size and the benefits to be offered to participating employees. The annual contribution rate for this fund shall be \$.25 per occupied square foot of retail space. This reduction goal may be revised in the future based on City-wide TMP policies or legislation. The annual TMP rate shall increase by an amount equal to the rate of inflation (Consumer Price Index – CPI of the United States) for the previous year. The increase shall begin one year after the initial CO is issued. Payments shall be the responsibility of the developer until this responsibility is transferred by lease or other legal arrangement. The TMP fund shall be used exclusively for these approved activities:
- i. Discounting the cost of bus and transit fare media for on-site employees.
 - ii. Ridesharing incentive programs which may include activities to encourage and assist the formation of car, van and bus pools, such as subsidies or preferential parking charges and parking space location, and other analogous incentive programs.
 - iii. Marketing activities, including advertising, promotional events, etc.
 - iv. Bicycle and pedestrian incentive measures which may include the provision of bicycle parking, bike sharing station and/or storage facilities, the construction and extension of bicycle paths and pedestrian walkways, the provision of shower and locker facilities and similar incentive features
 - v. Operating costs for adjacent bikeshare station.
 - vi. Membership and application fees for carshare vehicles.
 - vii. Any other TMP activities as may be proposed by the TMP Coordinator and approved by the Director of T&ES as meeting goals similar to those targeted by the required TMP measures.

Unencumbered Funds: As determined by the Director of T&ES, any unencumbered funds remaining in the TMP account at the end of each reporting year may be either reprogrammed for TMP activities during the ensuing year or paid to the City for use in walk, bike, transit and/or ridesharing programs and activities.

4. Evaluation of the Effectiveness of the TMP

- a. The goals for transit mode share and auto occupancy established in paragraph 1.a of this document, will be used in evaluating the performance and effectiveness of the TMP. The annual survey will be used to continually determine whether the development is meeting these targets.
- b. The City of Alexandria, in conjunction with the TMP Coordinator, will identify performance standards and objectives to measure the cost effectiveness and develop methodologies to monitor the performance of each element of the TMP. The performance of the development in meeting these objectives will be evaluated in the annual report prepared by the TMP Coordinator, and will be used in developing the work plan for the association.
- c. This TMP has been designed to be flexible and responsive to the inputs of these annual evaluations in prescribing Transportation Demand Management (TDM) and Transportation Supply Management (TSM) strategies and tactics to be implemented in the Annual Work Program. By linking evaluation to work planning, the TMP standards of performance could change throughout the development cycle as the "right" solutions are adjusted in response and anticipation of changes in transportation conditions.

5. District Transit Management Program

The grocery store should integrate with a larger district level TMP program when or if one is organized. All TMP holders in the established area will be part of this District. The objective of this district is to make optimum use of transportation resources for the benefit of residents and employees through economies of scale. The District will be established in coordination with the revised TMP program.

6. Permanence of the TMP Ordinance

- a. As required by Section 11-700 under Article XI of the City of Alexandria Zoning Ordinance, the special use permit and conditions attached thereto as granted by City Council, unless revoked or amended, shall run with the land and shall be mandatory and binding upon the applicant, all owners of the land and all occupants and upon all heirs, successors and assigns with whom sale or lease agreements are executed subsequent to the date of this approval.
- b. Prior to any lease/purchase agreements, the applicant shall prepare appropriate language to inform tenants/owners of the transportation management plan special use permit and conditions therein, as part of its leasing/purchasing agreements; such language to be reviewed and approved by the City Attorney's office.

- c. The applicant shall participate in the revised Transportation Management Program if established. The revised program will include the elements outlined in the December 8, 2010 docket memo to City Council and approved by the Council. The revision to the program includes a periodic review of the TMP to determine if goals are being met and will provide an opportunity to adjust the rates up or down up to a percentage cap. The revised TMP program will go before the City Council for approval. Participation in the program will not initially increase the base contribution established in this SUP, however, the base contribution would be subject to adjustment up or down, up to a percentage cap, based on the final revised TMP program language to be approved by City Council at a future date.
- d. The Director of T&ES may approve modifications to agreed TMP activities, provided that any changes are consistent with the goals of the TMP.
- e. An administrative fee shall be assessed to the governing entity for lack of timely compliance with the submission of the TMP mandatory reports required in the attachment (fund reports with supporting documentation, annual reports, survey results with a minimum response rate of 50%, and submission of raw data). The fee shall be in the amount of five hundred (\$500.00) for the first 30 (thirty) days late and two hundred and fifty dollars (\$250.00) for every subsequent month late. The amount of these administrative fees is for the base year in which the TMP is approved and shall increase according to the Consumer Price Index (CPI) going forward.

**PROPOSED DEVELOPMENT CONDITION
RZ 2011-0002**

Pursuant to the provision of §11-804 of the Alexandria Zoning Ordinance, 1992, as amended (the "Ordinance"), Safeway Inc., a Delaware corporation ("Safeway"), the owner of the property known as 3526 King Street, Alexandria, Virginia 22304, also known as City of Alexandria Tax Parcel Map 32.01 Block 01 Lot 04 (the "Property") and the applicant requesting the rezoning of the Property from the CG/Commercial General zone classification to the OC/Office Commercial zone classification does hereby proffer in writing the provision of reasonable conditions to be applied to and be part of the rezoning.

Safeway voluntarily and in writing prior the scheduled public hearing proffers:

1. The use of the free standing building shown on the development site plan filed as a part of DSUP 2011-0015 (the "Plan") containing approximately 123,000 gross square feet of space (the "Grocery Store") shall be a retail shopping establishment pursuant to §4-803(AA.1) of the Ordinance limited to a grocery store consisting of approximately 61,000 gross square of retail shopping area located on the second floor of the Grocery Store, and approximately 61,000 gross square feet of accessory space to the Grocery Store and above grade structured parking on the ground level.
2. The uses permitted for the free standing building shown on the Plan containing approximately 3,100 gross square feet of space shall be limited to the uses set forth in §4-802 and §4-803 of the Ordinance, except as such uses are limited by the conditions of DSUP 2011-0015.
3. The redevelopment of the Property shall be in substantial conformance with the improvements depicted in DSUP 2011-0015 as approved by the Alexandria City Council, and as shown on the final site plan approved by the City of Alexandria.
4. These proffers are submitted in accord with §11-804 of the Ordinance and shall be governed and construed in accordance with §11-804 of the Ordinance.
5. Timothy W. Baker, Vice President of Real Estate Eastern Division represents that he is authorized to execute and deliver this Proffer and this Proffer is voluntarily entered into by Safeway.


These proffers are the only proffers on this zoning map amendment. In the event the rezoning is not approved and associated approvals MPA 2011-0007, DSUP 2011-0015 and TMP SUP 2011-0060, these proffers shall be of no binding effect.

SAFEWAY INC.,
a Delaware corporation

By: Timothy W. Baker


Timothy W. Baker
Vice President of Real Estate Eastern Division
October 20, 2011

ATTACHMENT #3 – Map Adjustments to Small Area Plan

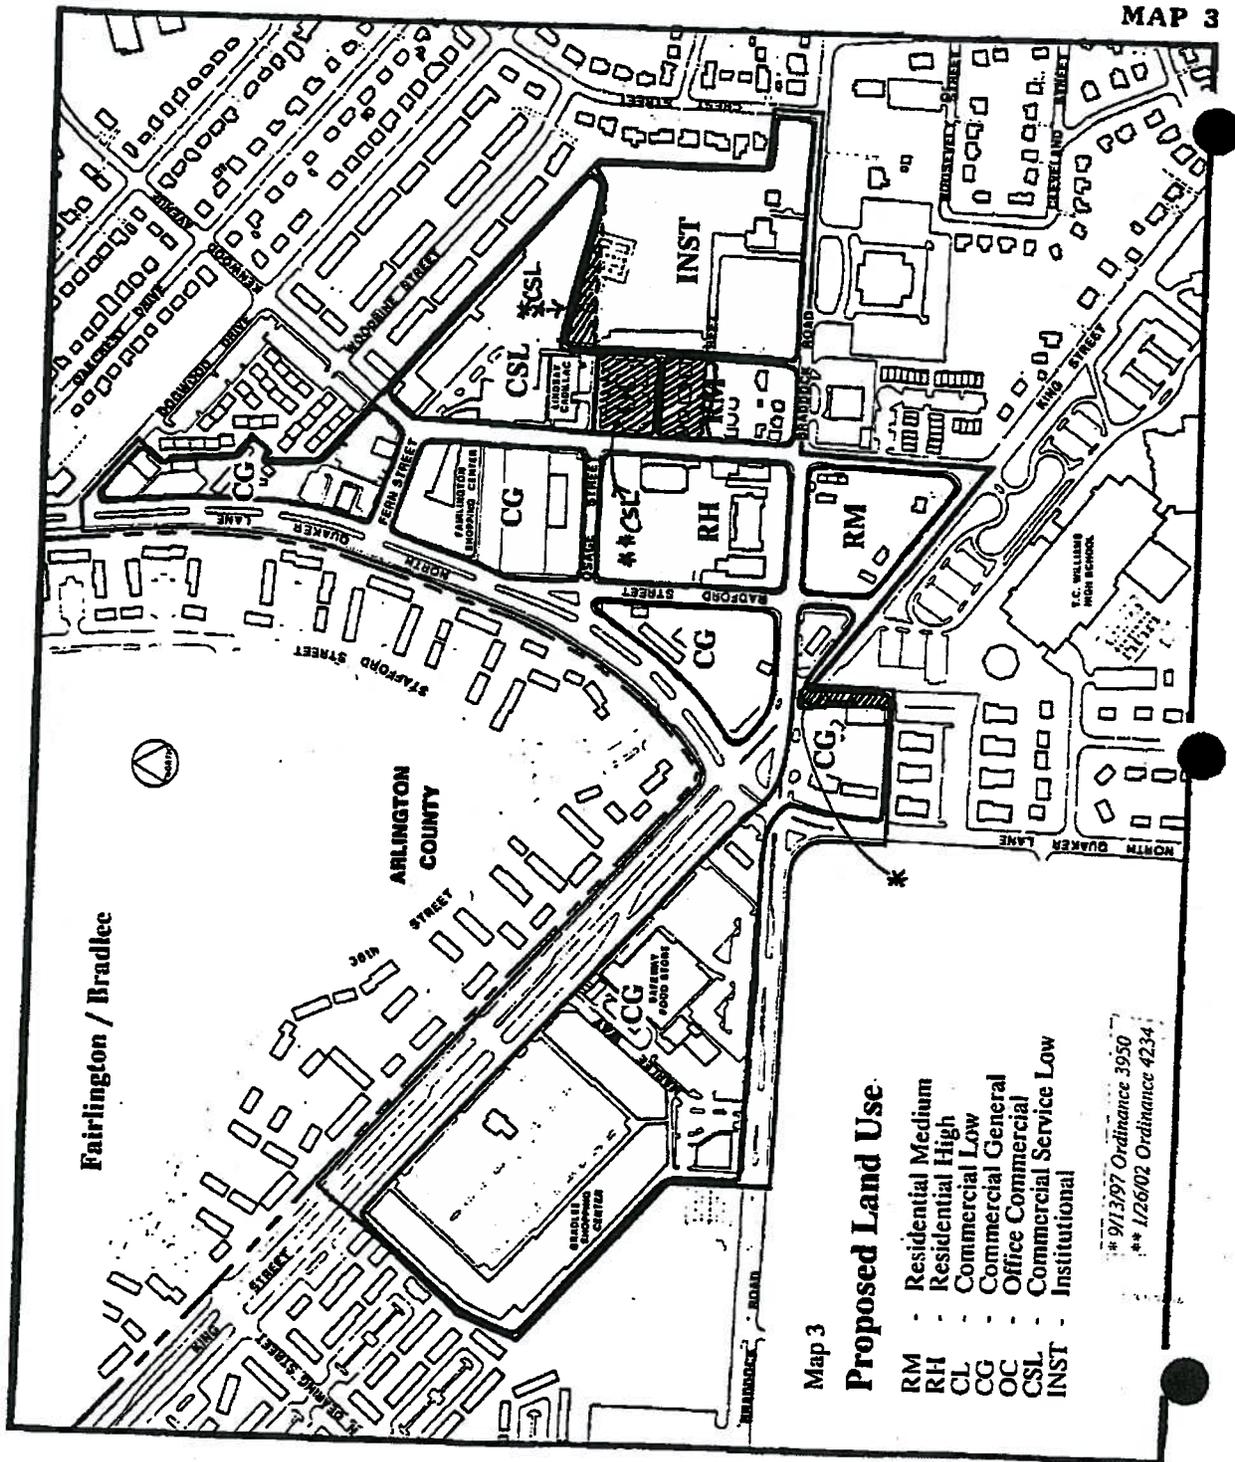


Existing Map 3 in Fairlington/Bradlee Small Area Plan

MAP 3

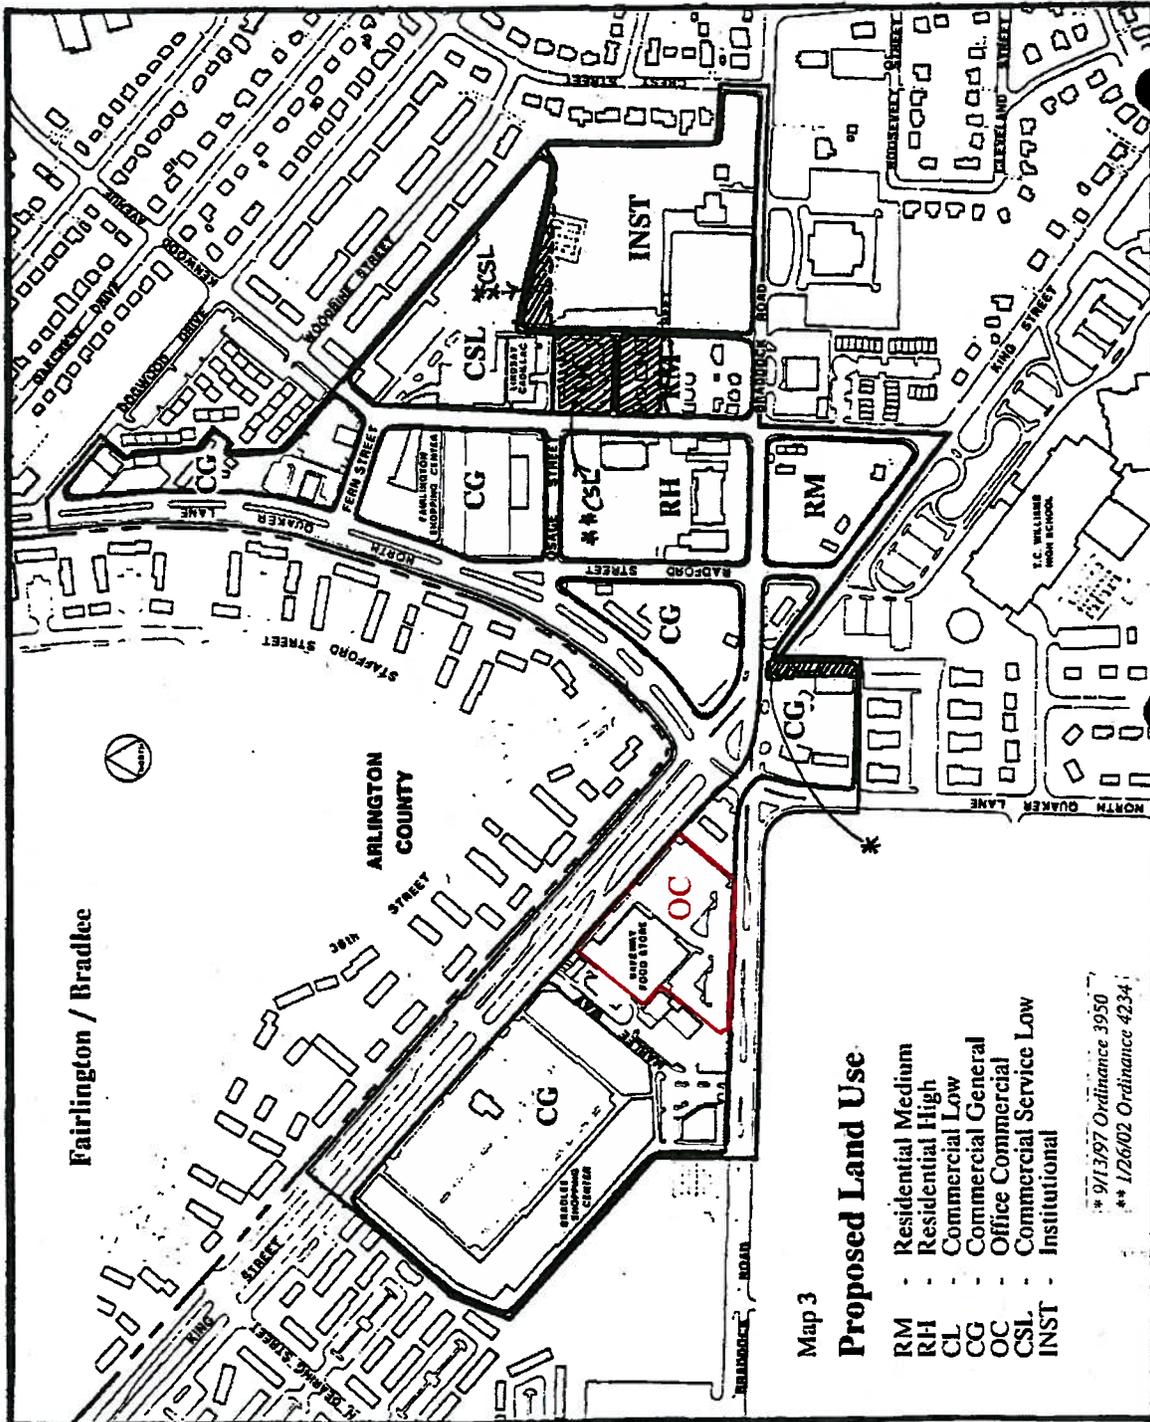


Proposed Map 3 for Fairlington/Bradlee Small Area Plan

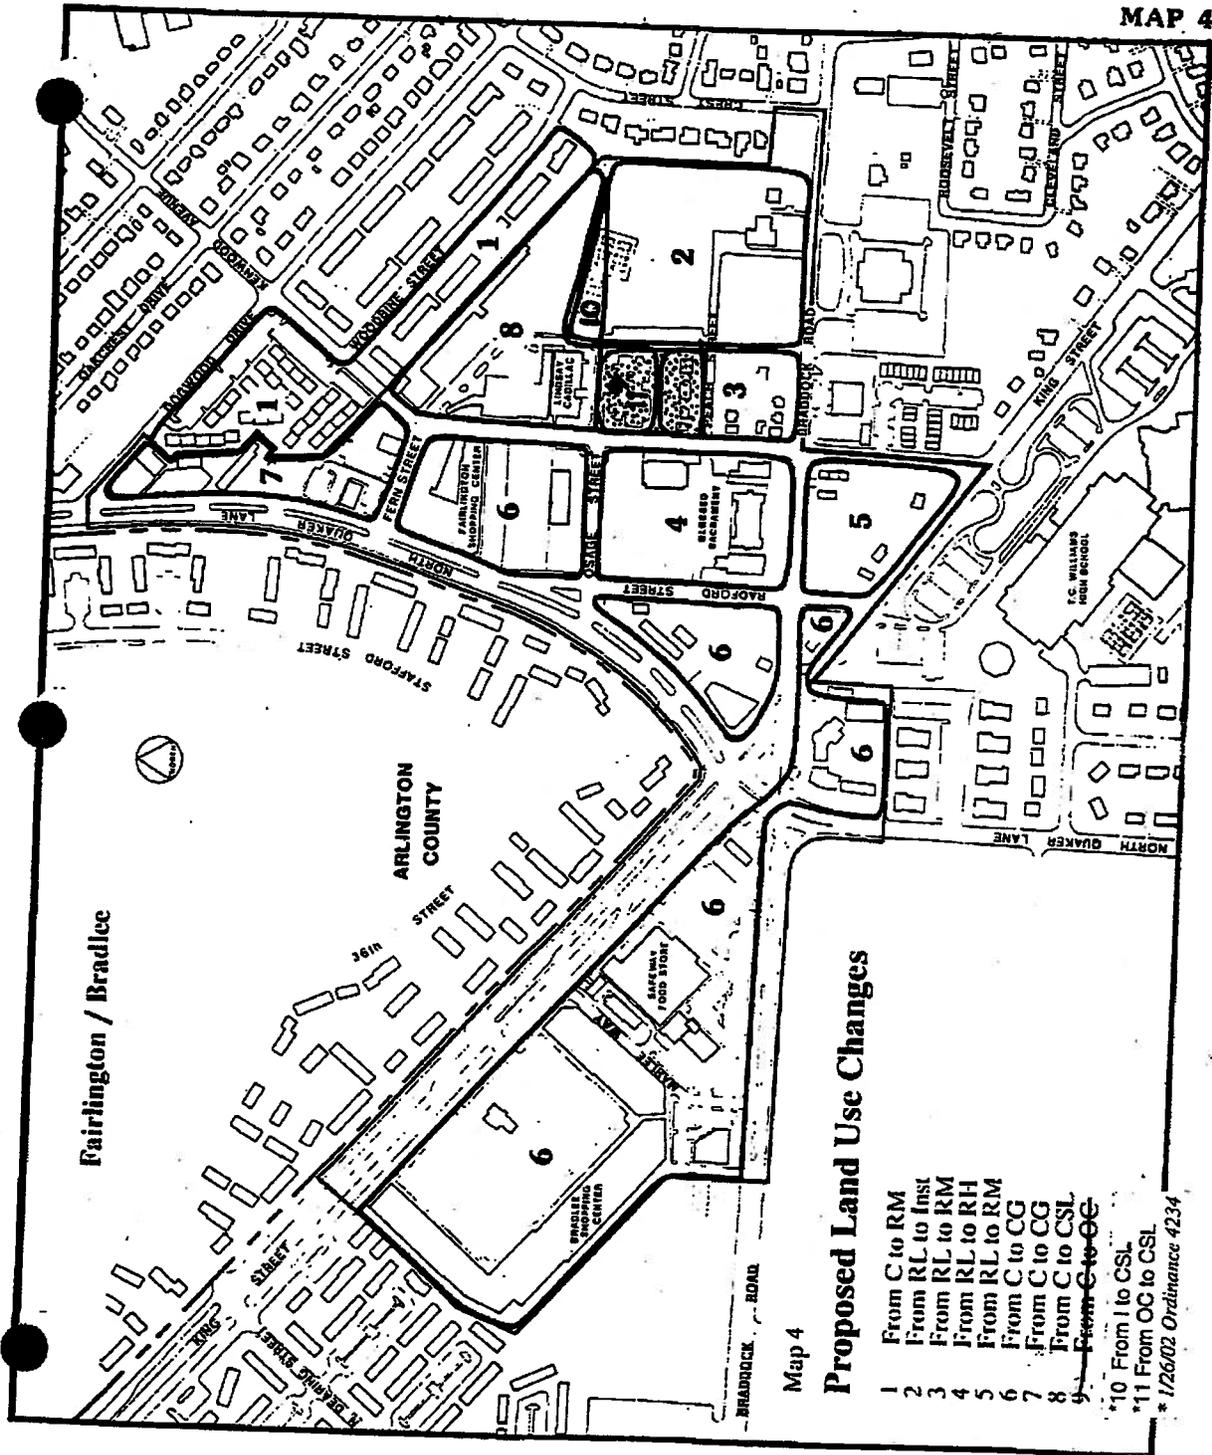

Existing Map 4 of Fairlington/Bradlee Small Area Plan

MAP 4

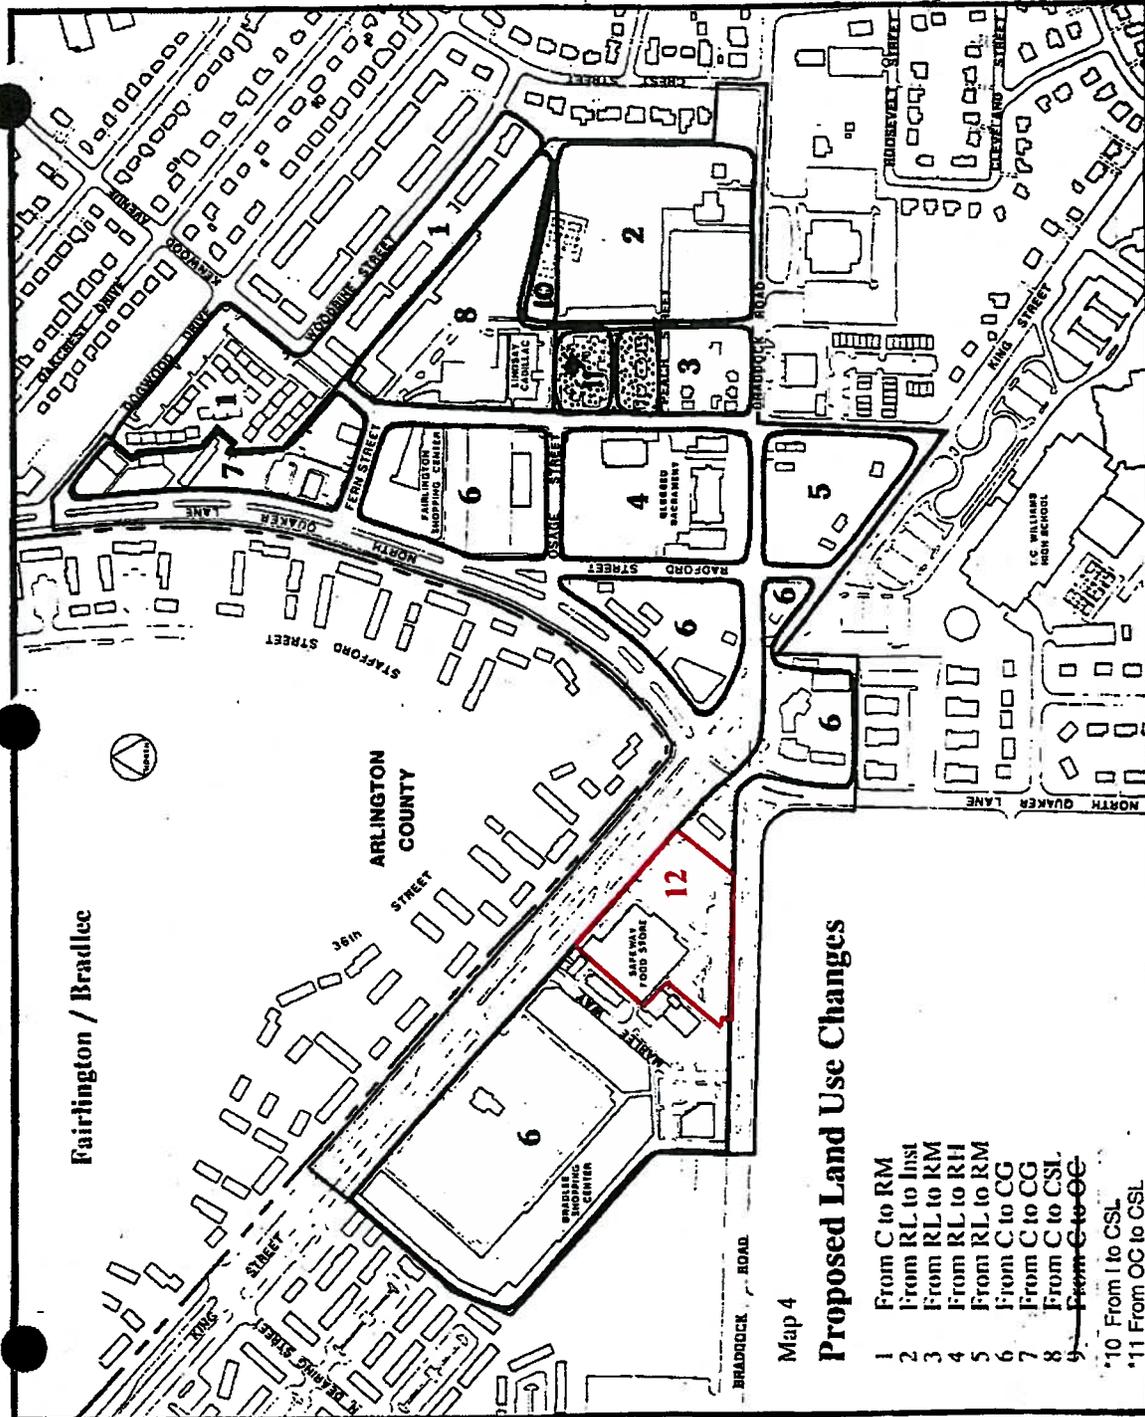


Map 4

Proposed Land Use Changes


- 1 From C to RM
- 2 From RL to Insl
- 3 From RL to RM
- 4 From RL to RH
- 5 From RL to RM
- 6 From C to CG
- 7 From C to CG
- 8 From C to CSL
- 9 From C to CG

*10 From I to CSL
 *11 From OC to CSL
 * 1/26/02 Ordinance 4234
 *12 From CG to OC

7
 Proposed Map 4 of Fairlington/Bradlee Small Area Plan

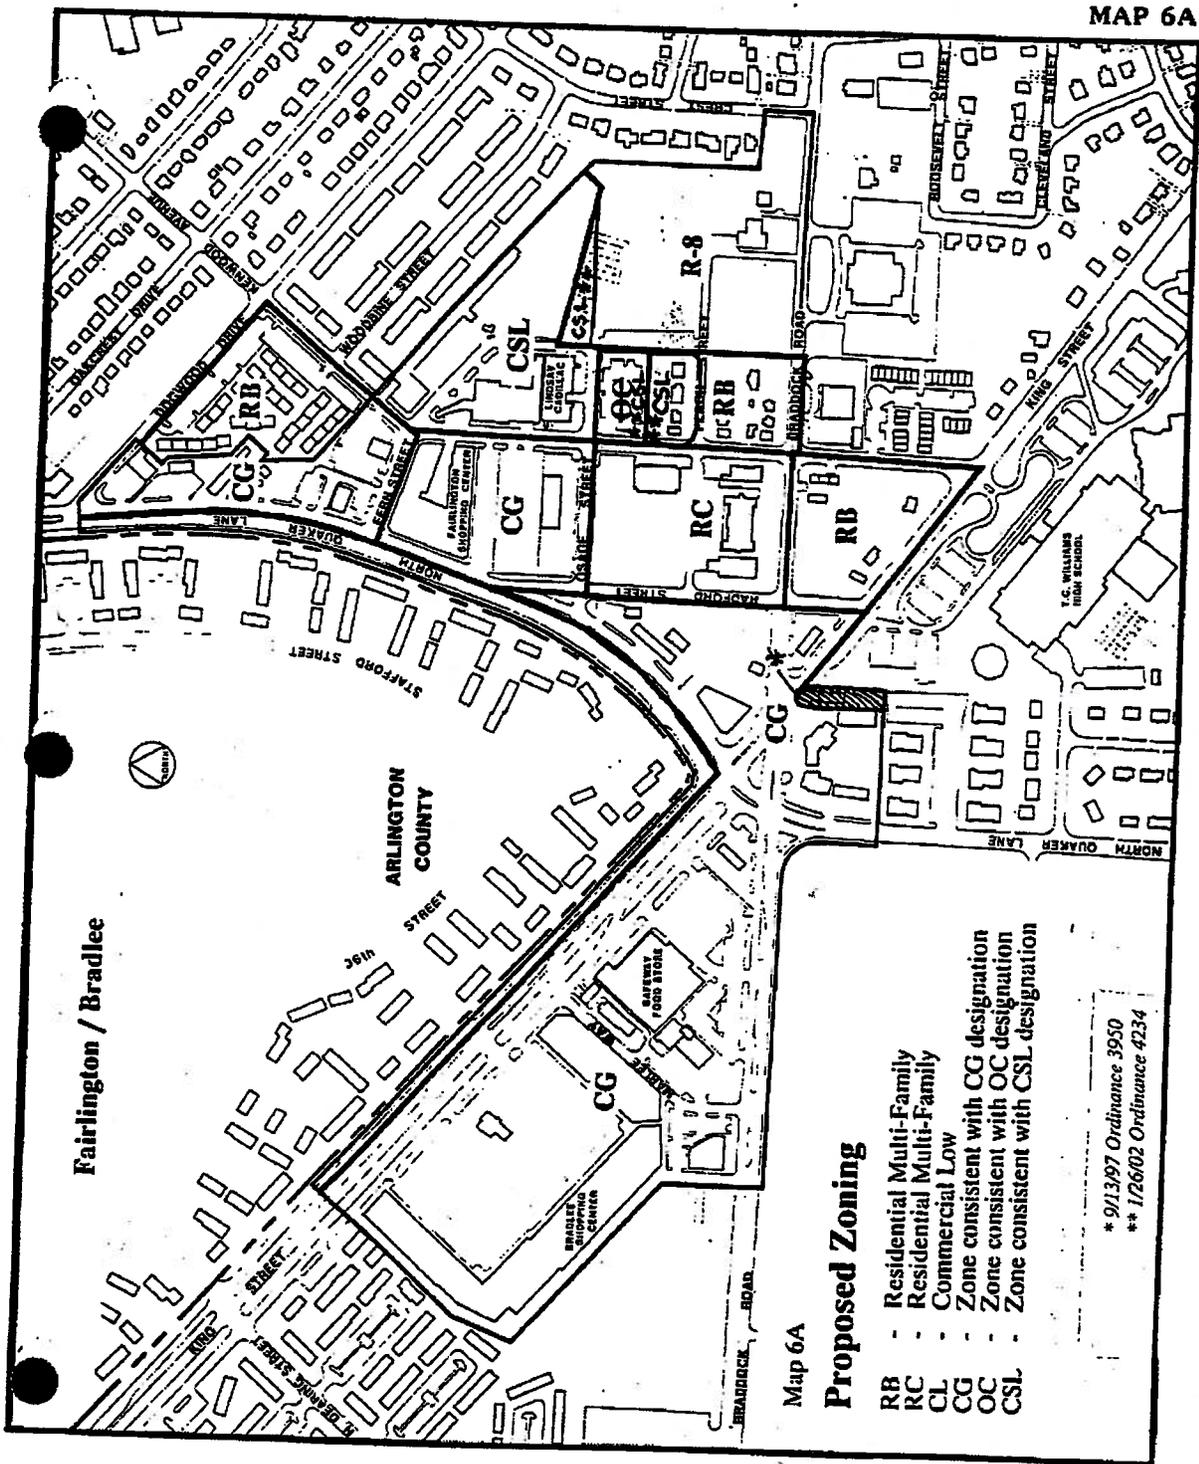

MAP 6A

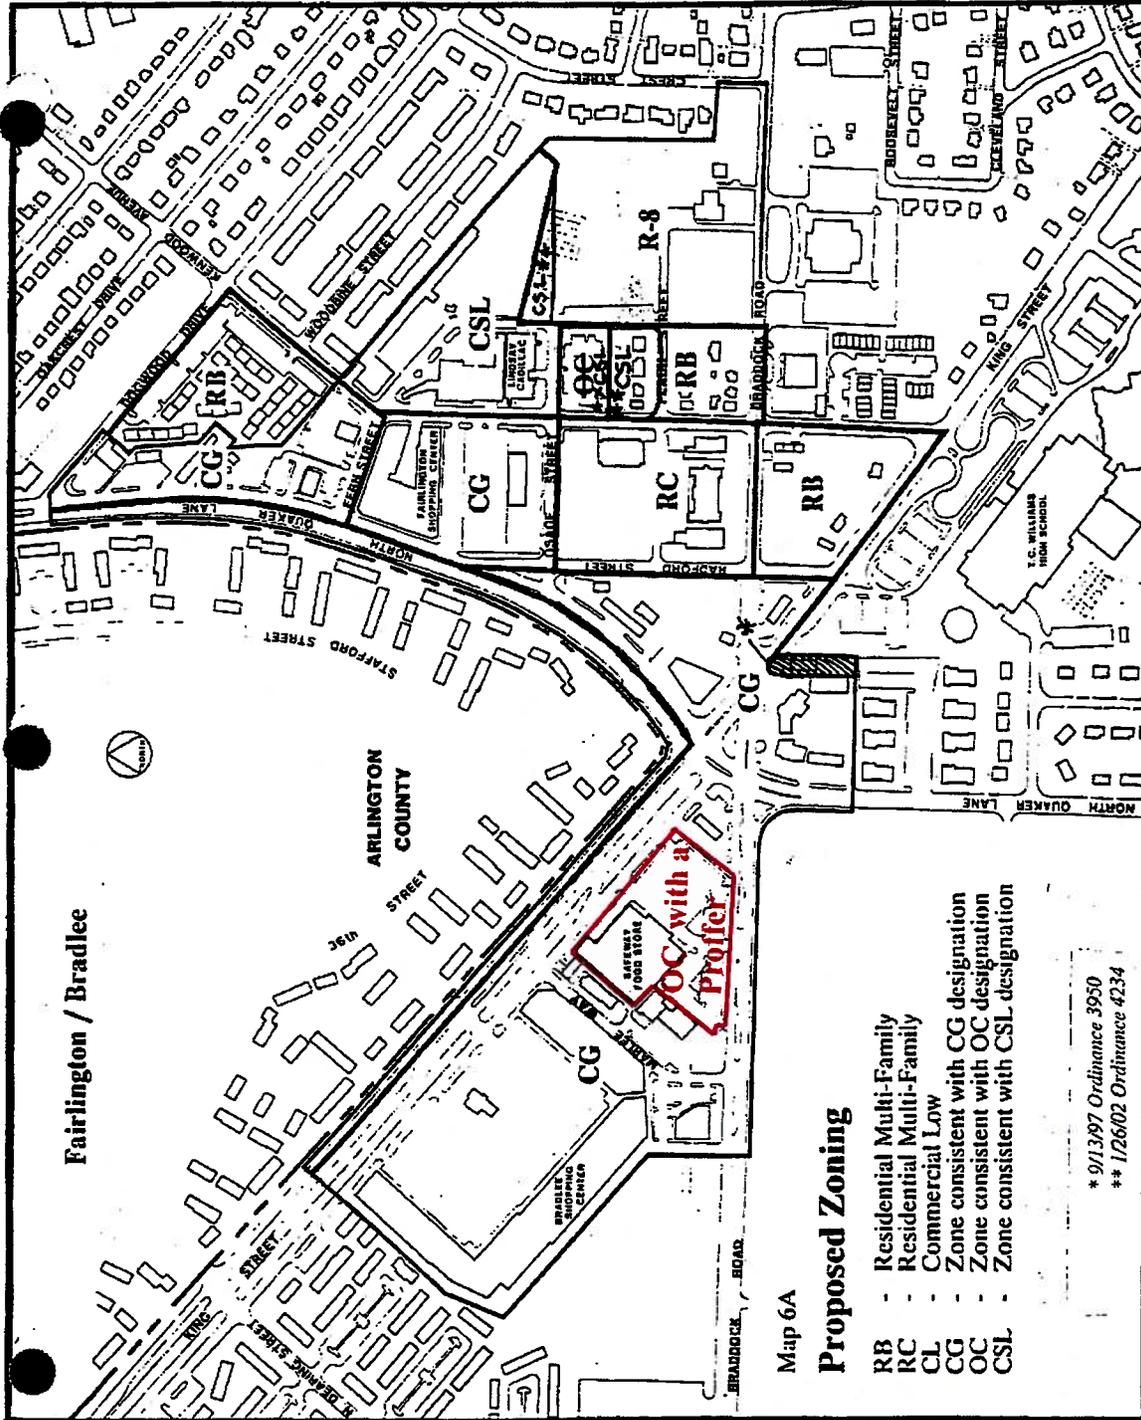


Map 6A

Proposed Zoning

- RB - Residential Multi-Family
- RC - Residential Multi-Family
- CL - Commercial Low
- CG - Zone consistent with CG designation
- OC - Zone consistent with OC designation
- CSL - Zone consistent with CSL designation


* 9/13/97 Ordinance 3950
 ** 1/26/02 Ordinance 4234

Proposed Map 6A of Fairlington/Bradlee Small Area Plan

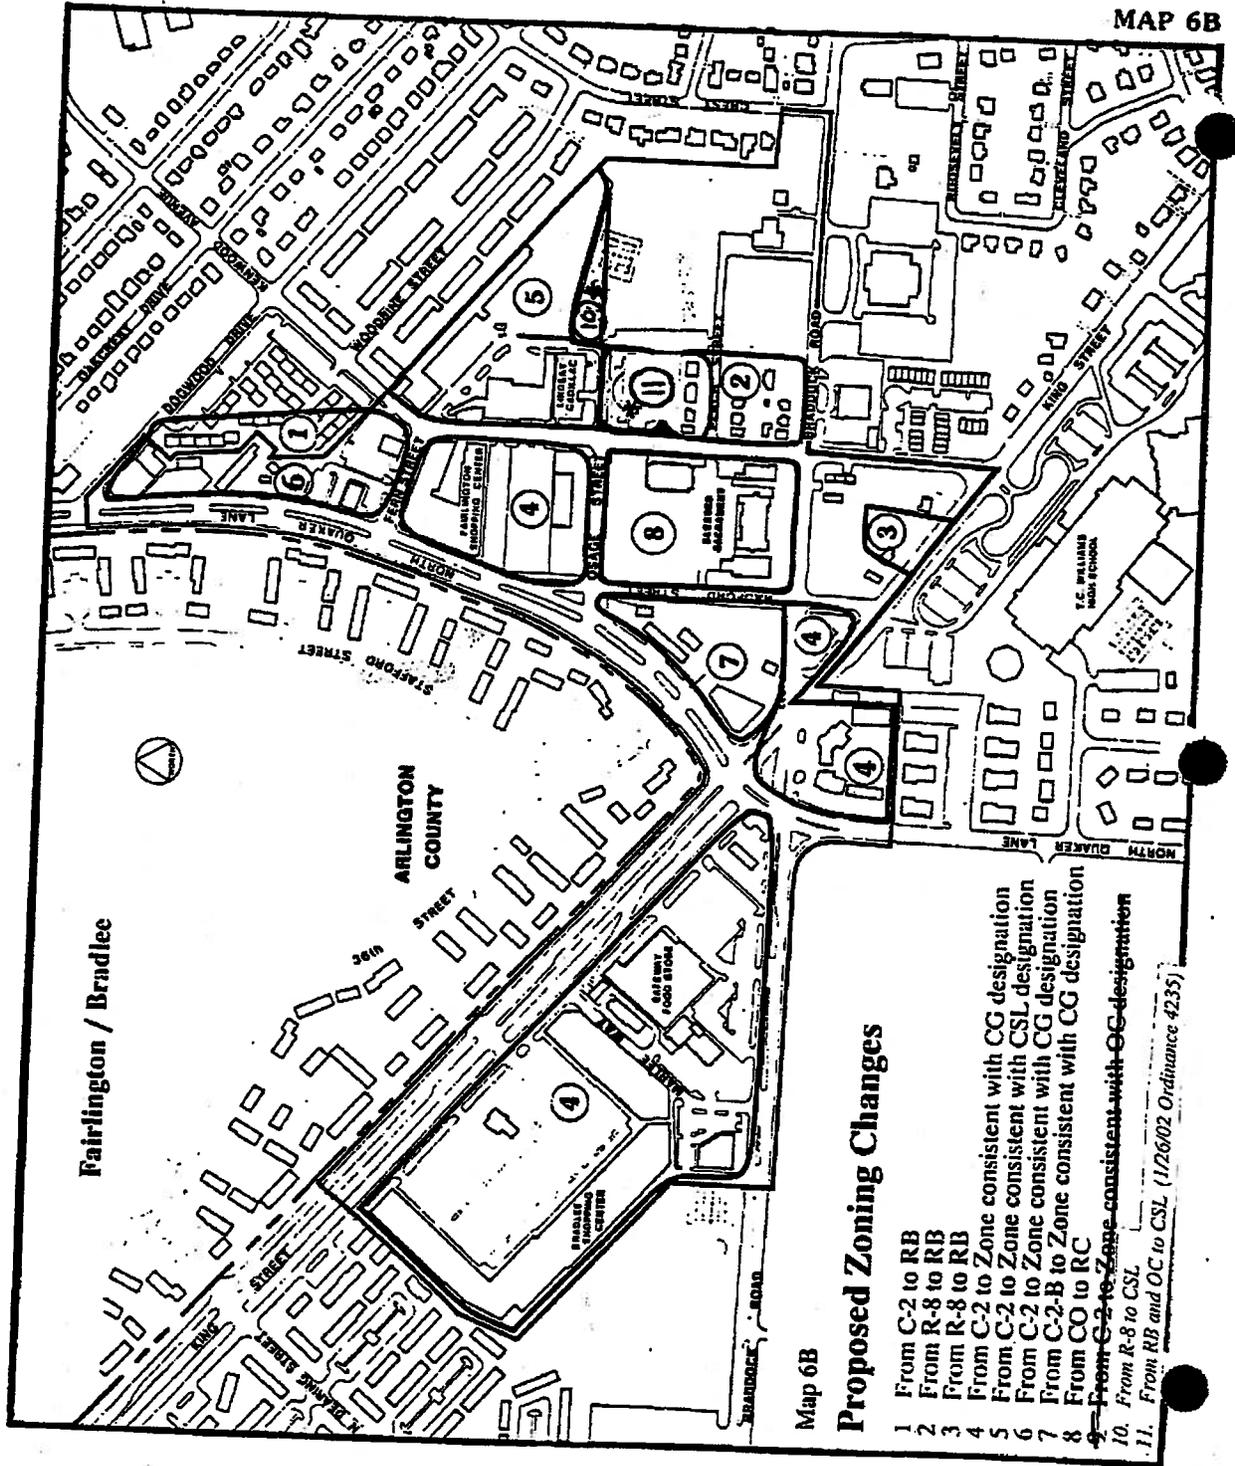

Existing Map 6B of Fairlington/Bradlee Small Area Plan

MAP 6B

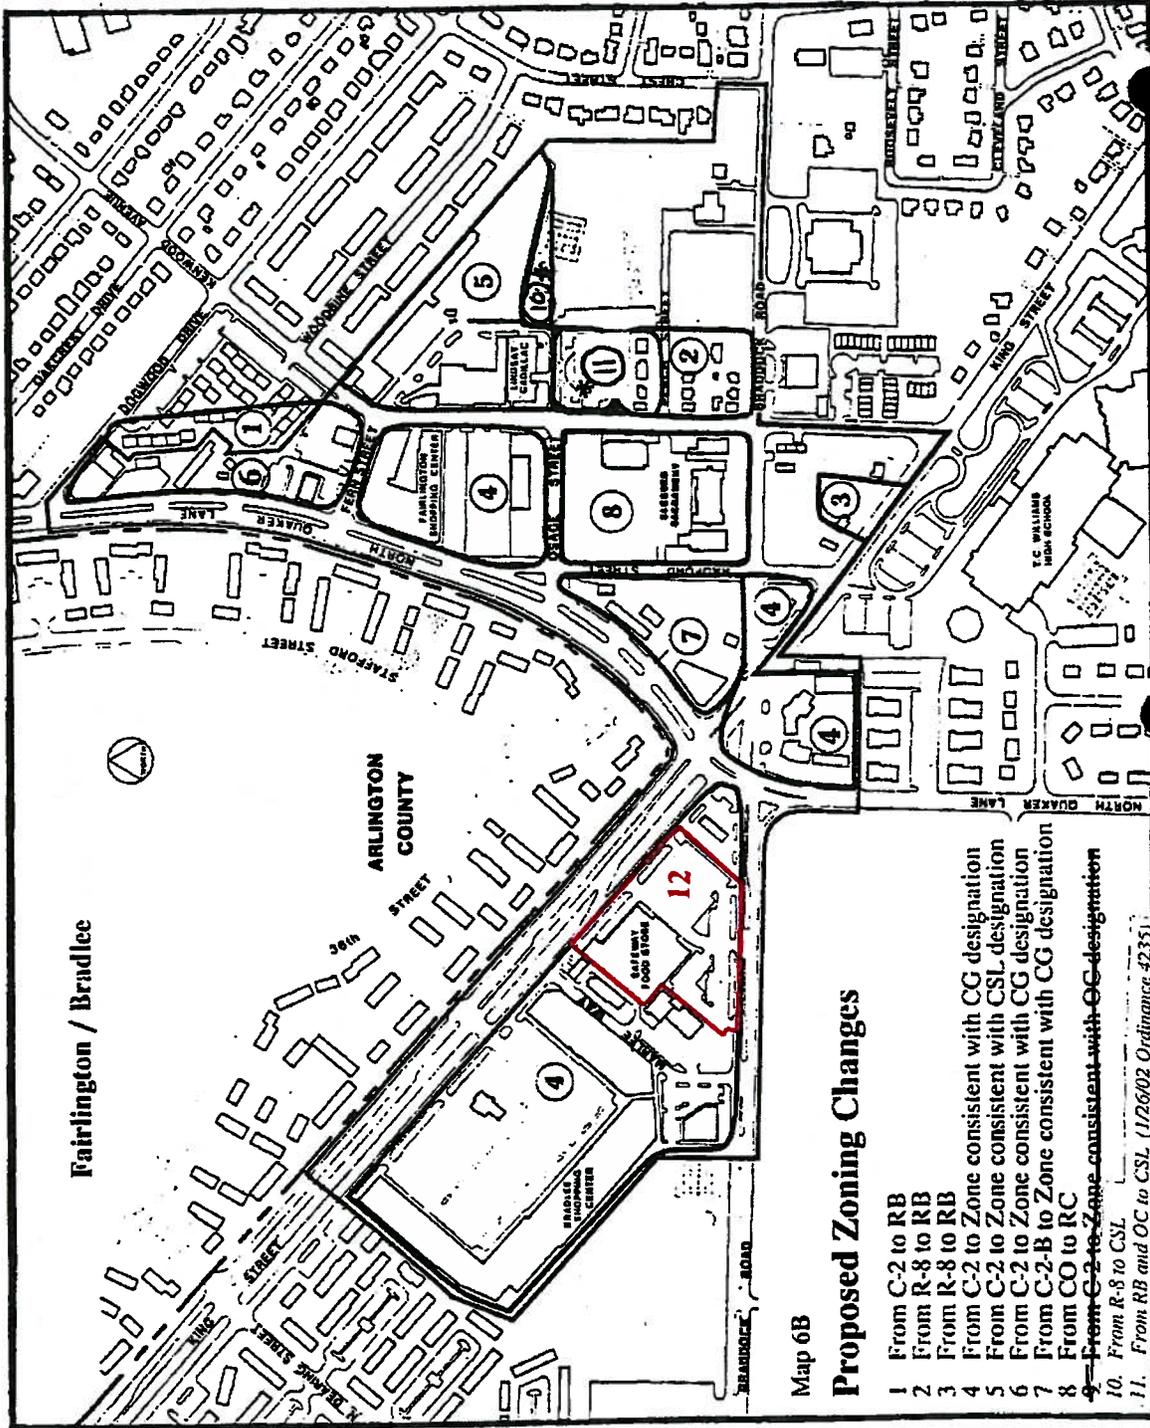

ATTACHMENT #4

RESOLUTION NO. MPA 2011-0007

WHEREAS, under the provisions of Section 9.05 of the City Charter, the Planning Commission may adopt amendments to the Master Plan of the City of Alexandria and submit to the City Council such revisions in said plans as changing conditions may make necessary; and

WHEREAS, an application for amendment to the Fairlington/Bradlee Small Area Plan section of the 1992 Master Plan was filed with the Department of Planning and Zoning on September 14, 2011 for changes in the land use designations to the parcels located at 3526 King Street; and

WHEREAS, the Department of Planning and Zoning has analyzed the proposed revision and presented its recommendations to the Planning Commission; and

WHEREAS, a duly advertised public hearing on the proposed amendment was held on November 1, 2011 with all public testimony and written comment considered; and

WHEREAS, the Planning Commission finds that:

1. The proposed amendment is in keeping with the character of the Fairlington/Bradlee Small Area Plan;
2. The proposed amendment is generally consistent with Planning Commission's long-range recommendations for the general development of the Fairlington/Bradlee Small Area Plan.
3. A proffered rezoning has been submitted which will limit the use of the site to retail, including grocery store, and will require that the property comply with the plan to be approved with DSUP#2011-15.
4. The proposed amendment will provide for neighborhood-serving commercial uses which are compatible with nearby residential neighborhoods.

Based on the foregoing findings and all other facts and circumstances of which the Planning Commission may properly take notice in making and adopting a master plan for the City of Alexandria, adoption of the amendment to the Fairlington/Bradlee Small Area Plan section of the 1992 Master Plan will, in accordance with present and probable future needs and resources, best promote the health, safety, morals, order, convenience, prosperity and general welfare of the residents of the City.

RESOLUTION NO. MPA 2011-0002

NOW, THEREFORE, BE IT RESOLVED by the Planning Commission of the City of Alexandria that:

1. The following amendment is hereby adopted in its entirety as an amendment to the Fairlington/Bradlee Small Area Plan section of the 1992 Master Plan of the City of Alexandria, Virginia in accordance with Section 9.05 of the Charter of the City of Alexandria, Virginia:

Change the land use designation of parcels located at 3526 King Street from Commercial General to Office Commercial.

Change each land use map designating the parcels located at 3526 King Street as Commercial General to Office Commercial.

Change each zoning map designating the parcels located at 3526 King Street as Commercial General to Office Commercial with a proffer.

2. This resolution shall be signed by the Chairman of the Planning Commission and attested by its secretary, and a true copy of this resolution forwarded and certified to the City Council.

ADOPTED the First Day of November 2011.

John Komoroske, Chairman

ATTEST:

Faroll Hamer, Secretary

PRELIMINARY
REVIEW

REVISED
9/14/2011

MPA # 2011-0007
REZ# 2011-0002



APPLICATION

Master Plan Amendment MPA# _____

Zoning Map Amendment REZ# _____

PROPERTY LOCATION: 3526 King Street (032.01-01-04 and 3915-03-01-01)

APPLICANT

Name: Safeway Inc., a Delaware Corporation

Address: 4551 Forbes Boulevard, Lanham, Maryland 20706

PROPERTY OWNER:

Name: Safeway Inc., a Delaware Corporation

Address: 4551 Forbes Boulevard, Lanham, Maryland 20706

Interest in property:

- Owner Contract Purchaser
- Developer Lessee Other _____

If property owner or applicant is being represented by an authorized agent such as an attorney, a realtor, or other person for which there is some form of compensation, does this agent or the business in which they are employed have a business license to operate in Alexandria, VA:

- yes: If yes, provide proof of current City business license.
- no: If no, said agent shall obtain a business license prior to filing application.

THE UNDERSIGNED certifies that the information supplied for this application is complete and accurate, and, pursuant to Section 11-301B of the Zoning Ordinance, hereby grants permission to the City of Alexandria, Virginia, to post placard notice on the property which is the subject of this application.

Land, Clark, Carroll, Mendelson & Blair, P.C.
Duncan W. Blair, Esquire

Print Name of Applicant or Agent _____

524 King Street

Mailing/Street Address _____

Alexandria Virginia 22314

City and State _____ Zip Code _____

Signature _____

703 836-1000 703 549-3335

Telephone # Fax #

Email: dblair@landclark.com

August 26, 2011

Date _____

DO NOT WRITE IN THIS SPACE - OFFICE USE ONLY

Application Received: _____ Fee Paid: \$ _____

Legal advertisement: _____

ACTION - PLANNING COMMISSION _____ ACTION - CITY COUNCIL: _____

MPA # 2011-0007
 REZ # 2011-0002

SUBJECT PROPERTY

Provide the following information for each property for which an amendment is being requested. (Attach separate sheets if needed.)

| Address Tax Map - Block - Lot | Land Use Existing - Proposed | | Master Plan Designation Existing - Proposed | | Zoning Designation Existing - Proposed | | Frontage (ft.) Land Area (acres) |
|----------------------------------|---------------------------------|---------------|---|-----------|--|------------|--|
| | | | | | | | |
| 1 <u>032.01-01-04</u> | <u>Retail</u> | <u>Retail</u> | <u>CG</u> | <u>OC</u> | <u>CG</u> | <u>OC*</u> | <u>421.79 ft (King Street)</u> <u>449.52 ft (Braddock Rd)</u> <u>2.997 acres</u> |
| 2 <u>3915-03-01-01</u> | <u>Retail</u> | <u>Retail</u> | | | <u>CG</u> | <u>OC*</u> | <u>3211.19 ft (King Street)</u> <u>0.408 acres</u> |
| 3 _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| 4 _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |

* With proffered development site plan (DSUP #2011-00015)

PROPERTY OWNERSHIP

Individual Owner Corporation or Partnership Owner : Safeway Inc. is publicly owned corporation traded on the New York Stock Exchange (SWY). No person or entity owns more than a 10% interest in the corporation. Identify each person or individual with ownership interest. If corporation or partnership owner, identify each person with more than 10% interest in such corporation or partnership

- Name: _____ Extent of Interest: _____
Address: _____
- Name: _____ Extent of Interest: _____
Address: _____
- Name: _____ Extent of Interest: _____
Address: _____
- Name: _____ Extent of Interest: _____
Address: _____



MPA # 2011-0007
REZ # 2011-0002

JUSTIFICATION FOR AMENDMENT

(attach separate sheets if needed)

- 1. Explain how and why any proposed amendment(s) to the Master Plan are desirable, beneficial to surrounding properties, in character with the applicable Small Area Plan and consistent with City policies:

See Attached.

- 2. Explain how and why the proposed amendment to the Zoning Map(s) is consistent with the proposed amendment to the Master Plan, or, if no amendment to the Master Plan is being requested, how the proposed zoning map amendment is consistent with the existing Master Plan:

See Attached.

- 3. Explain how the property proposed for reclassification will be served adequately by essential public facilities and services such as highways, streets, parking spaces, police and fire, drainage structures, refuse disposal, water and sewers, and schools.

The proposed reclassification from the CG zone designation to OC with a proffered development site plan allows Safeway Inc. to construct a new, modern "Lifestyle" store on its property to better serve the community.

The increased density allows Safeway Inc. to construct the on grade structured parking facility. The new grocery store and the independent retail building are within the allowable height and density of the existing CG zoning. It is not anticipated that the new grocery store that will be constructed under the requested rezoning will materially increase the use intensity of the existing grocery store. As such the existing infrastructure as modified by the proffered development site plan is adequate to serve the proposed redevelopment.

- 4. If this application is for conditional zoning approval pursuant to Section 11-804 of the Zoning Ordinance, identify all proffered conditions that are to be considered part of this application (see Zoning Ordinance Section 11-804 for restrictions on conditional zoning):

Safeway Inc. is proffering as part of its request to rezone the property that the redevelopment will be

consistent with the development site plan filed as DSUP 2011-00015.

MPA#2011-0007
REZ#2011-0002

Zoning Map Amendment
Safeway Inc.
3526 King Street

REVISED
9/19/2011

2. Explain how and why the proposed amendment to the Zoning Map is consistent with the amendment to the Master Plan, or, if no amendment to the Master Plan is being requested, how the proposed Zoning Map amendment is consistent with the existing Master Plan.

The Fairlington/Bradlee Small Area Plan chapter of the City of Alexandria Master Plan, 1992, as amended (the "Plan") assigns the property owned by Safeway Inc. and currently improved by an existing grocery store as master plan Land Use designation Commercial General which was consistent with the use of the property as a grocery store. The Plan also recommended that the property be down zoned from the then existing C-2 zoning classification to what was then a new classification CG Commercial General to correspond with the Master Plan Land Use designation.

The stated purpose of the recommendation for the down zoning in the Plan was to advance one of the Plan's goals to "preserve important neighborhood retail facilities, to encourage new neighborhood serving retail, and to limit the extent and amount of office development." Specifically the Plan's recommendation for CG zoning with a .5 FAR planned and zoned the property for the existing store essentially locking the property into the existing sized store and surface parking facility and grocery store building and effectively precluding future expansions and renovation to better serve the community; such as those currently contemplated for the property. Twenty years later, the store is outdated and in need of modernization to bring the store into current standards for the industry and to meet customer's expectations and needs. The requested Master Plan and Zoning amendments allows for the store to modernize and expand while remaining consistent with the intent of the goals and objectives of the Plan by retaining and encouraging neighborhood serving retail.

The requested Master Plan amendment is to change the land use designation of the property from Commercial General to the OC Office Commercial land Use designation defined in the Plan as "moderate density, low height office development." The stated rationale for the CG Land Use Designation in the Plan was to: "These areas are designated for commercial and are primarily retail and service oriented commercial. Designations the area for commercial general will help to retain the strong retail base that now exists, and to discourage their redevelopment for excessive amounts of office. This designation will, in addition, accommodate the automobile sales and service on the two sites owned by Lindsay Cadillac Co. and anticipated to remain on these sites for the indefinite future and/or would permit office development on these sites.

The requested rezoning to the OC zoning increases the FAR from .5 to a 1.0 FAR permitting the store to expand, but with the proffered development site plan (DSUP 2011-00015) insures that use of the property is limited to the retail grocery store protecting the goals and objectives of the Plan by preserving and enhancing neighborhood serving retail to better serve the Community.



BOHLER ENGINEERING

22630 Davis Drive, Suite 200
Sterling, VA 20164
PHONE 703.709.9500
FAX 703.709.9501

*MPA # 2011-0007
REZ # 2011-0002*

METES AND BOUNDS DESCRIPTION

LOT 901
TAYLOR STREET CORPORATION
INSTR. #6184
AND
LOT 3915-03-01-01
TAYLOR STREET CORPORATION
D.B. 471 PG. 116

LANDS OF
SAFEWAY STORE, INCORPORATED
D.B. 1019 PG. 97
D.B. 1011 PG. 184
POTOMAC DISTRICT
CITY OF ALEXANDRIA, VIRGINIA

BEGINNING AT THE INTERSECTION OF THE SOUTHWESTERLY RIGHT-OF-WAY LIMITS OF KING STREET, VA RTE. 7 (165' WIDE RIGHT-OF-WAY), WITH THE DIVISION LINE BETWEEN LOT 901, TAYLOR STREET CORPORATION (INSTR. #6184) ON THE WEST, AND THE LANDS OF SUNOCO, INC. (R&M) (INSTR. #060010385) ON THE EAST, THENCE WITH SAID DIVISION LINE;

1. SOUTH 44 DEGREES - 02 MINUTES - 20 SECONDS WEST, 182.37 FEET TO A REBAR FOUND ON THE NORTHERLY RIGHT-OF-WAY LIMITS OF BRADDOCK ROAD, VA RTE. 620 (60' WIDE RIGHT-OF-WAY), THENCE WITH SAID NORTHERLY RIGHT-OF-WAY LIMITS;
2. NORTH 85 DEGREES - 38 MINUTES - 00 SECONDS WEST, 449.52 FEET, THENCE DEPARTING SAID NORTHERLY RIGHT-OF-WAY LIMITS AND WITH THE DIVISION LINE BETWEEN LOT 3915-03-02, TAYLOR STREET CORPORATION (D.B. 461 PG. 549) ON THE WEST, AND SAID LOT 901 ON THE EAST;
3. NORTH 44 DEGREES - 02 MINUTES - 20 SECONDS EAST, 234.67 FEET TO THE INTERSECTION OF SAID DIVISION LINE, WITH THE DIVISION LINE BETWEEN SAID LOT 3915-03-02 ON THE SOUTHWEST, AND LOT 3915-03-01-01, TAYLOR STREET CORPORATION (D.B. 471 PG. 116) ON THE NORTHEAST, THENCE WITH SAID DIVISION LINE;
4. NORTH 45 DEGREES - 57 MINUTES - 40 SECONDS WEST, 75.80 FEET TO THE INTERSECTION OF SAID DIVISION LINE, WITH THE DIVISION LINE BETWEEN LOT 1001, TAYLOR STREET CORPORATION (D.B. 1285 PG. 1630) ON THE NORTHWEST, AND SAID LOT 3915-03-01-01 ON THE SOUTHEAST, THENCE WITH SAID DIVISION LINE;
5. NORTH 44 DEGREES - 02 MINUTES - 20 SECONDS EAST, 234.67 FEET TO A POINT ON THE SAID SOUTHWESTERLY RIGHT-OF-WAY LIMITS OF KING STREET, THENCE WITH SAID SOUTHWESTERLY RIGHT-OF-WAY LIMITS;
6. SOUTH 45 DEGREES - 57 MINUTES - 40 SECONDS EAST, 421.79 FEET TO THE POINT OF BEGINNING.

CONTAINING 130,533 SQUARE FEET OR 2.997 ACRES

OTHER OFFICE LOCATIONS:

- Southborough, MA
508.480.9900
- Albany, NY
518.438.9900
- Ronkonkoma, NY
631.738.1200
- Warren, NJ
908.668.8300
- Center Valley, PA
610.709.9971
- Chalfont, PA
215.996.9100
- Philadelphia, PA
267.402.3400
- Towson, MD
410.821.7900
- Bowie, MD
301.809.4500
- Warrenton, VA
540.349.4500
- Fort Lauderdale, FL
954.202.7000
- Tampa, FL
813.379.4100


MVA# 2011-0007
REZ# 2011-0002



BEING THE SAME PROPERTY AS DESCRIBED IN A REPORT OF TITLE, PREPARED BY CHICAGO TITLE INSURANCE COMPANY, CASE NUMBER 1000-62245, WITH A REPORT DATE OF OCTOBER 4, 2010 AND IS SUBJECT TO RESTRICTIONS, COVENANTS AND OR EASEMENTS AS CONTAINED THEREIN.



J:\S21823\WCD\plan\S21823-Cover-CofA.dwg Aug 28, 2011 - 11:18am
PRINTED BY: mcd

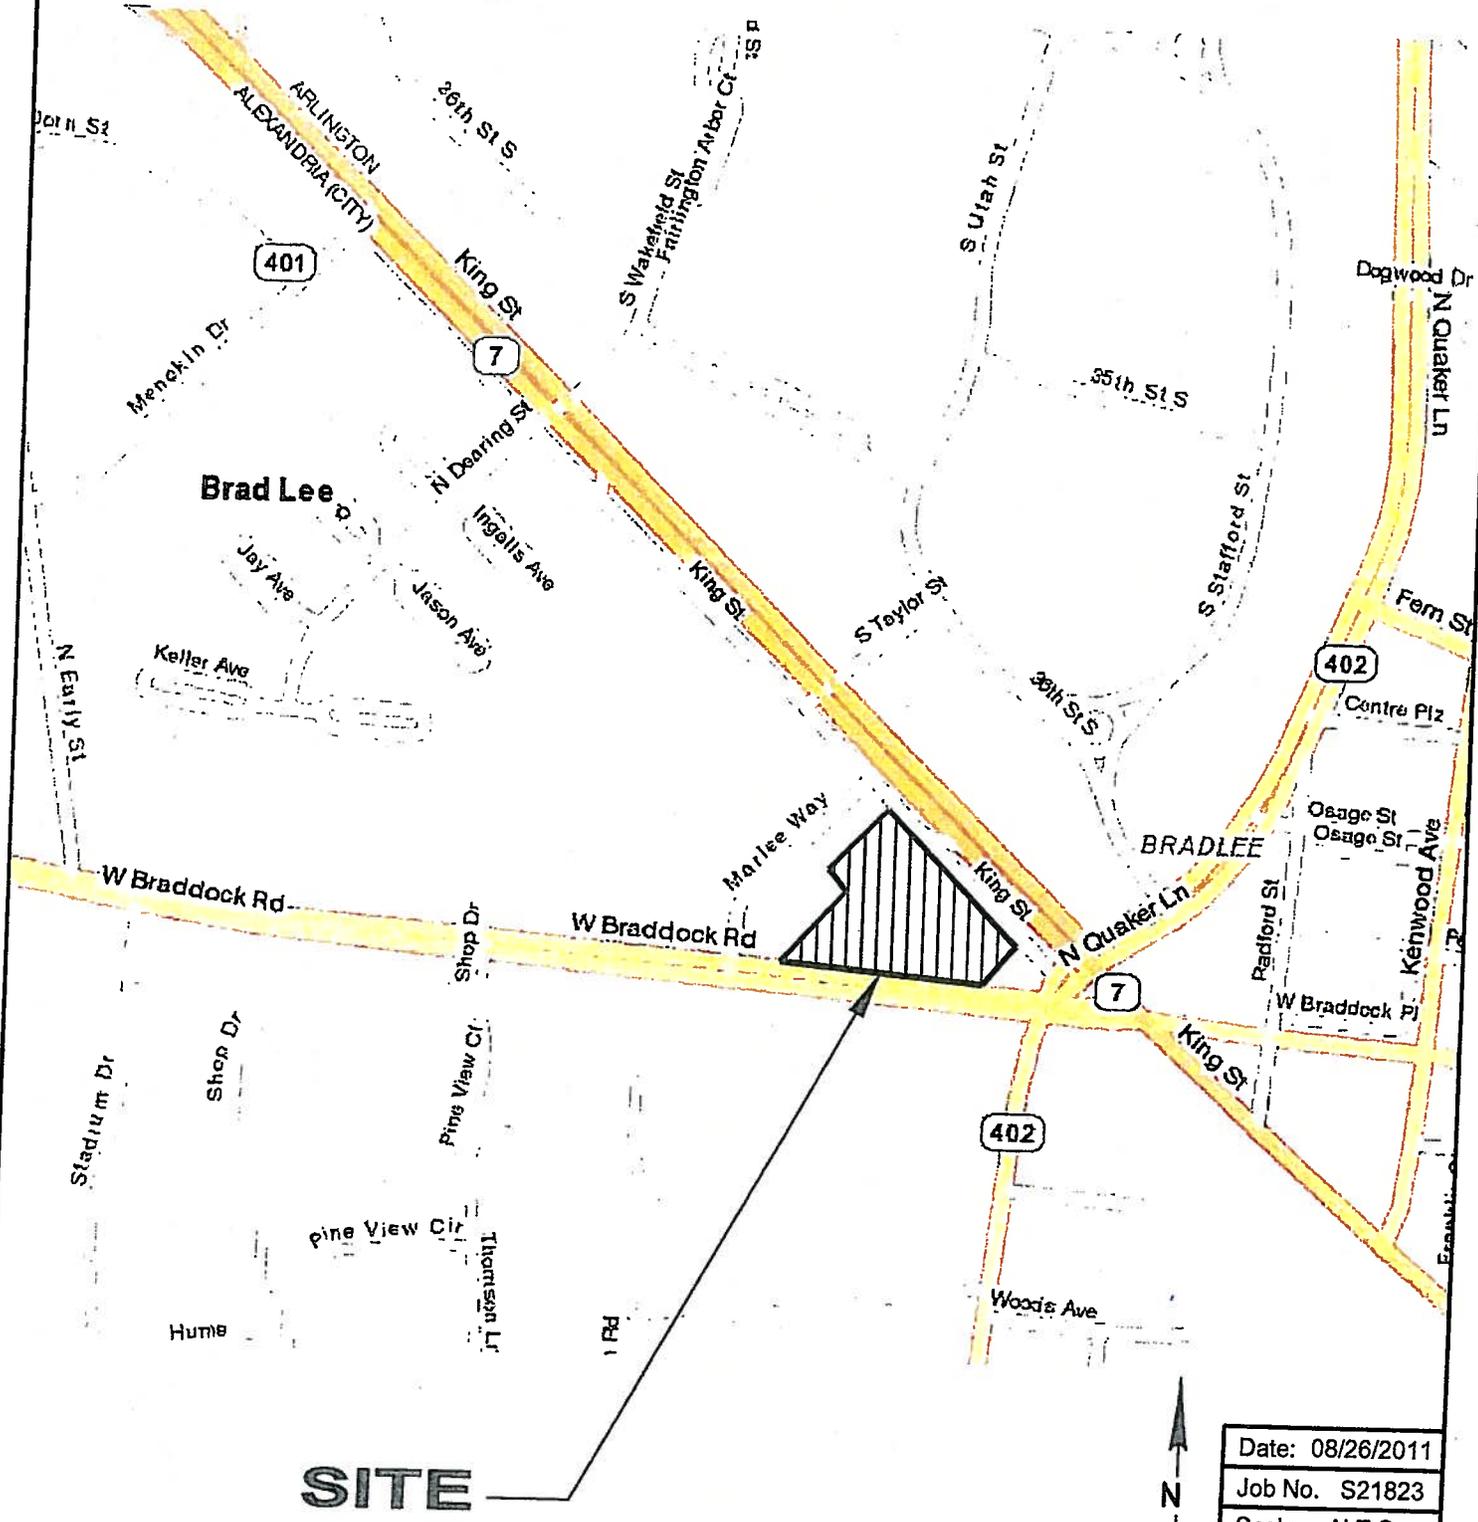

SITE



| |
|-----------------------|
| Date: 08/26/2011 |
| Job No. S21823 |
| Scale: N.T.S |
| File: S21823-CofA.dwg |
| © 2011 |




4200 FORBES BOULEVARD,
SUITE 205
LANHAM, MD 20706
PHONE: 301.918.2662
FAX: 301.918.2663
www.cphengineers.com

VICINITY MAP
SAFeway
3526 KING STREET
ALEXANDRIA, VIRGINIA 22302


EXHIBIT
1
Page 1
© 2011

76

GRAPHIC SCALE



(IN FEET)
1 inch = 100 ft.

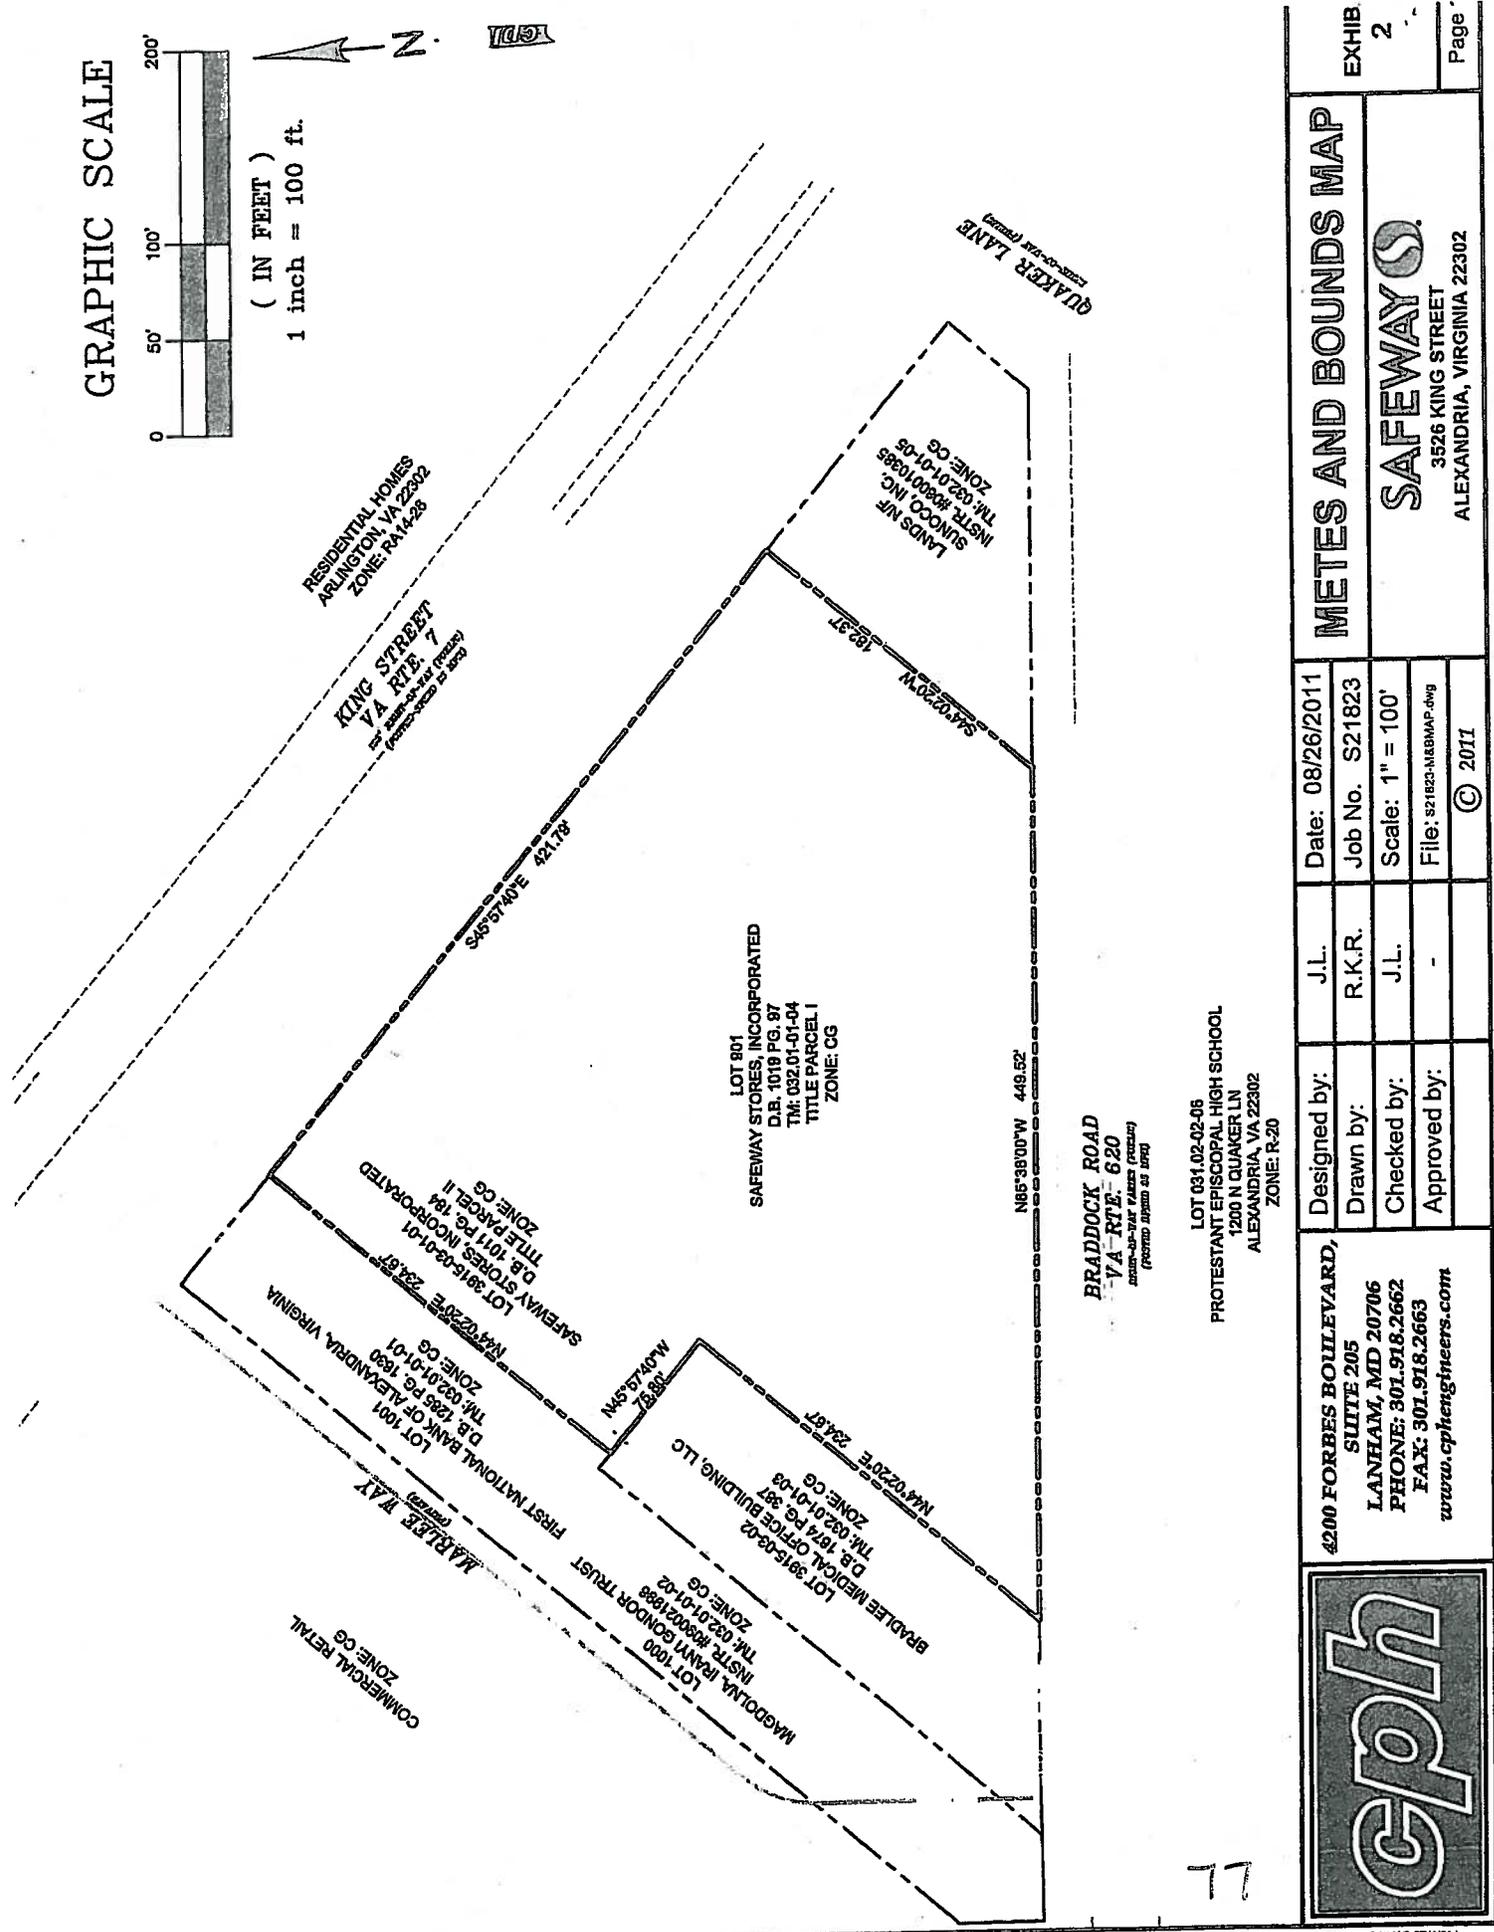

4200 FORBES BOULEVARD,
SUITE 205
LANHAM, MD 20706
PHONE: 301.918.2662
FAX: 301.918.2663
www.cphengineers.com

| | | | |
|--------------|--------|---------|-------------------|
| Designed by: | J.L. | Date: | 08/26/2011 |
| Drawn by: | R.K.R. | Job No. | S21823 |
| Checked by: | J.L. | Scale: | 1" = 100' |
| Approved by: | - | File: | S21823-MEBMAP.dwg |
| | | © | 2011 |

METES AND BOUNDS MAP


SAFEWAY
3526 KING STREET
ALEXANDRIA, VIRGINIA 22302

EXHIBIT 2
Page

GRAPHIC SCALE



(IN FEET)
1 inch = 60 ft.



| SYMBOL | SIZE | DESCRIPTION |
|--------|----------|-------------|
| 1 | 8" x 12" | STANDARD |
| 2 | 8" x 12" | STANDARD |
| 3 | 8" x 12" | STANDARD |
| 4 | 8" x 12" | STANDARD |
| 5 | 8" x 12" | STANDARD |
| 6 | 8" x 12" | STANDARD |
| 7 | 8" x 12" | STANDARD |
| 8 | 8" x 12" | STANDARD |
| 9 | 8" x 12" | STANDARD |
| 10 | 8" x 12" | STANDARD |
| 11 | 8" x 12" | STANDARD |
| 12 | 8" x 12" | STANDARD |
| 13 | 8" x 12" | STANDARD |
| 14 | 8" x 12" | STANDARD |
| 15 | 8" x 12" | STANDARD |
| 16 | 8" x 12" | STANDARD |
| 17 | 8" x 12" | STANDARD |
| 18 | 8" x 12" | STANDARD |
| 19 | 8" x 12" | STANDARD |
| 20 | 8" x 12" | STANDARD |
| 21 | 8" x 12" | STANDARD |
| 22 | 8" x 12" | STANDARD |
| 23 | 8" x 12" | STANDARD |
| 24 | 8" x 12" | STANDARD |
| 25 | 8" x 12" | STANDARD |
| 26 | 8" x 12" | STANDARD |
| 27 | 8" x 12" | STANDARD |
| 28 | 8" x 12" | STANDARD |
| 29 | 8" x 12" | STANDARD |
| 30 | 8" x 12" | STANDARD |
| 31 | 8" x 12" | STANDARD |
| 32 | 8" x 12" | STANDARD |
| 33 | 8" x 12" | STANDARD |
| 34 | 8" x 12" | STANDARD |
| 35 | 8" x 12" | STANDARD |
| 36 | 8" x 12" | STANDARD |
| 37 | 8" x 12" | STANDARD |
| 38 | 8" x 12" | STANDARD |
| 39 | 8" x 12" | STANDARD |
| 40 | 8" x 12" | STANDARD |
| 41 | 8" x 12" | STANDARD |
| 42 | 8" x 12" | STANDARD |
| 43 | 8" x 12" | STANDARD |
| 44 | 8" x 12" | STANDARD |
| 45 | 8" x 12" | STANDARD |
| 46 | 8" x 12" | STANDARD |
| 47 | 8" x 12" | STANDARD |
| 48 | 8" x 12" | STANDARD |
| 49 | 8" x 12" | STANDARD |
| 50 | 8" x 12" | STANDARD |
| 51 | 8" x 12" | STANDARD |
| 52 | 8" x 12" | STANDARD |
| 53 | 8" x 12" | STANDARD |
| 54 | 8" x 12" | STANDARD |
| 55 | 8" x 12" | STANDARD |
| 56 | 8" x 12" | STANDARD |
| 57 | 8" x 12" | STANDARD |
| 58 | 8" x 12" | STANDARD |
| 59 | 8" x 12" | STANDARD |
| 60 | 8" x 12" | STANDARD |
| 61 | 8" x 12" | STANDARD |
| 62 | 8" x 12" | STANDARD |
| 63 | 8" x 12" | STANDARD |
| 64 | 8" x 12" | STANDARD |
| 65 | 8" x 12" | STANDARD |
| 66 | 8" x 12" | STANDARD |
| 67 | 8" x 12" | STANDARD |
| 68 | 8" x 12" | STANDARD |
| 69 | 8" x 12" | STANDARD |
| 70 | 8" x 12" | STANDARD |
| 71 | 8" x 12" | STANDARD |
| 72 | 8" x 12" | STANDARD |
| 73 | 8" x 12" | STANDARD |
| 74 | 8" x 12" | STANDARD |
| 75 | 8" x 12" | STANDARD |
| 76 | 8" x 12" | STANDARD |
| 77 | 8" x 12" | STANDARD |
| 78 | 8" x 12" | STANDARD |
| 79 | 8" x 12" | STANDARD |
| 80 | 8" x 12" | STANDARD |
| 81 | 8" x 12" | STANDARD |
| 82 | 8" x 12" | STANDARD |
| 83 | 8" x 12" | STANDARD |
| 84 | 8" x 12" | STANDARD |
| 85 | 8" x 12" | STANDARD |
| 86 | 8" x 12" | STANDARD |
| 87 | 8" x 12" | STANDARD |
| 88 | 8" x 12" | STANDARD |
| 89 | 8" x 12" | STANDARD |
| 90 | 8" x 12" | STANDARD |
| 91 | 8" x 12" | STANDARD |
| 92 | 8" x 12" | STANDARD |
| 93 | 8" x 12" | STANDARD |
| 94 | 8" x 12" | STANDARD |
| 95 | 8" x 12" | STANDARD |
| 96 | 8" x 12" | STANDARD |
| 97 | 8" x 12" | STANDARD |
| 98 | 8" x 12" | STANDARD |
| 99 | 8" x 12" | STANDARD |
| 100 | 8" x 12" | STANDARD |



APPROVED
SPECIFIC TO THIS PROJECT


DATE: 08/28/2011

PROJECT: SAFETYWAY

SITE PLAN NO. C-4A

DATE RECORDED: 08/28/2011

RECORD NO.: 1000000000

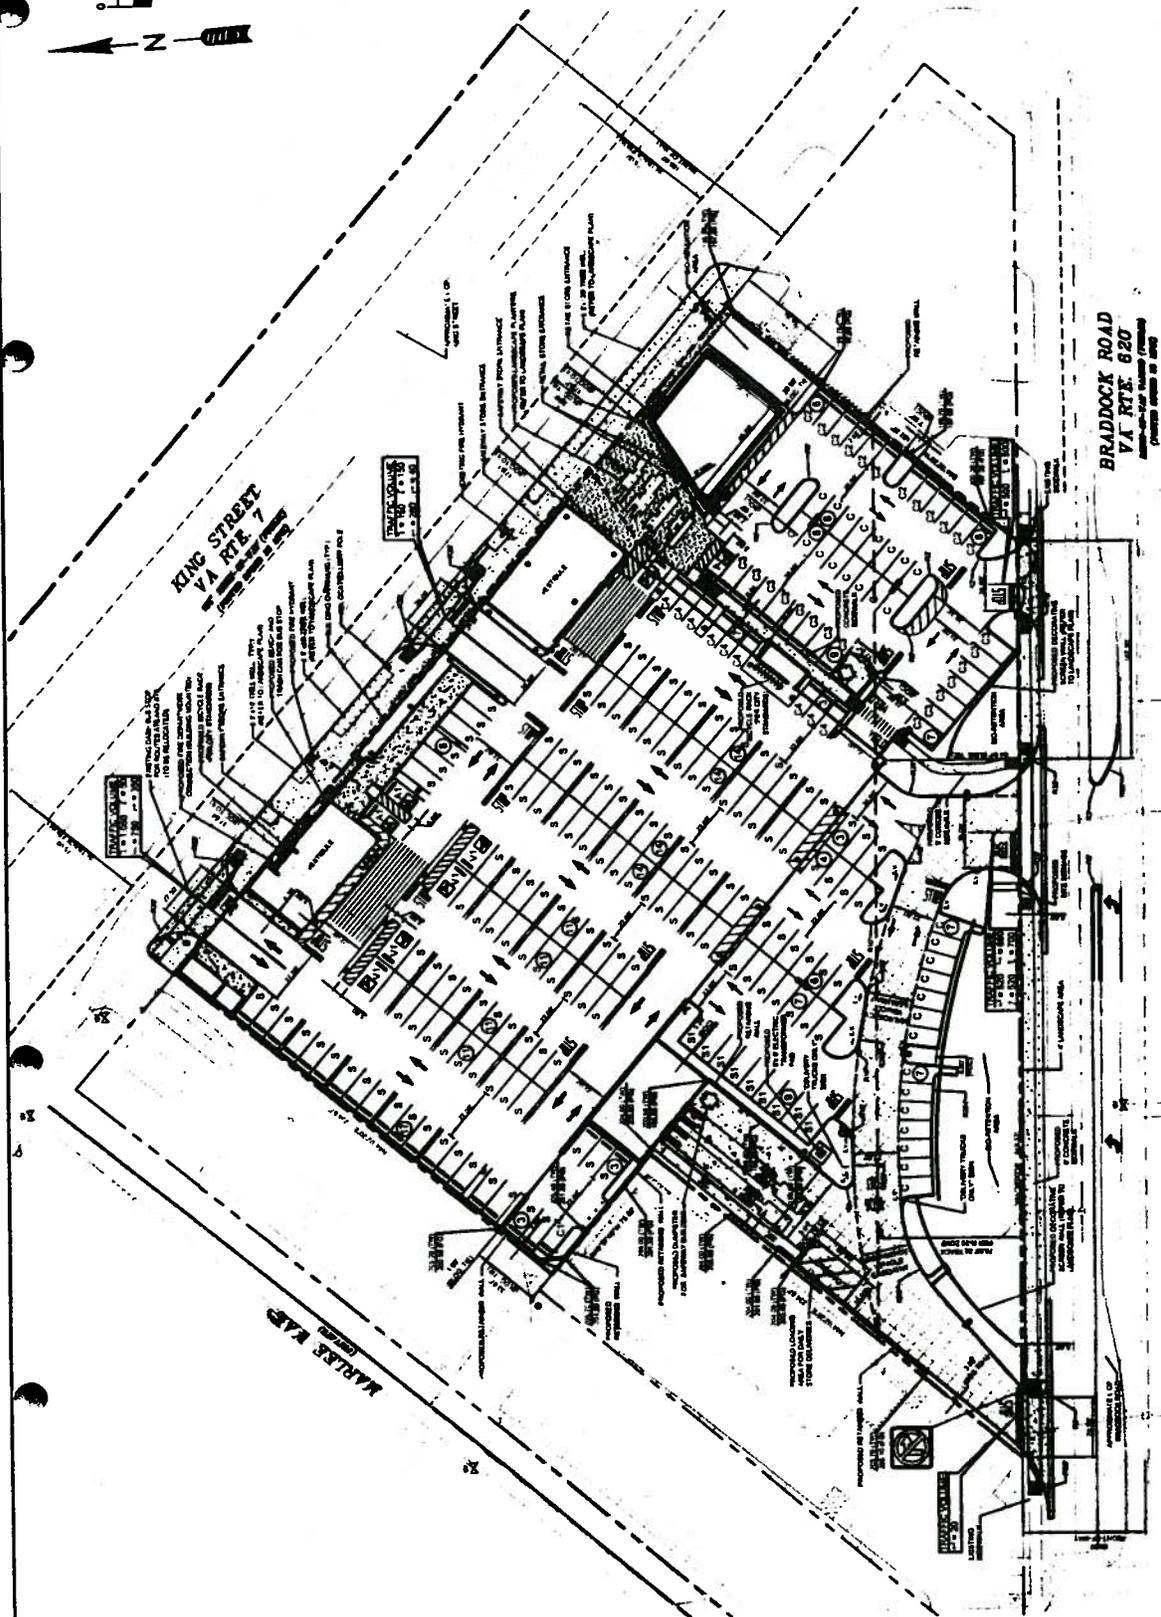

Sheet No. **C-4A**

SITE DEVELOPMENT PLAN

SAFETYWAY
385 KING STREET
ALEXANDRIA, VIRGINIA 22304

BRADDOCK ROAD
VA RTE. 620
(PARTIAL SECTION TO BE)

DATE: Sep 14, 2011

4200 FORBES BOULEVARD,
SUITE 205
LANHAM, MD 20706
PHONE: 301.918.2663
FAX: 301.918.2663
www.cphangthiers.com



| | | | |
|--------------|----------|----------|------------|
| signed by: | J.L. RKR | Date: | 08/28/2011 |
| checked by: | J.L. RKR | Job No.: | S21823 |
| approved by: | D.P.M. | File: | SAFETYWAY |
| scale: | 1" = 60' | © | 2011 |

3526 King Street Safeway

Draft Rezoning Notice Language

Rezoning #2011 – 0002 Consideration of a request for a zoning map amendment to rezone the property from the CG zone to the OC zone with a proffered development site plan.



APPLICATION

PRELIMINARY
REVIEW

DEVELOPMENT SPECIAL USE PERMIT with SITE PLAN

DSP # 2011-00015 **Project Name:** King Street Braddock Road Safeway

PROPERTY LOCATION: 3526 King Street

TAX MAP REFERENCE: 032.01-01-04 and 3915-03-01-01 **ZONE:** CG*

*proposed zoning OC with proffers

APPLICANT:

Name: Safeway Inc., a Delaware corporation

Address: 4551 Forbes Boulevard, Lanham, Maryland 20706

PROPERTY OWNER:

Name: Safeway In., a Delaware corporation

Address: 4551 Forbes Boulevard, Lanham, Maryland 20706

SUMMARY OF PROPOSAL Approval of a Development Special Use Permit with Site Plan to construct of a new 61,323 sf Safeway store with above grade structured parking, a 3,136 sf stand-alone retail building, and a surface parking area.

MODIFICATIONS REQUESTED Modification of the zone transition setback

SUP^s REQUESTED (1) Retail Shopping Facility greater than 20,000 sf (§ 4-803 AA of the AZO), (2) parking reduction special use permit (§ 8-100 (A) (4) of the AZO), and (3) Traffic Management Plan special use permit (separate application).

THE UNDERSIGNED hereby applies for Development Site Plan with Spedal Use P ermit approval in accordance with the provisions of Section 11-400 of the Zoning Ordinance of the City of Alexandria, Virginia.

THE UNDERSIGNED, having obtained permission from the property owner, hereby grants permission to the City of Alexandria to post placard notice on the property for which this application is requested, pursuant to Article XI, Section 11-301 (B) of the 1992 Zoning Ordinance of the City of Alexandria, Virginia.

THE UNDERSIGNED also attests that all of the information herein provided and specifically including all surveys, drawings, etc., required of the applicant are true, correct and accurate to the best of his/her knowledge and belief.

Land, Clark, Carroll, Mendelson and Blair, P.C.

Print Name of Applicant or Agent

524 King Street

Mailing/Street Address

Alexandria Virginia 22314

City and State Zip Code

Duncan W. Blair
Signature Duncan W. Blair, Esquire

(703) 836-1000 (703) 549-3335

Telephone # Fax #

dclair@landclark.com

Email address

August 26, 2011

Date

| DO NOT WRITE IN THIS SPACE - OFFICE USE ONLY | |
|--|--|
| Application Received: _____ | Received Plans for Completeness: _____ |
| Fee Paid and Date: _____ | Received Plans for Preliminary: _____ |
| ACTION - PLANNING COMMISSION: _____ | |
| ACTION - CITY COUNCIL: _____ | |

ALL APPLICANTS MUST COMPLETE THIS FORM.

Supplemental forms are required for child care facilities, restaurants, automobile oriented uses and freestanding signs requiring special use permit approval.

1. The applicant is: (check one)

the Owner Contract Purchaser Lessee or Other: _____ of the subject property.

State the name, address and percent of ownership of any person or entity owning an interest in the applicant, unless the entity is a corporation or partnership in which case identify each owner of more than ten percent.

None. Safeway Inc., a Delaware corporation is publicly-owned and traded on the New York Stock Exchange (SWY).

If property owner or applicant is being represented by an authorized agent, such as an attorney, realtor, or other person for which there is some form of compensation, does this agent or the business in which the agent is employed have a business license to operate in the City of Alexandria, Virginia?

- Yes.** Provide proof of current City business license.
- No.** The agent shall obtain a business license prior to filing application, if required by the City Code.

2. Narrative description. The applicant shall describe below the nature of the request *in detail* so that the Planning Commission and City Council can understand the nature of the operation and the use, including such items as the nature of the activity, the number and type of patrons, the number of employees, the hours, how parking is to be provided for employees and patrons, and whether the use will generate any noise. If not appropriate to the request, delete pages 6-9. (Attach additional sheets if necessary.)

Safeway Inc, is requesting a Development Special Use Permit with Site Plan to redevelop the existing Safeway grocery store located at 3526 King Street at the of intersection of Braddock Road in the Fairlington/Bradlee Small Area of the City. The existing 41,693± square foot grocery store and 199 surface parking spaces will be demolished and the property will be redeveloped with a new modern 61,323 square foot "Lifestyle" Safeway grocery store and a 3,136± sf stand-alone retail building and associated required parking and public and private infrastructure. Safeway patrons will be able to enter from two entrances off both Braddock Road and the King Street service road.

The new two-story building designed by Lee Quill, Cunningham Quill-Architects consists of a first level used for at grade surface parking that is integrated architecturally into the design of the building. The new grocery store will be constructed on the second floor of the building. Additional surface parking is provided on the southern sides of the property. A total of 228 parking spaces are being provided. The amount of parking being provided, while less than required under the Alexandria Ordinance, is consistent with the parking provided by comparable stores in the area.

3. **How many patrons, clients, pupils and other such users do you expect?**

Specify time period (i.e., day, hour, or shift).

It is anticipated that approximately 22,000 patrons will shop in the store on a weekly basis. The peak usage will occur between the hours of 5 pm and 7pm weekdays and 11 am to 1pm on weekends.

4. **How many employees, staff and other personnel do you expect?**

Specify time period (i.e. day, hour, or shift).

The store will employ approximately 150 employees on a full or part time basis working in shifts. It is anticipated that no more than 60 employees will be in the store at any given time.

5. Describe the proposed hours and days of operation of the proposed use:

| Day | Hours | Day | Hours |
|----------------------|--------------------|-----|-------|
| Monday – Tuesday | 7:00 AM – 12:00 AM | | |
| Wednesday – Saturday | 24 hours | | |
| Sunday | 7:00 AM – 10:00 PM | | |

The above times reflect existing store operating hours. The proposed store may retain these hours, or may be open 24 hours every day.

6. **Describe any potential noise emanating from the proposed use:**

A. Describe the noise levels anticipated from all mechanical equipment and patrons.

Noise levels from all mechanical equipment will not exceed permitted levels under the Alexandria City Code.

B. How will the noise from patrons be controlled?

It is not anticipated that patron noise will be a source of complaints; as such, no extraordinary noise mitigation or control measures are warranted.

7. **Describe any potential odors emanating from the proposed use and plans to control them:**

It is not anticipated that offensive odors will emanate from the use of the property as a retail grocery store.

8. Provide information regarding trash and litter generated by the use:

- A. What type of trash and garbage will be generated by the use?
Trash will consist mainly of dry packaged goods. Cardboard, wood, paper, plastic bags, fat, bone and grease will be recycled. Cardboard will be broken down and baled at the store and returned to the distribution center in Safeway trucks. Organic matter will be collected in the store and taken off-site to the distribution center in compostable containers by Safeway trucks.
- B. How much trash and garbage will be generated by the use?
Approximately 8 cubic yards per day, 40 to 48 cubic yards per week is anticipated.
- C. How often will trash be collected?
Trash is anticipated to be collected 5 or 6 times per week.
- D. How will you prevent littering on the property, streets and nearby properties?
Trash receptacles will be provided near the store entrances.

9. Will any hazardous materials, as defined by the state or federal government, be handled, stored, or generated on the property?

Yes. No.

If yes, provide the name, monthly quantity, and specific disposal method below:

Small quantities of materials defined as hazardous, generally appropriate for use in the operation of a retail business or customarily sold to consumers at a grocery store will be stored, used, sold or disposed of in accordance with applicable federal, state and local regulations.

10. Will any organic compounds (for example: paint, ink, lacquer thinner, or cleaning or degreasing solvent) be handled, stored, or generated on the property?

Yes. No.

If yes, provide the name, monthly quantity, and specific disposal method below:

Small quantities of organic compounds, generally appropriate for use in the operation of a retail business or customarily sold to consumers at a grocery store will be stored, used, sold or disposed of in accordance with applicable federal, state and local regulations.

11. What methods are proposed to ensure the safety of residents, employees and patrons?

The site has been designed to ensure adequate light levels will be maintained throughout the site.

The site landscaping has been design so as not to conceal criminals. Additionally, the garage parking level is located at-grade, with glass vestibules located on the King Street (north) side and daylight openings on the Braddock Road (south) side.

ALCOHOL SALES

12. Will the proposed use include the sale of beer, wine or mixed drinks?

Yes. **No.**

If yes, describe alcohol sales below, including if the ABC license will include on-premises and/or off-premises sales. Existing uses must describe their existing alcohol sales and/or service and identify any proposed changes in that aspect of the operation.

The existing Safeway store provides beer and wine for sale in-store and consumption off-site. No changes to the existing operation are proposed for the redeveloped store.

PARKING AND ACCESS REQUIREMENTS

13. Provide information regarding the availability of off-street parking:

A. How many parking spaces are required for the proposed use pursuant to section 8-200 (A) of the zoning ordinance?

Per the City's zoning ordinance, 330 parking spaces are required.

B. How many parking spaces of each type are provided for the proposed use: 228 spaces

153 Standard spaces

50 Compact spaces

8 Handicapped accessible spaces

17 Other

- C. Where is required parking located? (check one) **on-site** **off-site**

If the required parking will be located off-site, where will it be located?

Pursuant to section 8-200 (C) of the zoning ordinance, commercial and industrial uses may provide off-site parking within 500 feet of the proposed use, provided that the off-site parking is located on land zoned for commercial or industrial uses. All other uses must provide parking on-site, except that off-street parking may be provided within 300 feet of the use with a special use permit.

- D. If a reduction in the required parking is requested, pursuant to section 8-100 (A) (4) or (5) of the zoning ordinance, complete the **Parking Reduction Supplemental Application**.

14. Provide information regarding loading and unloading facilities for the use:

- A. How many loading spaces are required for the use, per section 8-200 (B) of the zoning ordinance? Four (4) loading spaces are required.
- B. How many loading spaces are available for the use? Four (4) loading spaces are provided.
- C. Where are off-street loading facilities located?
The loading dock at the southwest corner of the Safeway building has capacity for two delivery trucks and one trash truck. An additional striped loading space for vendor trucks is located along the "truck only" exit driveway, southwest of the loading dock.
- D. During what hours of the day do you expect loading/unloading operations to occur?
Deliveries will typically take place during the morning hours.
-
- E. How frequently are loading/unloading operations expected to occur, per day or per week, as appropriate?
Approximately 2-3 Safeway trucks are expected daily. An additional 2-3 tractor trailers for several outside vendors are expected weekly, for a total of 20 tractor trailer trucks per week.

15. Is street access to the subject property adequate or are any street improvements, such as a new turning lane, necessary to minimize impacts on traffic flow?

Minor revisions to the curbed median break within Braddock Road south of the center of the site will be required in order to facilitate left turns into and out of the proposed site entrance driveway.

OWNERSHIP AND DISCLOSURE STATEMENT
Use additional sheets if necessary

1. Applicant. State the name, address and percent of ownership of any person or entity owning an interest in the applicant, unless the entity is a corporation or partnership, in which case identify each owner of more than ten percent. The term ownership interest shall include any legal or equitable interest held at the time of the application in the real property which is the subject of the application.

| Name | Address | Percent of Ownership |
|---------|---------|----------------------|
| 1. None | | |
| 2. | | |
| 3. | | |

2. Property. State the name, address and percent of ownership of any person or entity owning an interest in the property located at 3526 King St. (address), unless the entity is a corporation or partnership, in which case identify each owner of more than ten percent. The term ownership interest shall include any legal or equitable interest held at the time of the application in the real property which is the subject of the application.

| Name | Address | Percent of Ownership |
|-----------------|---|----------------------|
| 1. Safeway Inc. | 4551 Forbes Boulevard Lanham, Maryland 20706 | 100% |
| 2. | | |
| 3. | | |

3. Business or Financial Relationships. Each person or entity listed above (1 and 2), with an ownership interest in the applicant or in the subject property is required to disclose any business or financial relationship, as defined by Section 11-350 of the Zoning Ordinance, existing at the time of this application, or within the 12-month period prior to the submission of this application with any member of the Alexandria City Council, Planning Commission, Board of Zoning Appeals or either Boards of Architectural Review.

| Name of person or entity | Relationship as defined by Section 11-350 of the Zoning Ordinance | Member of the Approving Body (i.e. City Council, Planning Commission, etc.) |
|--------------------------|---|---|
| 1. Safeway Inc. | None | Planning Commission and City Council |
| 2. | | |
| 3. | | |

NOTE: Business or financial relationships of the type described in Sec. 11-350 that arise after the filing of this application and before each public hearing must be disclosed prior to the public hearings.

As the applicant or the applicant's authorized agent, I hereby attest to the best of my ability that the information provided above is true and correct.

8/22/11
Date

Duncan W. Blair, Esquire
Printed Name

[Signature]
Signature



APPLICATION - SUPPLEMENTAL

PARKING REDUCTION

Supplemental information to be completed by applicants requesting special use permit approval of a reduction in the required parking pursuant to section 8-100(A)(4) or (5).

1. Describe the requested parking reduction. (e.g. number of spaces, stacked parking, size, off-site location)

330 parking spaces are required for the proposed redevelopment of the property and 228 code-compliant parking spaces are being provided on the surface parking areas and in the on grade structured parking area on the first floor of the new two story building. Safeway Inc. is requesting a parking reduction of 102 spaces.

2. Provide a statement of justification for the proposed parking reduction.

Safeway Inc. is proposing that parking be provided on the basis of 3.6 spaces per one thousand square feet of floor area. The proposed parking ratio is consistent with the parking provided for similar grocery stores in the Metropolitan Washington DC area and other Safeway stores in the region. The parking ratio is consistent with the parking ratio at the existing store. The existing parking lot has 199 parking spaces. The TMP commitments, pedestrian improvements and improvements for transit riders should also increase the number of patrons coming to the site by means other than automobiles.

3. Why is it not feasible to provide the required parking?

The amount of parking being proposed, meets the anticipated parking demand for the new grocery store with convenient layout and access; while at the same time allowing the new landscaped area shown on the plan greatly enhancing the overall aesthetics of the property.

4. Will the proposed reduction reduce the number of available parking spaces below the number of existing parking spaces?

Yes. No. (The existing site contains 199 parking spaces)

5. If the requested reduction is for more than five parking spaces, the applicant must submit a **Parking Management Plan** which identifies the location and number of parking spaces both on-site and off-site, the availability of on-street parking, any proposed methods of mitigating negative effects of the parking reduction.


6. The applicant must also demonstrate that the reduction in parking will not have a negative impact on the surrounding neighborhood.

3526 King Street Safeway


Parking Management Plan

The parking proposed for the new "Lifestyle" Safeway is laid out as an efficient, well-signed and user-friendly parking facility for a traditional stand alone retail use. The parking is all on grade with consisting of outside surface parking and on grade first floor covered parking with the new store located on the second story. Convenient vertical transportation in two ground level lobbies will connect the ground level parking with the second floor grocery store.


The 228 parking spaces being provided, a ratio of 3.6 per thousand square feet of floor area of the store, is consistent with the parking ratios of similar grocery stores in the Metropolitan Washington DC area and other Safeway stores in the region. As such, it is not anticipated that the amount of parking will not fully meet the parking demand generated by the new grocery store creating negative impacts on the surrounding neighborhoods. In fact, there is no available on street parking that will be impacted or diminished if patrons could not park on the property. Safeway does not believe that extraordinary measures are necessary to insure its patrons use the on-site parking facilities.

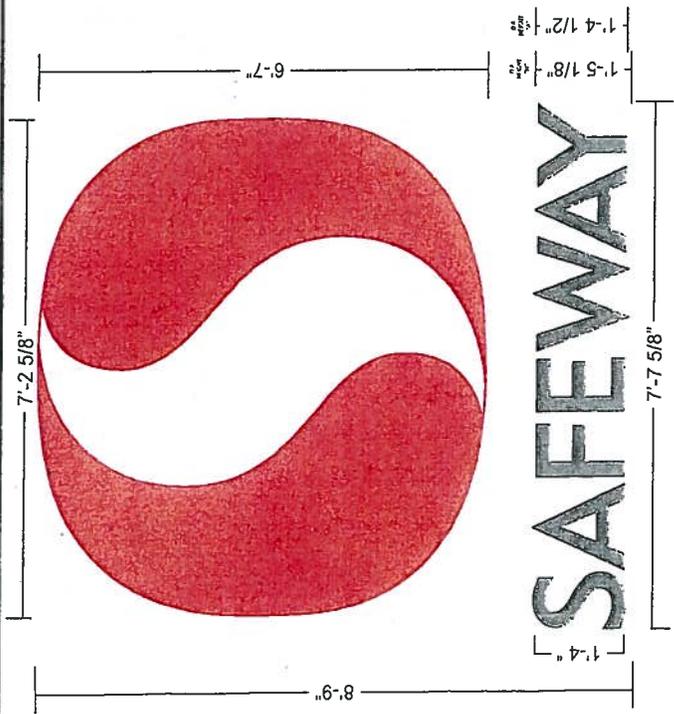

④ SAFEWAY HALO ILLUMINATED LETTERS & 'S' INTERNALLY ILLUMINATED CABINET
SCALE: 3/8" = 1'

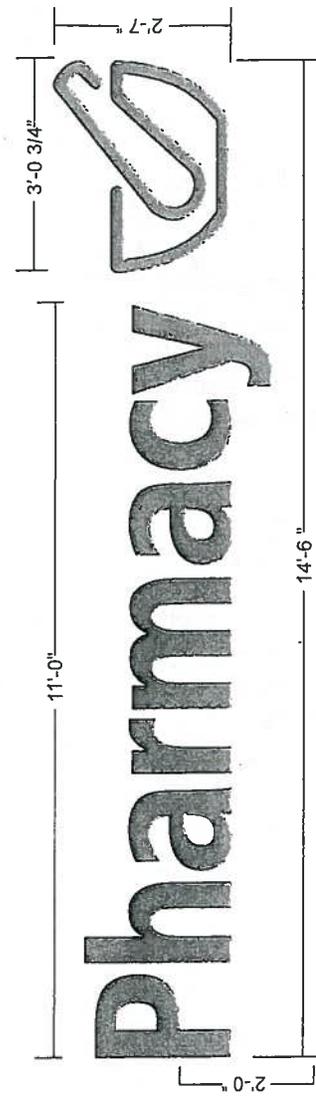

⑥ PHARMACY SCALE: 3/8" = 1'
HALO ILLUMINATED LETTERS & LOGO

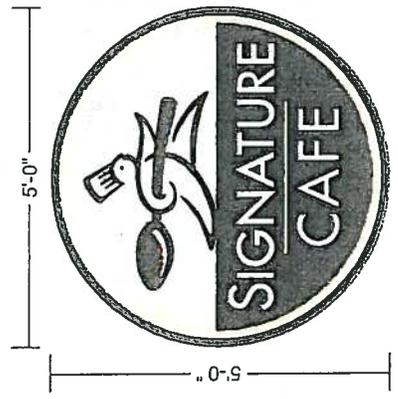

① SIGNATURE CAFE INTERNALLY ILLUMINATED
SCALE: 3/8" = 1'





② STARBUCKS INTERNALLY ILLUMINATED
SCALE: 3/8" = 1'



③ BERGMANN'S DRY CLEANERS INTERNALLY ILLUMINATED CHANNEL LETTERS
SCALE: 3/8" = 1'

NOTE THAT COMPUTER GENERATED COLORS SHOWN ON THIS DRAWING ARE ONLY A REPRESENTATION. ACTUAL COLORS MAY VARY. IF EXACT MATCH IS NEEDED- PLEASE INFORM THE SALESPERSON.

| | | |
|---|--|--|
| Proposed New Signage For: SAFEWAY STORE #3250 Location: 3526 KING ST ALEXANDRIA, VA 22302 COLORS USED: <input type="checkbox"/> PMS 186 <input type="checkbox"/> WHITE <input type="checkbox"/> PMS 7508C <input type="checkbox"/> PMS 7508C <input type="checkbox"/> PMS 2945C <input type="checkbox"/> BLACK <input type="checkbox"/> PMS 5C CUSTOM COLOR MATCHING SAMPLES ON MOST COLORS AVAILABLE @ \$45.00 EACH | | SALES REP: TRICIA RUST DATE: 8-24-11 SCALE: AS NOTED FILE NAME: Safeway Alexandria SKETCH# 00000 ARTIST: AK |
| Proud Members Of: | | |
| Customer must approve sketch prior to fabrication of sign. Customer is responsible for proofreading and checking copy for any and all spelling and grammatical errors. KSI will not be responsible for these errors. Note that computer generated colors shown on this drawing are only a representation. Actual colors may vary. If exact match is needed- please inform the salesperson. Please initial in box provided. CUSTOMER'S APPROVAL | | DESIGN PROPERTY OF KERLEY SIGNS, INC. Not to be reproduced or photocopied without the expressed written consent of Kerley Signs, Inc. The use of this document for bidding purposes to other companies or if the design is reproduced in any form without permission from Kerley Signs, Inc., the customer will be required to pay for this design. Copyright © KERLEY SIGNS, INC. 2010 |
| Kerley Signs | | 7650 Preston Drive, Landover, Md. 20785 PH: (301) 773-6800 FAX: (301) 773-3465 |

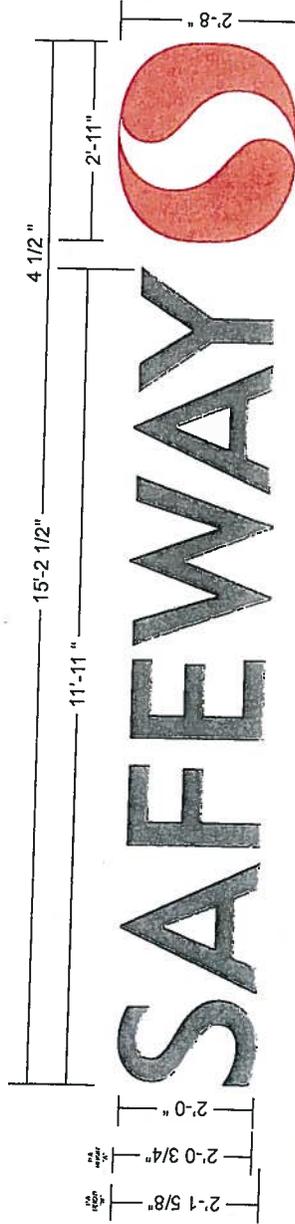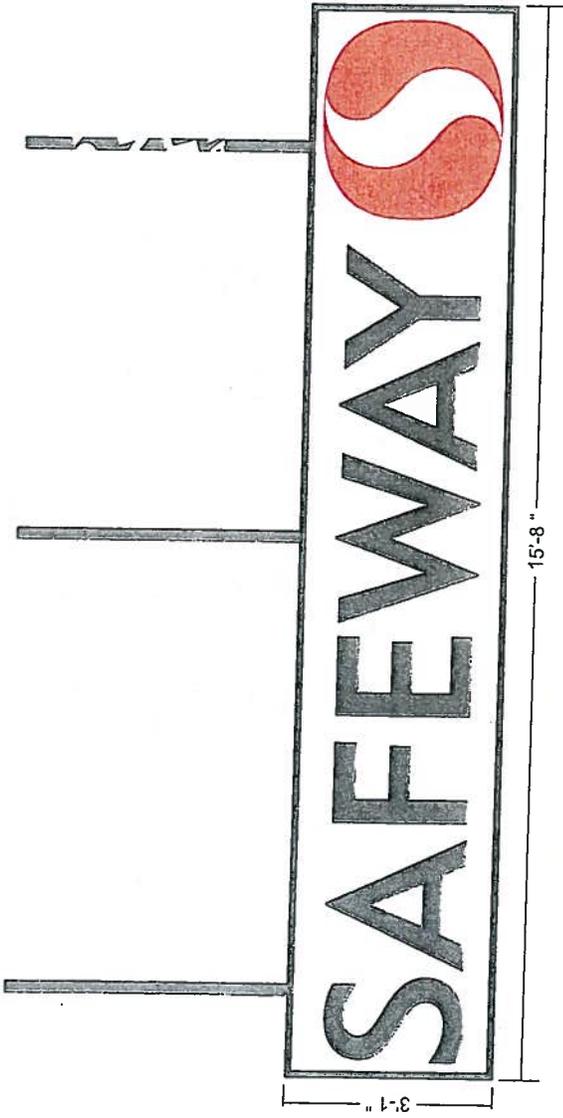

Ⓢ SAFEWAY HANGING SIGN
SCALE: 3/8" = 1'

NOTE THAT COMPUTER GENERATED COLORS SHOWN ON THIS DRAWING ARE ONLY A REPRESENTATION. ACTUAL COLORS MAY VARY. IF EXACT MATCH IS NEEDED- PLEASE INFORM THE SALESPERSON.

Proposed New Signage For: **SAFEWAY STORE #3250**
 Location: 3526 KING ST ALEXANDRIA, VA 22302

SALES REP: TRICIA RUST
DATE: 8-24-11
SCALE: AS NOTED

REVISIONS: Safeway_Alexandria
SKETCH#: 00000
ARTIST: AK

COLORS USED: PMS 186 WHITE BLACK

CUSTOM COLOR MATCHING SAMPLES ON MOST COLORS AVAILABLE @ \$45.00 EACH

Members Of:

Customer must approve sketch prior to fabrication of sign. Customer is responsible for proofreading and checking copy for any and all spelling and grammatical errors. KSI will not be responsible for these errors. Note that computer generated colors shown on this drawing are only a representation. Actual colors may vary. If exact match is needed- please inform the salesperson. Please initial in box provided.


CUSTOMER'S APPROVAL

DESIGN PROPERTY OF KERLEY SIGNS, INC.
 Not to be reproduced or photocopied without the expressed written consent of Kerley Signs, Inc. The use of this document for bidding purposes to other companies or if the design is reproduced in any form without permission from Kerley Signs, Inc. the customer will be required to pay for this design. Copyright © KERLEY SIGNS, INC. 2010




7650 Preston Drive, Landover, Md. 20785
 PH: (301) 773-6800 FAX: (301) 773-3465



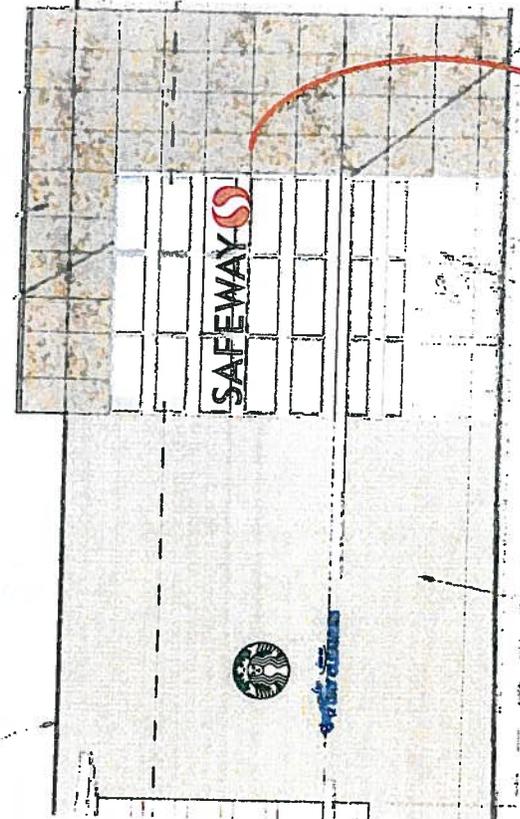

① SAFEWAY - NORTH ELEVATION (PART 2)
SCALE: 1" = 16'

(CHOOSE ONE OPTION)

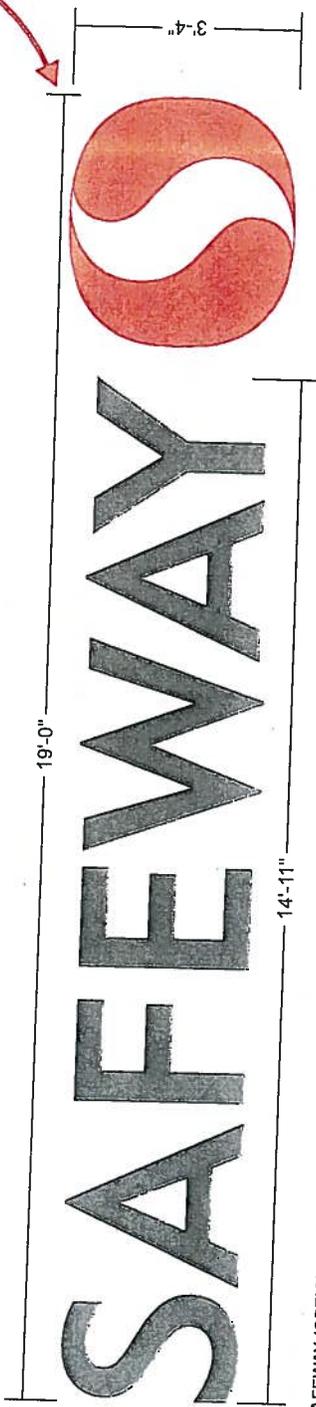

② SAFEWAY (OPTION 2) - PART 2 OF NORTH ELEVATION (SMALLER SIZE OPTION TO FIT SPACE)
SCALE: 3/8" = 1' HALO ILLUMINATED LETTERS & 'S' DIRECT ILLUMINATED CABINET

NOTE THAT COMPUTER GENERATED COLORS SHOWN ON THIS DRAWING ARE ONLY A REPRESENTATION. ACTUAL COLORS MAY VARY. IF EXACT MATCH IS NEEDED- PLEASE INFORM THE SALESPERSON.

Proposed New Signage For: **SAFEWAY STORE #3250**
 Location: 3526 KING ST ALEXANDRIA, VA 22302

COLOURS USED:

| | | | | |
|--|-----------|--|---------|--------------------------------|
| | PMS 2945C | | PMS 186 | <input type="checkbox"/> WHITE |
| | PMS 3415C | | BLACK | <input type="checkbox"/> |

CUSTOM COLOR MATCHING SAMPLES ON MOST COLORS AVAILABLE @ \$45.00 EACH

Proud Members Of:

| | |
|------------|--------------------|
| SALES REP: | TRICIA RUST |
| DATE: | 8-24-11 |
| SCALE: | AS NOTED |
| FILE NAME: | Safeway_Alexandria |
| SKETCH#: | 00000 |
| ARTIST: | AK |


Customer must approve sketch prior to fabrication of sign. Customer is responsible for proofreading and checking copy for any and all spelling and grammatical errors. Show on this drawing are only a representation. Actual colors may vary. If exact match is needed- please inform the salesperson. Please initial in box provided.


CUSTOMER'S APPROVAL

DESIGN PROPERTY OF KERLEY SIGNS, INC.
 Not to be reproduced or photocopied without the expressed written consent of Kerley Signs, Inc. The use of this document for bidding purposes to other companies or if the design is reproduced in any form without permission from Kerley Signs, Inc. the customer will be required to pay for this design. Copyright © KERLEY SIGNS, INC. 2010




7650 Preston Drive, Landover, Md. 20785
 PH: (301) 773-6800 FAX: (301) 773-3465



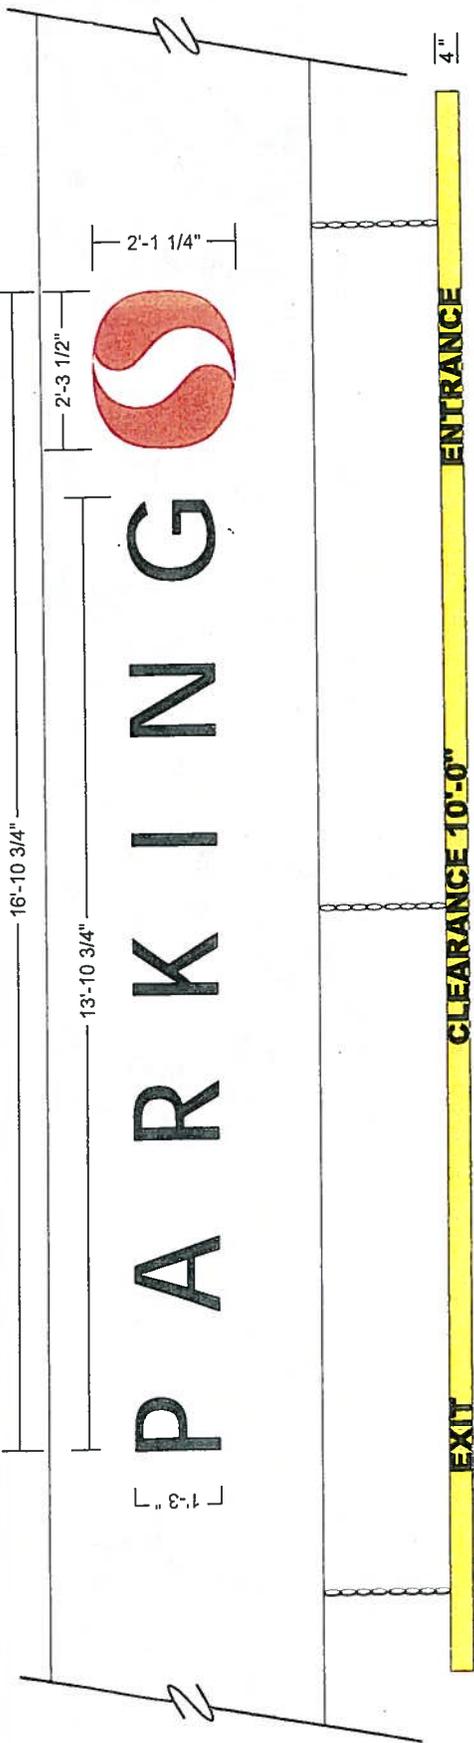

BACK LIT CHANNEL LETTERS W/ FACE LIT LOGO

① SAFEWAY PARKING HANGING SIGN
SCALE: 3/8" = 1'

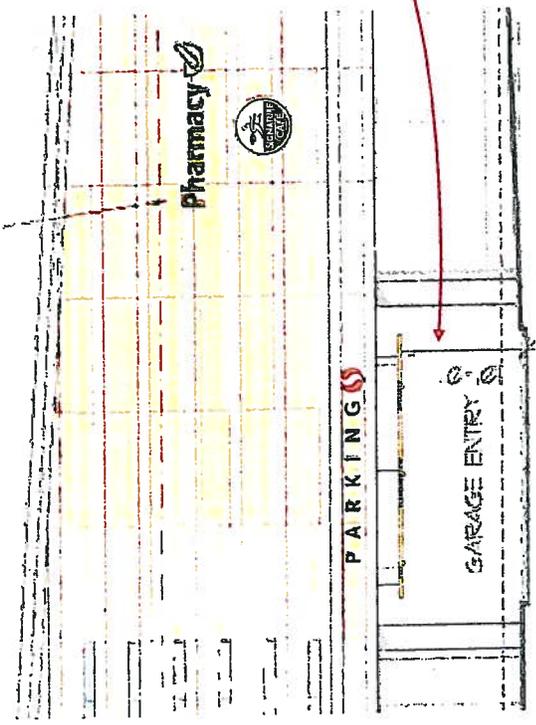

PLACE SIGN 10' FROM GROUND

① SAFEWAY - NORTH ELEVATION (PART 3)
SCALE: 1" = 16'

NOTE THAT COMPUTER GENERATED COLORS SHOWN ON THIS DRAWING ARE ONLY A REPRESENTATION. ACTUAL COLORS MAY VARY. IF EXACT MATCH IS NEEDED- PLEASE INFORM THE SALESPERSON.



Proposed New Signage For: SAFEWAY STORE #3250
Location: 3526 KING ST ALEXANDRIA, VA 22302

SALES REP: TRICIA RUST
DATE: 8-24-11
SCALE: AS NOTED

FILE NAME: Safeway_Alexandria
SKETCH# 00000
ARTIST: AK


COLORS USED: PMS 186 WHITE PMS 7508C PMS 7506C
 BLACK PMS 5C

CUSTOM COLOR MATCHING SAMPLES ON MOST COLORS AVAILABLE @ \$45.00 EACH


Proud Members Of:

7650 Preston Drive, Landover, Md. 20785
PH: (301) 773-6800 FAX: (301) 773-3465




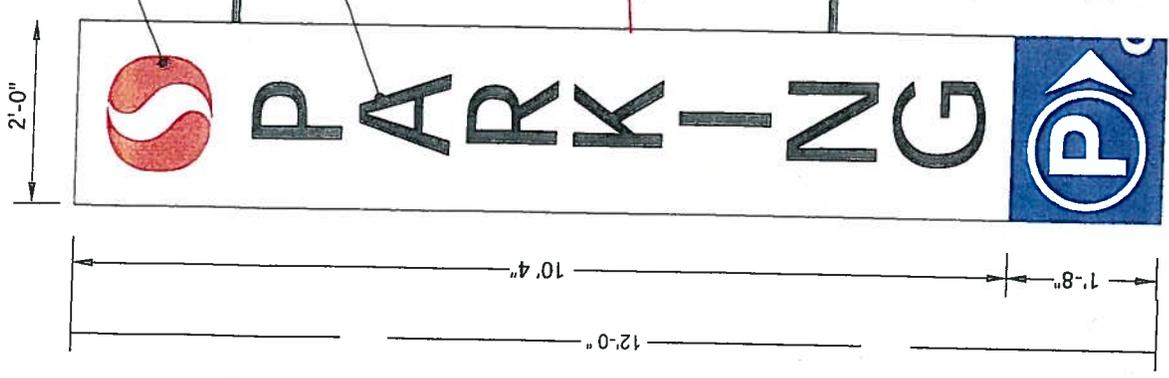

⑧ SAFEWAY PARKING GARAGE SIGN
SCALE: 1/2" = 1'

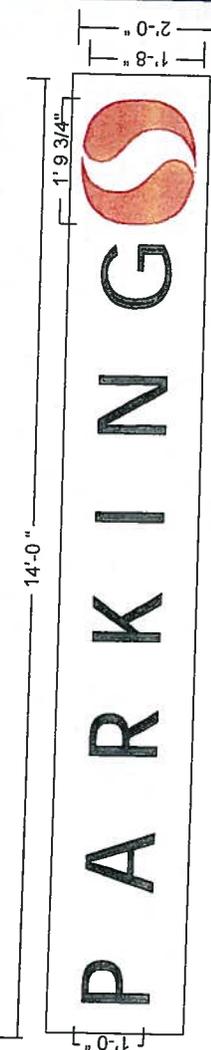

⑨ SAFEWAY PARKING SIGN
SCALE: 3/8" = 1'
BACK LIT CHANNEL LETTERS W/ FACE LIT LOGO ON A PAN SIGN

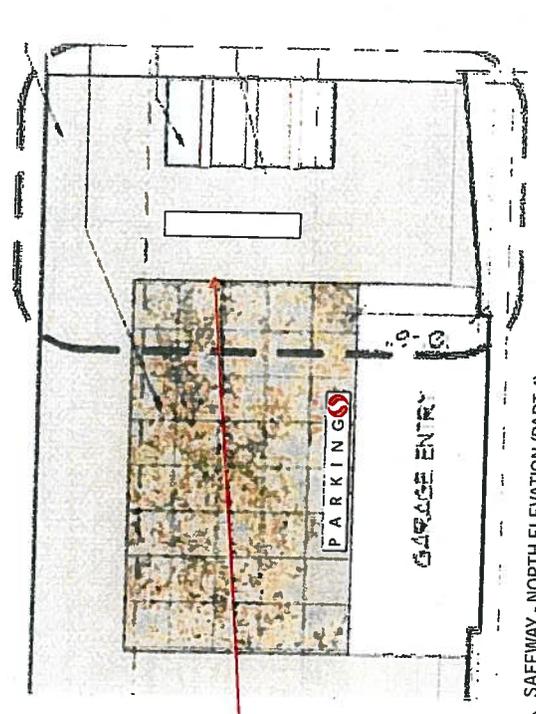

⑩ SAFEWAY - NORTH ELEVATION (PART 4)
SCALE: 1" = 16'

KERLEY SIGNS

7650 Preston Drive, Landover, Md 20785
Ph: 301-773-6800 • Fax: 301-773-3465

DESIGN PROPERTY OF KERLEY SIGNS, INC.
Not to be reproduced or photocopied without the expressed written consent of Kerley Signs, Inc.
The use of this document for bidding purposes to other companies or if the design is reproduced in any form without permission from Kerley Signs, Inc. the customer will be required to pay for this design.

Copyright © KERLEY SIGNS, INC. 2010

Customer must approve sketch prior to fabrication of sign. Customer is responsible for proofreading and checking copy for any and all spelling and grammatical errors. Kisil will not be responsible for these errors. Note that computer generated colors shown on this drawing are only a representation. Actual colors may vary. If exact match is needed, please notify salesperson. Please email in box provided. Signed copy must be returned to Kisil salesperson or mail or fax to office.
CUSTOMER'S APPROVAL

Proposed New Signage For:
SAFEWAY STORE #3250


3526 KING ST
ALEXANDRIA, VA 22302

Colors:
 PMS 186
 WHITE
 BLACK
 BLUE


CUSTOM COLOR MATCHING SAMPLES ON MOST COLORS AVAILABLE @ \$45.00 EACH

SALES REP: TRICIA RUST
DATE: 8-24-11
SCALE: AS NOTED
FILE NAME: Safeway_Alexandria
SKETCH# 00000
ARTIST: AK


NOTE THAT COMPUTER GENERATED COLORS SHOWN ON THIS DRAWING ARE ONLY A REPRESENTATION. ACTUAL COLORS MAY VARY. IF EXACT MATCH IS NEEDED- PLEASE INFORM THE SALESPERSON.

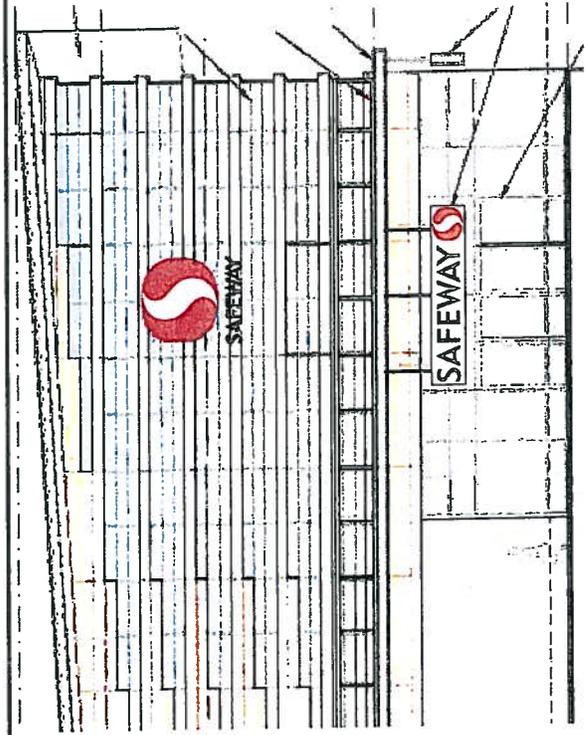

② SAFEWAY - EAST ELEVATION (PART 1)
SCALE: 1" = 16'

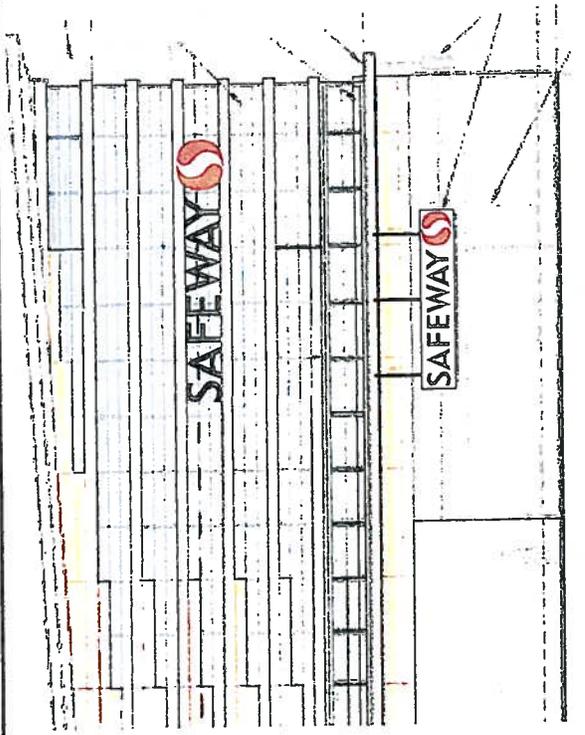

(CHOOSE ONE OPTION)

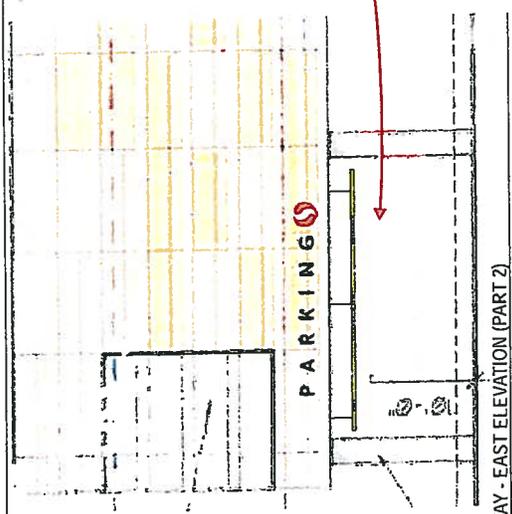


PLACE SIGN 10' FROM GROUND

② SAFEWAY - EAST ELEVATION (PART 2)
SCALE: 1" = 16'

NOTE THAT COMPUTER GENERATED COLORS SHOWN ON THIS DRAWING ARE ONLY A REPRESENTATION. ACTUAL COLORS MAY VARY. IF EXACT MATCH IS NEEDED- PLEASE INFORM THE SALESPERSON.


| | | | |
|--|--|--|---|
| Proposed New Signage For: SAFEWAY STORE #3250 Location: 3526 KING ST ALEXANDRIA, VA 22302 | | SALES REP: TRICIA RUST DATE: 8-24-11 SCALE: AS NOTED | |
| COLORS USED: <input type="checkbox"/> PMS 186 <input type="checkbox"/> WHITE <input type="checkbox"/> BLACK | | FILE NAME: Safeway_Alexandria SKETCH# 00000 ARTIST: AK | |
| CUSTOM COLOR MATCHING SAMPLES ON MOST COLORS AVAILABLE @ \$46.00 EACH | | | |
| Proud Members Of: | | | |
| | | | |
| CUSTOMER MUST APPROVE SKETCH PRIOR TO FABRICATION OF SIGN. CUSTOMER IS RESPONSIBLE FOR PROOFREADING AND CHECKING COPY FOR ANY AND ALL SPELLING AND GRAMMATICAL ERRORS. KSI WILL NOT BE RESPONSIBLE FOR THESE ERRORS. NOTE THAT COMPUTER GENERATED COLORS SHOWN ON THIS DRAWING ARE ONLY A REPRESENTATION. ACTUAL COLORS MAY VARY. IF EXACT MATCH IS NEEDED- PLEASE INFORM THE SALESPERSON. PLEASE INITIAL IN BOX PROVIDED. CUSTOMER'S APPROVAL | | | |
| DESIGN PROPERTY OF KERLEY SIGNS, INC. Not to be reproduced or photocopied without the expressed written consent of Kerley Signs, Inc. The use of this document for bidding purposes to other companies or if the design is reproduced in any form without permission from Kerley Signs, Inc. the customer will be required to pay for this design. Copyright © KERLEY SIGNS, INC. 2010 | | | |
| | | | 7650 Preston Drive, Landover, Md. 20785 PH: (301)773-6800 FAX: (301)773-3465 |

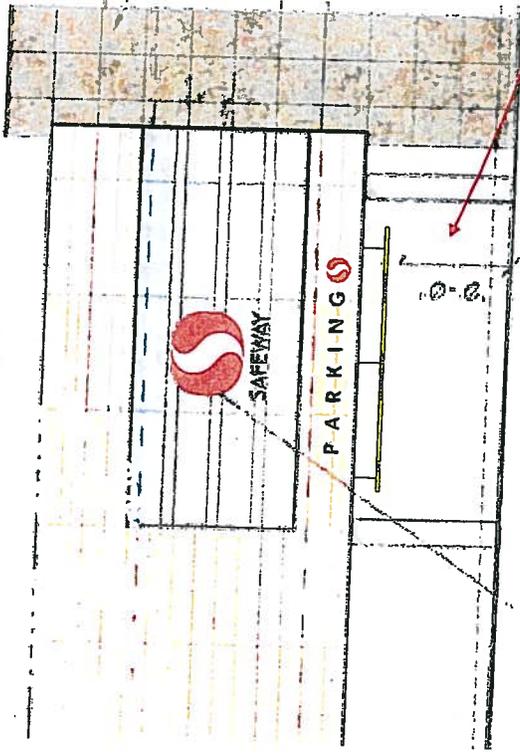


③ SAFEWAY - SOUTH ELEVATION (PART 1)
SCALE: 1" = 16'



PLACE SIGN 10' FROM GROUND
(CHOOSE ONE OPTION)

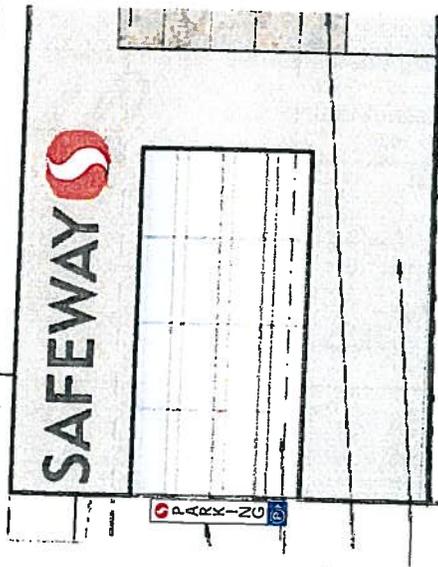

④ SAFEWAY - WEST ELEVATION (PART 1)
SCALE: 1" = 16'

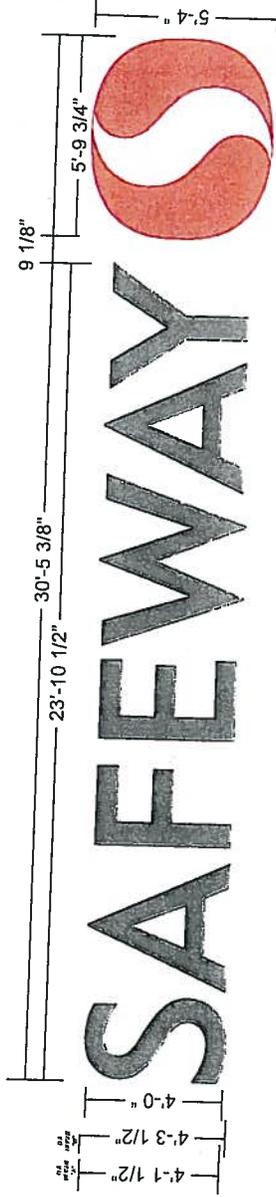

① SAFEWAY WEST VIEW SIGN
SCALE: 3/16" = 1'

HALO ILLUMINATED LETTERS & 'S' DIRECT ILLUMINATED CABINET

NOTE THAT COMPUTER GENERATED COLORS SHOWN ON THIS DRAWING ARE ONLY A REPRESENTATION. ACTUAL COLORS MAY VARY. IF EXACT MATCH IS NEEDED, PLEASE INFORM THE SALESPERSON.

Proposed New Signage For: **SAFEGWAY STORE #3250**
Location: 3526 KING ST ALEXANDRIA, VA 22302

COLORS USED: PMS 186 WHITE BLACK

CUSTOM COLOR MATCHING SAMPLES ON MOST COLORS AVAILABLE @ \$46.00 EACH

Proud Members Of:

| | |
|------------|--------------------|
| SALES REP: | TRICIA RUST |
| DATE: | 8-24-11 |
| SCALE: | AS NOTED |
| FILE NAME: | Safeway_Alexandria |
| SKETCH#: | 00000 |
| ARTIST: | AK |

Customer must approve sketch prior to fabrication of sign. Customer is responsible for proofreading and checking copy for any and all spelling and grammatical errors. KSI will not be responsible for these errors. Note that computer generated colors shown on this drawing are only a representation. Actual colors may vary. If exact match is needed, please inform the salesperson. Please initial in box provided.

CUSTOMER'S APPROVAL

DESIGN PROPERTY OF KERLEY SIGNS, INC.
Not to be reproduced or photocopied without the expressed written consent of Kerley Signs, Inc. The use of this document for bidding purposes to other companies or if the design is reproduced in any form without permission from Kerley Signs, Inc., the customer will be required to pay for this design. Copyright © KERLEY SIGNS, INC. 2010



7650 Preston Drive, Landover, Md. 20785
PH: (301) 773-6800 FAX: (301) 773-3465





APPLICATION

**PRELIMINARY
REVIEW**

SPECIAL USE PERMIT

SPECIAL USE PERMIT # 2011-0060

PROPERTY LOCATION: 3526 King Street

TAX MAP REFERENCE: 032.01-01-04 and 3915-03-01-01 **ZONE:** CG

APPLICANT:

Name: Safeway Inc., a Delaware Corporation

Address: 4551 Forbes Boulevard, Lanham, Maryland 20706

PROPOSED USE: Transportation Management Plan Special Use Permit.

THE UNDERSIGNED, hereby applies for a Special Use Permit in accordance with the provisions of Article XI, Section 4-11-500 of the 1992 Zoning Ordinance of the City of Alexandria, Virginia.

THE UNDERSIGNED, having obtained permission from the property owner, hereby grants permission to the City of Alexandria staff and Commission Members to visit, inspect, and photograph the building premises, land etc., connected with the application.

THE UNDERSIGNED, having obtained permission from the property owner, hereby grants permission to the City of Alexandria to post placard notice on the property for which this application is requested, pursuant to Article IV, Section 4-1404(D)(7) of the 1992 Zoning Ordinance of the City of Alexandria, Virginia.

THE UNDERSIGNED, hereby attests that all of the information herein provided and specifically including all surveys, drawings, etc., required to be furnished by the applicant are true, correct and accurate to the best of their knowledge and belief. The applicant is hereby notified that any written materials, drawings or illustrations submitted in support of this application and any specific oral representations made to the Director of Planning and Zoning on this application will be binding on the applicant unless those materials or representations are clearly stated to be non-binding or illustrative of general plans and intentions, subject to substantial revision, pursuant to Article XI, Section 11-207(A)(10), of the 1992 Zoning Ordinance of the City of Alexandria, Virginia.

Land, Clark, Carroll, Mendelson & Blair, P.C.
Duncan W. Blair, Esquire

Duncan W Blair 9/26/11
Signature Date

Print Name of Applicant or Agent

524 King Street
Mailing/Street Address

(703) 836-1000 (703) 549-3335
Telephone # Fax #

Alexandria, Virginia 22314
City and State Zip Code

dclair@landclark.com
Email address

| | |
|------------------------------------|--------------|
| ACTION PLANNING COMMISSION: | DATE: |
| ACTION CITY COUNCIL: | DATE: |

SUP # _____

PROPERTY OWNER'S AUTHORIZATION

As the property owner of 3526 King Street I hereby
(Property Address)
grant the applicant authorization to apply for the retail use as
(use)
described in this application.

Name: Avis Black

Phone (301) 918-8966

Please Print

Address: 4551 Forbes Boulevard, Lanham, MD 20706

Email: Avis.Black@safeway.com

Signature: *Avis Black*

Date: 8/25/11

1. Floor Plan and Plot Plan. As a part of this application, the applicant is required to submit a floor plan and plot or site plan with the parking layout of the proposed use. The SUP application checklist lists the requirements of the floor and site plans. The Planning Director may waive requirements for plan submission upon receipt of a written request which adequately justifies a waiver.

Required floor plan and plot/site plan attached. Not Applicable: See DSUP 2011-00015

Requesting a waiver. See attached written request.

2. The applicant is the (check one):

Owner

Contract Purchaser

Lessee or

Other: _____ of the subject property.

State the name, address and percent of ownership of any person or entity owning an interest in the applicant or owner, unless the entity is a corporation or partnership, in which case identify each owner of more than ten percent.

None. Safeway Inc., a Delaware corporation, is a publicly owned corporation traded on the New York Stock Exchange (SWY).

SUP # _____

USE CHARACTERISTICS

4. The proposed special use permit request is for (check one).
- a new use requiring a special use permit,
 - an expansion or change to an existing use without a special use permit,
 - an expansion or change to an existing use with a special use permit,
 - other. Please describe Transportation Management Plan Special Use Permit

5. Please describe the capacity of the proposed use:
- A. How many patrons, clients, pupils and other such users do you expect?
Specify time period (i.e., day, hour, or shift).
Not Applicable.
- B. How many employees, staff and other personnel do you expect?
Specify time period (i.e., day, hour, or shift).
Not Applicable.

6. Please describe the proposed hours and days of operation of the proposed use:
- | | |
|------------------------|--------|
| Day: | Hours: |
| <u>Not Applicable.</u> | |
| _____ | _____ |
| _____ | _____ |
| _____ | _____ |
| _____ | _____ |

7. Please describe any potential noise emanating from the proposed use.
- A. Describe the noise levels anticipated from all mechanical equipment and patrons
Not Applicable.
- B. How will the noise be controlled?
Not Applicable.

SUP # _____

8. Describe any potential odors emanating from the proposed use and plans to control them:

Not Applicable.

9. Please provide information regarding trash and litter generated by the use.

A. What type of trash and garbage will be generated by the use? (i.e. office paper, food wrappers)
Not Applicable.

B. How much trash and garbage will be generated by the use? (i.e. # of bags or pounds per day or per week)
Not Applicable.

C. How often will trash be collected?
Not Applicable.

D. How will you prevent littering on the property, streets and nearby properties?
Not Applicable.

10. Will any hazardous materials, as defined by the state or federal government, be handled, stored, or generated on the property?

Yes. No.

If yes, provide the name, monthly quantity, and specific disposal method below:
Not Applicable.

1

SUP # _____

11. Will any organic compounds, for example paint, ink, lacquer thinner, or cleaning or degreasing solvent, be handled, stored, or generated on the property?

Yes. No.

If yes, provide the name, monthly quantity, and specific disposal method below:

Not Applicable.

12. What methods are proposed to ensure the safety of nearby residents, employees and patrons?

Not Applicable.

ALCOHOL SALES

13.

A. Will the proposed use include the sale of beer, wine, or mixed drinks?

Yes No

If yes, describe existing (if applicable) and proposed alcohol sales below, including if the ABC license will include on-premises and/or off-premises sales.

Not Applicable.

SUP # _____

PARKING AND ACCESS REQUIREMENTS

14. A. How many parking spaces of each type are provided for the proposed use: Not Applicable.

- _____ Standard spaces
- _____ Compact spaces
- _____ Handicapped accessible spaces.
- _____ Other.

| |
|---|
| Planning and Zoning Staff Only Required number of spaces for use per Zoning Ordinance Section 8-200A _____ Does the application meet the requirement? <input type="checkbox"/> Yes <input type="checkbox"/> No |
|---|

B. Where is required parking located? (check one)

- on-site
- off-site

If the required parking will be located off-site, where will it be located?

PLEASE NOTE: Pursuant to Section 8-200 (C) of the Zoning Ordinance, commercial and industrial uses may provide off-site parking within 500 feet of the proposed use, provided that the off-site parking is located on land zoned for commercial or industrial uses. All other uses must provide parking on-site, except that off-street parking may be provided within 300 feet of the use with a special use permit.

C. If a reduction in the required parking is requested, pursuant to Section 8-100 (A) (4) or (5) of the Zoning Ordinance, complete the PARKING REDUCTION SUPPLEMENTAL APPLICATION.

Parking reduction requested; see attached supplemental form

15. Please provide information regarding loading and unloading facilities for the use:

A. How many loading spaces are available for the use? _____

| |
|--|
| Planning and Zoning Staff Only Required number of loading spaces for use per Zoning Ordinance Section 8-200 _____ Does the application meet the requirement? <input type="checkbox"/> Yes <input type="checkbox"/> No |
|--|

SUP # _____

- B. Where are off-street loading facilities located? Not Applicable.
- C. During what hours of the day do you expect loading/unloading operations to occur?
Not Applicable.
- D. How frequently are loading/unloading operations expected to occur, per day or per week, as appropriate?
Not Applicable.

16. Is street access to the subject property adequate or are any street improvements, such as a new turning lane, necessary to minimize impacts on traffic flow?
Not Applicable.

SITE CHARACTERISTICS

17. Will the proposed uses be located in an existing building? Yes No
 Do you propose to construct an addition to the building? Yes No
 How large will the addition be? _____ square feet.

18. What will the total area occupied by the proposed use be?
 _____ sq. ft. (existing) + _____ sq. ft. (addition if any) = _____ sq. ft. (total)

19. The proposed use is located in: (check one)
 a stand alone building
 a house located in a residential zone
 a warehouse
 a shopping center. Please provide name of the center: _____
 an office building. Please provide name of the building: _____
 other. Please describe: Transportation Management Plan SUP

End of Application

SUP # _____

OWNERSHIP AND DISCLOSURE STATEMENT
Use additional sheets if necessary

1. Applicant. State the name, address and percent of ownership of any person or entity owning an interest in the applicant, unless the entity is a corporation or partnership, in which case identify each owner of more than ten percent. The term ownership interest shall include any legal or equitable interest held at the time of the application in the real property which is the subject of the application.

| Name | Address | Percent of Ownership |
|---------|---------|----------------------|
| 1. None | | |
| 2. | | |
| 3. | | |

2. Property. State the name, address and percent of ownership of any person or entity owning an interest in the property located at 3526 King St. (address), unless the entity is a corporation or partnership, in which case identify each owner of more than ten percent. The term ownership interest shall include any legal or equitable interest held at the time of the application in the real property which is the subject of the application.

| Name | Address | Percent of Ownership |
|-----------------|---|----------------------|
| 1. Safeway Inc. | 4551 Forbes Boulevard Lanham, Maryland 20706 | 100% |
| 2. | | |
| 3. | | |

3. Business or Financial Relationships. Each person or entity listed above (1 and 2), with an ownership interest in the applicant or in the subject property is required to disclose any business or financial relationship, as defined by Section 11-350 of the Zoning Ordinance, existing at the time of this application, or within the 12-month period prior to the submission of this application with any member of the Alexandria City Council, Planning Commission, Board of Zoning Appeals or either Boards of Architectural Review.

| Name of person or entity | Relationship as defined by Section 11-350 of the Zoning Ordinance | Member of the Approving Body (i.e. City Council, Planning Commission, etc.) |
|--------------------------|---|---|
| 1. Safeway Inc. | None | Planning Commission and City Council |
| 2. | | |
| 3. | | |

NOTE: Business or financial relationships of the type described in Sec. 11-350 that arise after the filing of this application and before each public hearing must be disclosed prior to the public hearings.

As the applicant or the applicant's authorized agent, I hereby attest to the best of my ability that the information provided above is true and correct.

8/22/11
Date

Duncan W. Blair, Esquire
Printed Name

[Handwritten Signature]
Signature

Kendra Jacobs

Subject: FW: COA Contact Us: Lifestyle Safeway at Bradlee

From: William Cockrell [<mailto:wccac@gmail.com>]
Sent: Monday, September 26, 2011 1:11 PM
To: PnZFeedback; Cicely Woodrow; Graciela Moreno
Subject: COA Contact Us: Lifestyle Safeway at Bradlee

COA Contact Us: Planning and Zoning General Feedback

Time: [Mon Sep 26, 2011 13:11:02] Message ID: [33430]

Issue Type: Planning and Zoning General Feedback
First Name: William
Last Name: Cockrell
Street Address: 3638 Duke Street
City: Alexandria
State: VA
Zip: 22304
Phone: 703-370-9095
Email Address: wccac@gmail.com
Subject: Lifestyle Safeway at Bradlee
As a retired Safeway District Manager, I am completely in favor of
replacing the current store with the
Comments: proposed "Lifestyle" store.
The new store can better serve the community and the proposed plan will
serve to enhance the corner of King & Braddock Roads.

Kendra Jacobs

Subject: FW: COA Contact Us: Bradlee "Lifestyle" Safeway

From: Anne Cockrell [<mailto:wccac@comcast.net>]
Sent: Monday, September 26, 2011 12:50 PM
To: PnZFeedback; Cicely Woodrow; Graciela Moreno
Subject: COA Contact Us: Bradlee "Lifestyle" Safeway

COA Contact Us: Planning and Zoning General Feedback

Time: [Mon Sep 26, 2011 12:49:39] Message ID: [33426]

Issue Type: Planning and Zoning General Feedback
First Name: Anne
Last Name: Cockrell
Street Address: 3638 Duke Street
City: Alexandria
State: Virginia
Zip: 22304
Phone: 7033709095
Email Address: wccac@comcast.net
Subject: Bradlee "Lifestyle" Safeway
I'm writing to voice my support for the proposed Bradlee
"Lifestyle" Safeway. The current store is long past
due for a
Comments: replacement and the citizens of Alexandria who shop at that store deserve
a
new store

Kendra Jacobs

Subject: FW: COA Contact Us: Bradlee Safeway

From: Vernon Cockrell [<mailto:vernon29@group226.com>]

Sent: Monday, September 26, 2011 12:52 PM

To: PnZFeedback; Cicely Woodrow; Graciela Moreno

Subject: COA Contact Us: Bradlee Safeway

COA Contact Us: Planning and Zoning General Feedback

Time: [Mon Sep 26, 2011 12:52:19] Message ID: [33428]

Issue Type: Planning and Zoning General Feedback

First Name: Vernon

Last Name: Cockrell

Street Address: 29 Cockrell Street

City: Alexandria

State: VA

Zip: 22304

Phone: 703-370-1421

Email Address: vernon29@group226.com

Subject: Bradlee Safeway

Comments: I'm in favor of the proposed Lifestyle Safeway at Bradlee. I'm a long time customer and the pharmacy personnel are the best

Kendra Jacobs

Subject: FW: COA Contact Us: Safeway at Bradelee Center

From: April O'Reilly [<mailto:ascatalano@yahoo.com>]

Sent: Monday, October 03, 2011 12:44 PM

To: William Euille; Frank Fannon; Kerry Donley; Alicia Hughes; Del Pepper; Paul Smedberg; Rose Boyd; Jackie Henderson; Elaine Scott; Rob Krupicka; Linda Owens; Elizabeth Jones

Subject: COA Contact Us: Safeway at Bradelee Center

COA Contact Us: Mayor, Vice Mayor, and Council Members

Time: [Mon Oct 03, 2011 12:43:45] Message ID: [33600]

Issue Type: Mayor, Vice Mayor, and Council Members

First Name: April

Last Name: O'Reilly

Street Address: 1721 Dogwood Dr

City: alexandria

State: VA

Zip: 22302

Phone:

Email Address: ascatalano@yahoo.com

Subject: Safeway at Bradelee Center

To whom it may concern:

I am unable to attend the community meeting on

October 6th, but wanted to express my support for the proposed remodel of

the Safeway in Bradelee Center. I'm a local resident and primarily shop at

that Safeway. The store in its current building is an eyesore compared to

the other establishments in the shopping center. It also no longer

supports the needs of our ever-growing community. The store needs to be

Comments: expanded in size and service offerings- it is a good store, but is often

over-crowded with long lines, the aisles are crowded, and it does not fit

the image that our community is proud of. The store is older, crowded, and

run down. Updating the store will not only improve its appearance in the

community, but also provide a store that's on par with other neighborhood

grocery stores such as the Harris Teeter in Shirlington.

Thank you for

your time.

The O'Reilly family

111

Kendra Jacobs

Subject: FW: COA Contact Us: New "lifestyle" Safeway

From: Craig Miller [mailto:pavlovs_cat@hotmail.com]

Sent: Sunday, October 09, 2011 3:47 PM

To: PnZFeedback; Cicely Woodrow; Graciela Moreno

Subject: COA Contact Us: New "lifestyle" Safeway

COA Contact Us: Planning and Zoning General Feedback

Time: [Sun Oct 09, 2011 15:47:17] Message ID: [33799]

Issue Type: Planning and Zoning General Feedback
First Name: Craig
Last Name: Miller
Street Address: 826 West Braddock Road
City: Alexandria
State: Virginia
Zip: 22302
Phone: 7036269683
Email Address: pavlovs_cat@hotmail.com
Subject: New "lifestyle" Safeway

I am writing in regard to the proposed new Safeway grocery store at the intersection of Quaker Lane, Braddock, and King Street. I am my family all enthusiastically endorse this proposal. There are two grocery stores in the area, but both are older and small. They are no longer competitive with the quality grocery stores in other areas, like the Harris Teeters on Duke Street and Route 1. Due to simple physical limitations they cannot offer the variety, particularly in the areas of fresh fish, vegetables, and meats. As a result, we find ourselves having to travel beyond our neighborhood for our principal grocery shopping. This store would be convenient, and reduce our need to travel. More than that, the additional retail space would provide the opportunity for new and interesting local services. Again, we support this proposal. Thanks for your time and consideration.

NEW BRADLEE "LIFESTYLE" SAFEWAY

Safeway is requesting a Development Special Use Permit with Site Plan from the City of Alexandria to redevelop the existing Bradlee Safeway to a new "Lifestyle" Safeway.

Please put me on your email list to be notified of upcoming public meetings regarding this project.

| PRINTED NAME | EMAIL ADDRESS | COMMENTS |
|----------------------|----------------------------|--------------------|
| JERALD P COHEN | JPCOHEN@comcast.net | |
| Tom Chorman | tomchorman@gmail.com | |
| Ames Cockrell | wdecae@gmail.com | |
| Lewis BUSCH | lewisbusch@comcast.net | |
| Richard Vanderhoeven | vdhoeven@comcast.net | |
| Gary R. Burns | uvaburns@verizon.net | Long overdue |
| Gemmarose Burns | π | |
| Lisa Carriean | | |
| Jon Scheinbart | | |
| Matt Giobbi | mggiobbi@yahoo.com | Go, go, go! |
| Frank Regan | FRANK40@aol.com | |
| ANTHONY DRESDEN | | GREAT! |
| Kathleen McLaughlin | kfm@dmggroup.com | |
| J. Cummins | jccconsulting@comcast.net | |
| Tom Downs | tdowns@ast.com | |
| Ed Donofree | ED.DONOFREE@THE-DSPKAT.COM | |
| Pam DeCandido | pdecand@hotmail.com | |
| SALLY LEVY | | HURRY!! |
| Brian North | | Yesterday, please! |
| Beth Resetco | bresetco@wdgarch.com | |

Docket Item #4 A-D
Master Plan Amendment #2011-0007
Rezoning #2011-0001
Development Special Use Permit #2011-0015
Special Use Permit/Transportation Management
Plan #2011-0060

From: James Campbell [<mailto:james.p.campbell@gmail.com>]
Sent: Wednesday, September 28, 2011 9:41 PM
To: Colleen Willger; Patricia Escher; Garry Meus
Cc: Lauren Campbell
Subject: King & Quaker Safeway Support

Hello!

I understand you are the Alexandria staff members who are gathering information about the proposed changes for a "Lifestyle Safeway" to replace the current store at the intersection of King St and Quaker Lane.

As nearby residents, we are excited to support the idea of an updated store that will provide more shopping options and a cleaner, more modern store front (I'm just sayin... :)).

Thanks for tackling this sort of thing to ensure growth goes well in Alexandria. We love our neighborhood!

James and Lauren Campbell

The North Ridge Citizens' Association

A Non-Profit Organization
PO BOX 3242 ALEXANDRIA, VA 22302-0242

October 13, 2011

John Komoroske, Chairman
Alexandria Planning Commission
301 King Street, Room 2100
Alexandria, Virginia 22314

Re: Dkt. No. 7, 3526 King Street Safeway (Nov. 1, 2011)

Dear Chairman Komoroske and Members of the Commission:

The North Ridge Citizens' Association welcomes this opportunity to express its views on the above-referenced matter to be considered by the Commission on November 1st. The Executive Board of NRCA, at its regularly scheduled September 2011 meeting, received a presentation on the proposal from Safeway, and voted at its October meeting to recommend approval of Safeway's plan to redevelop its King Street store. The basis for NRCA's support is briefly outlined below.

First, we embrace the idea of a larger, modernized store that also incorporates an increase in parking spaces. We see this substantial investment by Safeway in our community as a very significant vote of market confidence in North Ridge and the other communities that Safeway serves from this location.

Second, while the redevelopment plan means the new store will be a substantial increase over the mass and bulk of the old one, this can be accomplished without adverse impact on any nearby residential area or residential street. In this respect, we endorse the concern expressed by residents of the Fairlington community (across King Street) that Safeway ensure that the new, two-story store is well-screened from them by the planting of new trees. We are confident that staff will ensure that this concern is properly addressed in its recommended conditions.

Third, we remain skeptical of the notion that parking areas within the footprint of a building not count toward the FAR maximum, and thus voice our support for the existing approach of the Zoning Ordinance in this respect, which properly considers Safeway's proposed new store as having an FAR of 1.0. Hence, changing the zoning of the land, not the text of the Ordinance, is the correct approach to the twin goals of more store and more parking. Further, limiting the zoning change by proffer to this particular redevelopment ensures that the change will not be misused to achieve a result not desired by the community. In other words, the proffered zoning approach is probably the only way in which NRCA would offer its full endorsement to this project.

116

Fourth, we support the shift of the loading dock from the King Street side to the Braddock Road side of the store. The new loading/unloading plan for tractor-trailers appears feasible, both in relation to existing streets and surface parking. The change allows Safeway to enliven the King Street side of the store in a way that will enhance the experience of retail shopping in the Bradlee area generally. We are well aware that there has been much community concern about possible additional impact on residential streets from tractor-trailer traffic, but we are confident that the staff is aware of this concern and we expect it to be fully addressed either in staff conditions or as a result of the Commission hearing. It does not appear, in any event, to be a problem that should preclude favorable action on the Safeway proposal.

Finally, we are aware that plans are in the works for a more comprehensive discussion of the long-standing problems of the congested King-Braddock-Quaker intersection in the near term. North Ridge will welcome the opportunity to participate in those discussions, and we expect Safeway to be there as well. In the meantime, however, we do not view the possibility of future changes at this multi-road intersection to be a bar to action on the Safeway proposal at this time. Whether it is appropriate for the approval conditions to in any way anticipate this future is a matter we leave to the sound judgment of the Commission.

I will attend the hearing on this matter to respond to any questions the Commission may have about NRCA's position. Thank you for this opportunity to state our views.

Sincerely,



David W. Brown
Zoning Committee Chair

City of Alexandria, Virginia

MEMORANDUM

DATE: NOVEMBER 1, 2011

TO: CHAIRMAN KOMOROSKE AND MEMBERS OF THE PLANNING COMMISSION

FROM: FAROLL HAMER, DIRECTOR,
DEPARTMENT OF PLANNING AND ZONING

SUBJECT: DSUP #2011-0015 – SAFEWAY ON KING STREET – PROPOSED REVISION TO DSUP CONDITIONS #3c AND #26

Upon further review, staff is recommending the following changes to Condition # 3c and Condition #26 of the recommended conditions for the Safeway on King Street application. The change to #3c is being recommended in order to better coordinate with adjacent property owners on pedestrian and safety improvements. The change to #26 is being recommended to provide some flexibility for the proposed signage. The specific changes are the following (added language is underlined, deleted language is ~~stricken~~):

- 3c. Conversion of the intersection of the King Street Service Road and the Bradlee Shopping Center Driveway from flashing operation to full-color (red/yellow/green) signalized operation. The City will coordinate with the adjacent property owners, no later than 120 days prior to implementation of the improvement, to review the analysis supporting the improvement as well as potential alternatives or adjustments to the improvement that will address both pedestrian safety and vehicular movement at the intersection. (T&ES)
26. Internally illuminated signs are prohibited, except for the five Safeway logo signs on the building facades which may be internally illuminated, with the final design to be reviewed and approved by the Director of P&Z. Explore the use of exterior illumination for all other signs. (P&Z)

Planning Commission
City of Alexandria, Virginia

Tuesday, November 1, 2011

Regular Public Hearing

4A-D. MASTER PLAN AMENDMENT #2011-0007, REZONING #2011-0002, DEVELOPMENT SPECIAL
USE PERMIT #2011-0015, TMP SPECIAL USE PERMIT #2011-0060,
3526 KING STREET - SAFEWAY ON KING

Comments of Nancy R. Jennings
President, Seminary Hill Association, Inc.

Members of the Planning Commission:

My name is Nancy Jennings, and I live at 2115 Marlboro Drive. I am President of Seminary Hill Association, Inc., and speak tonight on its behalf.

This Safeway store sits in a prominent place among entrances to Alexandria and on historical land—Menokin—that was once owned by Cassius Lee and often visited by Robert E. Lee. On one side across King Street is the Fairlington National Historic Register Site and on the other side across West Braddock Road is The Episcopal High School that was founded in 1839. When Seminary Hill residents were first introduced to this project in June, the Safeway representative, its legal counsel, and the architect assured us that the new bigger Safeway would fit in architecturally with the neighborhoods and that they would work with us about any concerns. The applicant has failed to do either of these.

Since that first meeting, some Seminary Hill residents have attended as many public meetings about the project as possible to get information and discuss our concerns. The Board of Directors of Seminary Hill held two special meetings about this project in August and October. I personally have requested information four different times without getting it. As a result, on October 26, 2011, the Board of Directors of Seminary Hill passed a motion that:

The Seminary Hill Association, Inc., opposes the rezoning of the Bradlee Safeway store as now proposed as a 'Big Box' store for a number of reasons including the delivery truck service route, the parking reduction, the increase in FAR, and the mass and scale of the project.

Thank you.

Cicely Woodrow

DSUP 2011-0015
MPA 2011-0007
REZ 2011-0001
TMP SUP 2011-0060

From: Gillie Campbell <mseltzgw@comast.net>
Sent: Wednesday, November 09, 2011 8:36 PM
To: PnZFeedback; Cicely Woodrow; Graciela Moreno
Subject: COA Contact Us: Safeway at Bradlee
Attachments: ATT00001.txt

COA Contact Us: Planning and Zoning General Feedback

Time: [Wed Nov 09, 2011 20:35:59] Message ID: [34616]

Issue Type: Planning and Zoning General Feedback
First Name: Gillie
Last Name: Campbell
Street Address: 409 Hanson Lane
City: Alexandria
State: VA
Zip: 22302
Phone: 7035487752
Email Address: mseltzgw@comast.net
Subject: Safeway at Bradlee
Comments: I support the plan to renovate and improve Safeway at Bradlee.

Julie Fuerth

From: Jackie Henderson
Sent: Monday, December 05, 2011 8:11 AM
To: Julie Fuerth
Subject: FW: COA Contact Us: Bradlee Safeway
Attachments: ATT00002.txt

From: Andrew Unger [<mailto:ungram@comcast.net>]
Sent: Monday, December 05, 2011 7:44 AM
To: William Euille; Frank Fannon; Kerry Donley; Alicia Hughes; Del Pepper; Paul Smedberg; Rose Boyd; Jackie Henderson; Rob Krupicka; Linda Owens; Elizabeth Jones
Subject: COA Contact Us: Bradlee Safeway

COA Contact Us: Mayor, Vice Mayor, and Council Members

Time: [Mon Dec 05, 2011 07:43:36] Message ID: [35098]

Issue Type: Mayor, Vice Mayor, and Council Members
First Name: Andrew
Last Name: Unger
Street Address: 3333 Martha Custis Drive
City: Alexandria
State: VA
Zip: 22302
Phone: 703 998-7179
Email Address: ungram@comcast.net
Subject: Bradlee Safeway

I am writing briefly to express my support for Safeway's plans for its new store at Bradlee. When I first heard about it during the summer and learned that it would have similarity to the new Safeway on Wisconsin Avenue above Georgetown I visited that store. Using the garage there was easy and didn't seem to cause undue traffic disturbance. The store had much more to offer than our present Safeway. I look forward to 2013 when the new, expanded and improved Safeway reopens.

Julie Fuerth

From: Jackie Henderson
Sent: Monday, December 05, 2011 7:40 AM
To: Julie Fuerth
Subject: FW: COA Contact Us: Proposed New Safeway Store
Attachments: ATT00001.txt

From: Christine Howell [<mailto:ibsct415@aol.com>]
Sent: Sunday, December 04, 2011 11:31 PM
To: William Euille; Frank Fannon; Kerry Donley; Alicia Hughes; Del Pepper; Paul Smedberg; Rose Boyd; Jackie Henderson; Rob Krupicka; Linda Owens; Elizabeth Jones
Subject: COA Contact Us: Proposed New Safeway Store

COA Contact Us: Mayor, Vice Mayor, and Council Members

Time: [Sun Dec 04, 2011 23:31:05] Message ID: [35096]

Issue Type: Mayor, Vice Mayor, and Council Members
First Name: Christine
Last Name: Howell
Street Address: 415 Timber Branch Parkway
City: Alexandria
State: VA
Zip: 22302
Phone: 703-409-6629
Email Address: ibsct415@aol.com
Subject: Proposed New Safeway Store
I would like to express my support for the new Safeway Store to be
Comments: constructed at the Bradlee Shopping Center.
It will be a great asset for
the community.

Julie Fuerth

From: Jackie Henderson
Sent: Monday, December 05, 2011 7:40 AM
To: Julie Fuerth
Subject: FW: COA Contact Us: Support to new Lifestyle Safeway
Attachments: ATT00001.txt

From: Sarah Belles [<mailto:sarah.pawley@gmail.com>]
Sent: Sunday, December 04, 2011 9:27 PM
To: William Euille; Frank Fannon; Kerry Donley; Alicia Hughes; Del Pepper; Paul Smedberg; Rose Boyd; Jackie Henderson; Rob Krupicka; Linda Owens; Elizabeth Jones
Subject: COA Contact Us: Support to new Lifestyle Safeway

COA Contact Us: Mayor, Vice Mayor, and Council Members

Time: [Sun Dec 04, 2011 21:26:44] Message ID: [35095]

Issue Type: Mayor, Vice Mayor, and Council Members
First Name: Sarah
Last Name: Belles
Street Address:
 City: Alexandria
 State: VA
 Zip: 22311
 Phone: 7035661899
Email Address: sarah.pawley@gmail.com
Subject: Support to new Lifestyle Safeway
I am writing to provide my support for the new Bradlee
"Lifestyle" Safeway. This project would offer a first
class
grocery store in the neighborhood which currently only has run down
options
(Giant, Magruders,
Comments: Safeway). This project would significantly improve the
quality of the neighborhood and likely increase
property values.
My
husband and I fully support this initiative.
Thank you,
Sarah Belles

Julie Fuerth

Docket Item #5 A-D
MPA #2011-0007
REZ #2011-0001
DSUP #2011-0015
SUP/TMP #2011-0060

From: Jackie Henderson
Sent: Monday, December 05, 2011 7:40 AM
To: Julie Fuerth
Subject: FW: COA Contact Us: New Safeway
Attachments: ATT00002.txt

From: Susan Browning [<mailto:sbrowning23@comcast.net>]
Sent: Sunday, December 04, 2011 3:18 PM
To: William Euille; Frank Fannon; Kerry Donley; Alicia Hughes; Del Pepper; Paul Smedberg; Rose Boyd; Jackie Henderson; Rob Krupicka; Linda Owens; Elizabeth Jones
Subject: COA Contact Us: New Safeway

COA Contact Us: Mayor, Vice Mayor, and Council Members

Time: [Sun Dec 04, 2011 15:17:30] Message ID: [35093]

Issue Type: Mayor, Vice Mayor, and Council Members
First Name: Susan
Last Name: Browning
Street Address: 800 Hermitage Court
City: Alexandria
State: VA
Zip: 22302
Phone: 703-548-9046
Email Address: sbrowning23@comcast.net
Subject: New Safeway
I support the plans for the new Safeway at King and Braddock. This store is
in desperate need of an overhaul
and if this doesn't happen it will
Comments: surely die. That would be a loss to the neighborhood. Make sure you put a
lot
of trees or you will have one particular community activist after
you. Good luck.

Docket Item #5 A-D
MPA #2011-0007
REZ #2011-0001
DSUP #2011-0015
SUP/TMP #2011-0060

Julie Fuerth

From: Jackie Henderson
Sent: Monday, December 05, 2011 7:39 AM
To: Julie Fuerth
Subject: FW: Support of the Renovation of Safeway at Quaker Lane and Braddock Road

From: jbarn54015@aol.com [<mailto:jbarn54015@aol.com>]
Sent: Saturday, December 03, 2011 9:35 PM
To: Jackie Henderson
Subject: Support of the Renovation of Safeway at Quaker Lane and Braddock Road

To the Mayor and Members of City Council:

Please support the renovation of the Bradlee Safeway at Quaker Lane and Braddock Road. I live at 1101 N. Howard Street in the Seminary Hill area. I have attended meetings to support the renovation because I believe an improved Safeway will be an asset to our neighborhood.

Thank you,

Janet Barnett

Julie Fuerth

From: Jackie Henderson
Sent: Monday, December 05, 2011 7:38 AM
To: Julie Fuerth
Subject: FW: COA Contact Us: SUPPORT BRADLEE LIFESTYLE SAFEWAY
Attachments: ATT00001.txt

From: James Wetherly [<mailto:jameswetherly@comcast.net>]
Sent: Saturday, December 03, 2011 2:18 PM
To: William Euille; Frank Fannon; Kerry Donley; Alicia Hughes; Del Pepper; Paul Smedberg; Rose Boyd; Jackie Henderson; Rob Krupicka; Linda Owens; Elizabeth Jones
Subject: COA Contact Us: SUPPORT BRADLEE LIFESTYLE SAFEWAY

COA Contact Us: Mayor, Vice Mayor, and Council Members

Time: [Sat Dec 03, 2011 14:17:50] Message ID: [35085]

Issue Type: Mayor, Vice Mayor, and Council Members
First Name: James
Last Name: Wetherly
Street Address: 112 Sylvan Ct
City: Alexandria
State: VA
Zip: 22304
Phone: 7038360796
Email Address: jameswetherly@comcast.net
Subject: SUPPORT BRADLEE LIFESTYLE SAFEWAY
Dear Sirs:

I am writing to express my support for the Bradlee Lifestyle Safeway. The Bradlee shopping center is an essential component of this neighborhood. Upgrading the Safeway will improve the quality of life and well-being for the community.

Alexandria is in dire need for

Comments: modernization - especially when it comes down to improving the quality and capacity of grocery shopping in this area.

Please let's not pass up an opportunity for Safeway to invest in our community.

Thanks,

JW

NEW BRADLEE "LIFESTYLE" SAFEWAY

To the Alexandria Planning Commission and Alexandria City Council:

Please vote to approve the new Bradlee "Lifestyle" Safeway:

| PRINTED NAME | Address | COMMENTS |
|-------------------|------------------------------------|--|
| Chris Fields | 5015 Knickerbocker Dr. Alex, VA | Love the new store!! |
| Jeffrey Saunders | 3100 Martha Custis Dr | |
| Kimberly Barton | | Looks great! |
| Kathy Scully | 4800 Fillmore Ave. | Approve?? Too long closed |
| Judith Votan | 4600 S. Four Mile Station | We NEED this!!! |
| Betsy Faga | 2918 S. Buchanan | |
| Carly Fubler | 1200 Quincy St | YES |
| Julie Mienzen | 1510 Woodbine St | Make sure there's a nice public rest room! |
| Brian Slusark | 2928 S Woodstock | |
| Marie Lennon | 744 Hurtha St. | |
| Aaron Va Gentoli | 3001 Park Center Dr. | Hi |
| Richard W. Tucker | 4651 Kinsey Lane | Looking forward to it! |
| Thomas W. Hesse | 1716 Kinross Dr | |
| Phillip Loskados | 1215 Janney Lane | Terrific; Overdue! |
| Elise Brown | 209 Central Ave | |
| Mike Yamat | 3940 Ruth Worth Ave | Excellent! |
| Lori Strauss | 1764 Dogwood Dr. | Yes! |
| Wendy A. Koucl | 5013 Domain Pl Alexandria, Va | |
| Mania Bruce | 3712 King St. | Would need a new, larger store |
| Deborah Williams | 1385 N. Van Dorn | Bring It on!! |
| Kelly Gambrett | 6 E Oxford Ave Alex | Great! |
| Linda Greenham | 209 Skyhill Rd Alex, VA 22314 | We need a larger store for convenience |

NEW BRADLEE "LIFESTYLE" SAFEWAY

To the Alexandria Planning Commission and Alexandria City Council:

Please vote to approve the new Bradlee "Lifestyle" Safeway:

| PRINTED NAME | Address | COMMENTS |
|-----------------------|---|-------------------------|
| May Elizabeth Freeman | 4233 So 36th St Arlington Va | ✓ Votes yes |
| Rob Treadwell | 3052 S. Buchanan St #12 Arlington VA 22206 | YAY! |
| SUSAN SMITH | P.O. Box 10013 | |
| Alex Murray | 1716 Crestwood Dr 22302 | Yes |
| Augustine Drew-Smith | 24 N. Donaldson St 22304 | Yes |
| Rannic E. Smith SR | " " " " | Yes |
| Andrea Mackey | 1033 Woods Rd Alex, VA 22302 | Hurry and do it please! |
| Donald Daugherty | 2621 N. Van Dorn Alex | Great! |
| Patricia Bremnell | 5214 Maris Alex 22301 | |
| May Ann Trout | 3506 Cameron Mills 22305 | Great |
| MARY ELLEN FLYNN | 3437-A S. Stafford St. ARL- VA 22206 | |
| Michelle Hogan | 1027 Woods Pl | |
| Alex Sweeney | 1504 Oakcrest Dr. | Alex. VA 22302 |
| Cara Heniff | 2701 Park Ct # 31401 | " " " |
| Yanett Cuellar | 2500 N. Van Dorn St #301. | " " " |
| Christy Higgin | 3207 Valley Dr. | |
| Catherine Warner | 1200 Key Dr | Yay! |
| Gary Onorio | 4703 31st St South ARL VA | Yay! |
| Paula Moran | 3000 M. S. St | NT |
| EAMON DAROOGAR | 4616 B 36th St S, Arlington | Can't wait |
| Kenneth Buckler | 3829 Lyalls Ave Alex. | |
| Annie Lee Dault | 805 Bannock, Alex 22341 | |
| Hana Norman | 177 Martin Ln. | Yeah! Hurry! |
| Whitney Wilson | 200 S. Van Dorn St #A308 | " " |

NEW BRADLEE "LIFESTYLE" SAFEWAY

To the Alexandria Planning Commission and Alexandria City Council:

Please vote to approve the new Bradlee "Lifestyle" Safeway:

| PRINTED NAME | Address | COMMENTS |
|------------------|-------------------------|------------------------|
| James Lage | 606 S Union Ter, Alex | |
| ANDREA GIBBONS | 3346 S. WAKEFIELD | |
| Carole Huzella | 4380 King St. | |
| Donna Lefevre | 1701 Maple Hill Pl. | |
| Monica Edelstein | 33 Rosemont Ave | |
| Tammy Lucas | 7528 Boston Court | |
| Sandra Woodhall | 6720 Bowie Dr. | Great Idea! |
| Alice Boretz | 22 E. Chapman St | |
| Carleen Farley | 411 Summers Dr. | Good! |
| Karen Bastow | 3248 S Utah St | Karen Bastow |
| Buck Armstrong | 1200 North Quarter Lane | SWEET! |
| Michael Wilko | 2904 Landover St | Looks nice |
| Butt KRALI | 4906 71st St #B2 | EXCITED |
| GLOTT KYNELLY | 4906 71st St #B2 | EXCITED |
| Zensig Jacks | 221 Norman Dr | Good Idea |
| Sam Lam | 2800 Dordman Dr | ✓ |
| Adam W. Rengers | 1200 N. Quaker Ln | Great!! |
| Gloria Finch | 2713 Taylor Ave | |
| Joyce Carrek | 903 Eldon Dr. | Yea! |
| Ana Guerrero | 100 - N. Gordon St | Great |
| Leah Menik | 358 King St, Alex Va. | All for the new STORE! |
| A. Sajatnik | 1225 Mount. Court A10X | |
| Christine Chen | 6920 Edgall Rd VA | |
| ROGER HIPPI | 4754 W BRADDOCK RD | |

NEW BRADLEE "LIFESTYLE" SAFEWAY

To the Alexandria Planning Commission and Alexandria City Council:

Please vote to approve the new Bradlee "Lifestyle" Safeway:

| PRINTED NAME | Address | COMMENTS |
|------------------|--|------------------------|
| Arnold V. Hodges | 1561 Mid Eagle Way Va | as it |
| Bob MAXSON | 4658 Kinsey Ln | Great! |
| Kevin Bull | 2751 Park Center Dr. | Good Idea! |
| Marianne Hill | 399 Piedmont St | |
| Janie Rhoads | 2404 Page Terrace, Alex. | Yes |
| B E Reynolds | 4205 Seminary Rd | OK |
| Kay Hudson | 2401 West St | Great! |
| N H N. ABBEY | 477 N. Armistead St #11 VA 22312 | YES |
| CHRIS PEGIBER | 4151 BRENMAUR PARK DR | LOOKS GREAT |
| Dorothy Valerie | 2500 N ST Vandover ^{ST #1011} | |
| Jill Heileman | 8347 Terra Grande Ave | yes |
| Marilyn Bramley | 302 Monahan Dr | fantastic idea! |
| Carolyn Davis | 5138 S Oakland St. #11, VA | Good idea! |
| Willy De Freitas | 4533 Kewall Dr | nice! |
| April Stephen | 3400A ^{VA} Street ^{VA 22000} | |
| Sherry Chambers | 2932 Landover St ^{Alex} 22305 | Need the Store |
| KIRK SWANSON | 310 RUCKER PL ^{Alex} 22301 | |
| JACK BLAINE | 1200 N. Quaker Ln. | Love IT (!!!) |
| Adam Lynde | 1200 N. Quaker Ln | great great |
| Johnny Bond | 1200 N. Quaker Ln. | very good |
| Jerry Clarke | 1469 A W Vandover St | lets do it |
| Doug McBlathin | 3268 Martha Custis Dr. | excellent! |
| Yesire Parada | 100 N garden st | |

NEW BRADLEE "LIFESTYLE" SAFEWAY

to the Alexandria Planning Commission and Alexandria City Council:

Please vote to approve the new Bradlee "Lifestyle" Safeway:

| PRINTED NAME | Address | COMMENTS |
|-------------------|--|---------------------|
| Pat Coffman | 106 E Taylor Run Pl. | |
| Anne Caldwell | 423 Oranoco Mt | Alex VA 22314 |
| Susan Duncan | 820 Fontaine St | |
| Jacqueline Viteri | 2303 N. Dearing St. | Alex, VA 22302 |
| Staven Mude | 2601 N. Van Dorn St ^{May 22302} | |
| Carrie Robison | " | |
| Monique Pette | 4425 S. 34th St. | ARLINGTON, VA 22206 |
| Michelle Miller | 39B Terry St 22304 | |
| Donald M. Carl | 3324 St. Wakefield ²²²⁰⁶ | |
| Susan Johnson | 1313 Bayliss Drive 22302 | |
| Chansa Sok | 1413 N. Van Dorn St. | |
| Greg Smith | 4509 South 36th St ²²²⁰⁴ ARL VA | |
| Robert C. King | 408 ARGYLE DR ²²³⁰⁵ ALEX | |
| PATRICIA SANTOS | 10637 ALISON DR. ^{BORKE} VA 22015 | |
| Pat Malykh. II | 2731 P Walter Reed ^{Alex} | |
| Stacy Lewis | 1023 Cross Dr. ^{Alex} VA 22302 | Sounds great |
| Jim Rowley | 1812 HOWARD ST | |
| Susan French | 3553 AS Station | |
| Nancy Stridwitz | 3017 S. Columbus | Good Plan |
| MARK Gowin | 1200 N. Quaker Lane | Alex VA 22302 |
| Ann Gorman | 1205 N. Quaker Lane | Alexandria VA |
| Allen Faust | 2924 Byron St | Alexandria, VA |
| | | |
| | | |

NEW BRADLEE "LIFESTYLE" SAFEWAY

to the Alexandria Planning Commission and Alexandria City Council:

Please vote to approve the new Bradlee "Lifestyle" Safeway:

| PRINTED NAME | Address | COMMENTS |
|------------------------------------|--|-----------------------|
| Lugh Henry | 4609 31 st Rd S., Arlington | Please! More produce! |
| SANDY Oliveira | 4300 S. 34 th St | |
| MARY J. THOMAS | 10 W. WINDSOR AVE | |
| Mary Louise Cielna | 5024 Pickett | No complaints |
| Debbie Pi Weber | 3505 Halcyon Dr. | |
| Erika Schilaknecht | 1206 Martha Curtis Dr | |
| Patricia Dunkin | 310 N. Hampton Dr. | |
| BARRY EPSTEIN | 2500 N VAN DORN ST #1425 ALEX VA | YES! |
| ELIS CHAPLIN | 3435 VALLEY DR. ALEX VA 22302 | |
| Clara Webb | 141 N. Alexandria Hill Dr. Alex, VA 22304 | |
| David Skinner | 28 E. Chapman St Alex VA 22301 | Sounds good! |
| Hymarie Mylonis | 3000 Moody St 22305 | |
| Bari Duda | 3116 Ravensworth Pl., 22302 | GET STARTED!! |
| Susan Woodruff | 500 Allison St Alex VA 22302 | |
| Valerie Green | 4601 Newcomb Pl. Alex VA 22304 | |
| WILLIAM REEHL | 204 SUMMERS DR. ALEX, VA 22301 | |
| Tanice Coleman | 3829 Ingalls Ave Alex VA 22301 | |
| Salem Kayal | 3101 N. Hampton Dr Aft III VA 22302 | |
| F. Fatafow David Gibson | 3761 Keller Ave. Alexandria, VA 22302 | |
| Jennifer Solt | 3761 Keller Ave. Alexandria, VA 22302 | |
| Susan Baugh | 3521 Goddards Way Alexandria, VA 22304 | |
| Ruth McKeant | 331 N. Pitt St. Alexandria, VA 22314 | |
| MICHAEL GOODHEAD | 1121 KEY DR. VA 22301 | NO!! |
| Matthew Dwyer | 4414 Raleigh Ave 461 22304 | |

NEW BRADLEE "LIFESTYLE" SAFEWAY

To the Alexandria Planning Commission and Alexandria City Council:

Please vote to approve the new Bradlee "Lifestyle" Safeway:

| PRINTED NAME | Address | COMMENTS |
|------------------|----------------------------------|--------------------------------|
| Tracy T Stone | 413 Fontaine St | |
| KATHY KALINYAK | 1225 Martha Luoko Dr. | |
| Wm MARTINEAU | 2909 Russell | |
| JONAS ANDERSON | 4223 32 nd Rd SW, ARL | |
| Louise Anderson | 4223 32 nd Rd SW ARL. | |
| debi deimling | 4836 S. 29 TH ST ARL | MORE VEGGIE & VEGAN ☺ |
| Krista Sharp | 3169 S. Stafford St | |
| Russell Sharp | 369 S. Stafford St | |
| Eugenia Childs | 7155 Semmerys. | |
| TERRY HALL | 6060 Toward Ct | ALWAYS BUCKLED UP AT CHECKOUT! |
| JANISE TAYLOR | 4800 KILLBUCK AVE. APT 1252 | Look Forward To Shopping |
| TERRI TACKETT | 4245 35 th St. S. | |
| Ramon Ferrellyd | 2500 N. Van Dorn | |
| Carolyn Langley | 3309 Wymondham Cir | |
| G.V. [Signature] | P.O. Box 1565 DHN, ARL | |
| Margaret Hughes | 2106 N. Early St. | Alex Va 22302 |
| JUDITH PETROSKI | 1645 KENWOOD | ALEX 22302 |
| Chanetia Colvin | 3291 S. 31 st St. | Arlington |
| Jackson Lewis | 1033 woods place | |
| Benton Lewis | 1033 woods place | |
| Sandra Paige | 3149 S Stafford St | Fairlington |
| Richard Oscek | 5170 Maris Ave #400 | |
| Debbie Kron | 3822 Keller Ave | |
| ASHLEY ZENI | 3288 S. Utah St. | |

NEW BRADLEE "LIFESTYLE" SAFEWAY

by the Alexandria Planning Commission and Alexandria City Council:

Please vote to approve the new Bradlee "Lifestyle" Safeway:

| PRINTED NAME | Address | COMMENTS |
|------------------------|--|-----------------------------------|
| BRANDON BOSWELL | 11 LARRIAUX HONORABLE CIRLE ALEXANDRIA VA 22304 | |
| Matthew Trout | 3010 South Columbus Street #B1 Arlington VA 22206 | spearing.trout@verizon.net |
| JAN LEEES MARTIJN | 107 W. MYRTLE ST. ALEXANDRIA VA 22301 | |
| Greg Golubin | 2015 SCROGGINS RD Alexandria Va 22307 | A great addition to the area |
| Catherine Gray Gooding | 1200 N Quaker Ln Alex VA 22302 | |
| Pete Page | 3802 Conwell Ln Alexandria VA | More options for the neighborhood |
| Renzo TORCHIANI | 201 N. Ripley St #762 Alex VA 22304 | |
| Kathleen Kelleher | 209 Vassar Pl Alex VA 22314 | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |

Docket Item #5 A-D
MPA #2011-0007
REZ #2011-0001
DSUP #2011-0015
SUP/TMP #2011-0060

Julie Fuerth

From: Jackie Henderson
Sent: Friday, December 02, 2011 7:51 AM
To: Julie Fuerth
Subject: FW: COA Contact Us: Support New Safeway @ King and W. Braddock Rd.
Attachments: ATT00001.txt

From: Nancy Phillips [<mailto:nancyphillips@yahoo.com>]
Sent: Friday, December 02, 2011 6:48 AM
To: William Euille; Frank Fannon; Kerry Donley; Alicia Hughes; Del Pepper; Paul Smedberg; Rose Boyd; Jackie Henderson; Rob Krupicka; Linda Owens; Elizabeth Jones
Subject: COA Contact Us: Support New Safeway @ King and W. Braddock Rd.

COA Contact Us: Mayor, Vice Mayor, and Council Members

Time: [Fri Dec 02, 2011 06:47:39] Message ID: [35065]

Issue Type: Mayor, Vice Mayor, and Council Members
First Name: Nancy
Last Name: Phillips
Street Address: 206 Lloyds Lane
City: Alexandria
State: Virginia
Zip: 22302
Phone: 703-683-0518
Email Address: nancyphillips@yahoo.com
Subject: Support New Safeway @ King and W. Braddock Rd.
Comments:

Docket Item #5 A-D
MPA #2011-0007
REZ #2011-0001
DSUP #2011-0015
SUP/TMP #2011-0060

Julie Fuerth

From: Jackie Henderson
Sent: Thursday, December 01, 2011 1:56 PM
To: Julie Fuerth
Subject: FW: COA Contact Us: Upgrade to Bradlee Safeway
Attachments: ATT00001.txt

From: Michele Cumberland [<mailto:micheleCM@aol.com>]
Sent: Thursday, December 01, 2011 9:51 AM
To: William Euille; Frank Fannon; Kerry Donley; Alicia Hughes; Del Pepper; Paul Smedberg; Rose Boyd; Jackie Henderson; Rob Krupicka; Linda Owens; Elizabeth Jones
Subject: COA Contact Us: Upgrade to Bradlee Safeway

COA Contact Us: Mayor, Vice Mayor, and Council Members

Time: [Thu Dec 01, 2011 09:50:45] Message ID: [35045]

Issue Type: Mayor, Vice Mayor, and Council Members
First Name: Michele
Last Name: Cumberland
Street Address: 105 Stewart Avenue
City: Alexandria
State: VA
Zip: 22301
Phone: 7032999830
Email Address: micheleCM@aol.com
Subject: Upgrade to Bradlee Safeway
I'd like to register my support for the plans to upgrade and increase the size of the Safeway at Bradlee Shopping Center. I think it will bring more
Comments: grocery dollars back into the City from residents going to the large Giant on Glebe Road in Arlington, and heading out to Wegman's to find more upscale items.

Julie Fuerth

From: Julie Fuerth
Sent: Friday, December 02, 2011 5:39 PM
To: sharonf007@yahoo.com
Cc: president@fca-fairlington.org; Kendra Jacobs; Cicely Woodrow; Graciela Moreno; Patricia Escher
Subject: RE: Per our discussion, here are my comments on the proposed expansion of the Bradlee Safeway

Dear Ms. Frey,

Thank you for submitting comments regarding the Bradlee Safeway. By copy of this email, I'm forwarding your message to the appropriate Development staff and Kendra Jacobs, Administrative Staff to the Planning Commission who will make your comments available to the Planning Commission as part of the official record, which will also go to City Council. This project is currently on the Planning Commission Docket for December 6 and on the Preliminary Docket for City Council on December 17. You are welcome to attend these meetings.

Best regards,
Julie Fuerth

From: Sharon Frey [<mailto:sharonf007@yahoo.com>]
Sent: Wednesday, November 30, 2011 3:03 PM
To: Patricia Escher
Cc: president@fca-fairlington.org
Subject: Per our discussion, here are my comments on the proposed expansion of the Bradlee Safeway

Dear Ms. Escher:

Thank you for taking the time to talk to me several weeks ago about my concerns regarding the expansion of the Safeway on King St. at Bradlee. I have considered our conversation along with the article in the November 2011, All Fairlington Bulletin, as well as the information on the website. My concerns mostly relate to the effect the expansion will have on resulting traffic and parking.

My understanding is that there will be a net gain of 29 spaces according to the November 2011, All Fairlington Bulletin. I do not think this increase is adequate for the following reasons.

The new Safeway will almost certainly attract customers who currently go to the Wholefoods located on Duke Street, near Old Town. I believe this will occur, because the new Safeway will offer a selection, atmosphere, etc., that will become competitive with the Wholefoods. I'm concerned that the increase in the number of trips to Safeway that would have otherwise gone to Wholefoods has not been considered. I think that this issue needs to be investigated to ensure that there is an adequate number of spaces in the new Safeway parking lot during peak hours and that the traffic flow is unimpeded given the additional number of trips.

The net gain of the number of parking spaces is inadequate given the current projected number of additional peak trips. According to page 5 of the November 2011 All Fairlington Bulletin, "...the traffic study assumes approximately 55 new trips during the morning peak hour, 161 new trips during the afternoon peak hour, and 166 new trips during the Saturday peak hour." In my mind, the math does not add up. If there are only 29 new spaces and there are an additional 55, 161, and 166 new trips respectively depending on the time of day, I do not

understand how only 29 new spots would be sufficient for these additional trips, especially the 161 and 166 trip estimates. Therefore, more parking spots need to be added to ensure people have enough places to park.

My understanding is that the proposal includes an additional retail space that will not be physically connected to the Safeway. This retail structure would be located in what is now the parking lot. Given the additional anticipated number of trips at peak hours for the reasons stated above, this building will take away parking spots that are needed. This building is not necessary as the new Safeway will have everything to be fully updated.

I am concerned that the number of entrances/exits to the parking lot will be inadequate given the number of anticipated additional trips that have been studied and those that have not been studied (bringing customers from the Duke St. Wholefoods), specifically from the King Street service road. There need to be at least the same number of entrances/exits, i.e. 2, so that the additional trips do not result in an impediment to traffic flow. From what I can tell, it looks like there is only one entrance to the Safeway parking lot from the service road. If I am incorrect in that there is only one entrance and there are indeed two, then it probably is not an issue.

I think it is erroneous to assume that a lot more people will simply walk to Safeway and not drive. I agree that more people will walk than at present to take advantage of the new services that the Safeway will offer. However, as of now and in the future, that may be the case if someone wants to grab a few items that they can carry. Regardless, I think that most of the customers will still need to get enough groceries that they will need to drive to the store, regardless of whether they take advantage of new services that the new Safeway would provide.

Finally, I feel strongly that Safeway does not resort to any underground parking. My understanding is that there will be some covered surface parking which will be a nice thing to have. However, underground parking will defeat the purpose of making an efficient trip to the store which many of us wish to do. I know this is anecdotal, but I know of a number of individuals who do not frequent stores with underground parking. One can always find a competitor with less hassle.

Thank you for taking my comments into consideration. If you have any questions, please do not hesitate to contact me via my email address: sharonf007@yahoo.com.

cc: Rosalind Jordan, president@fca-fairlington.org

Julie Fuerth

From: Julie Fuerth
Sent: Friday, December 02, 2011 5:36 PM
To: scr@episcopalhighschool.org
Cc: Kendra Jacobs; Cicely Woodrow; Graciela Moreno
Subject: FW: COA Contact Us: Safeway at Bradlee
Attachments: ATT00002.txt

Dear Ms. Rodgers,

Thank you for submitting comments regarding the Bradlee Safeway. By copy of this email, I'm forwarding your message to the appropriate Development staff and Kendra Jacobs, Administrative Staff to the Planning Commission who will make your comments available to the Planning Commission as part of the official record, which will also go to City Council. This project is currently on the Planning Commission Docket for December 6 and on the Preliminary Docket for City Council on December 17. You are welcome to attend these meetings.

Best regards,
Julie Fuerth

From: Shelley Rodgers [<mailto:scr@episcopalhighschool.org>]
Sent: Thursday, December 01, 2011 8:38 AM
To: PnZFeedback; Cicely Woodrow; Graciela Moreno
Subject: COA Contact Us: Safeway at Bradlee

COA Contact Us: Planning and Zoning General Feedback

Time: [Thu Dec 01, 2011 08:37:52] Message ID: [35039]

Issue Type: Planning and Zoning General Feedback
First Name: Shelley
Last Name: Rodgers
Street Address: 1509 Oakcrest Drive
City: Alexandria
State: VA
Zip: 22302
Phone: 703-998-2323
Email Address: scr@episcopalhighschool.org
Subject: Safeway at Bradlee
I support new renovation of Safeway at Bradlee Shopping Center even if it
Comments: means I have to shop at the crummy Giant during the process. Thank you,
Shelley Rodgers

Julie Fuerth

From: Jackie Henderson
Sent: Thursday, December 01, 2011 9:46 AM
To: Julie Fuerth
Subject: FW: COA Contact Us: Proposed Safeway
Attachments: ATT00001.txt

From: Vernon Cockrell [<mailto:vernon29@gmail.com>]
Sent: Thursday, December 01, 2011 9:45 AM
To: William Euille; Frank Fannon; Kerry Donley; Alicia Hughes; Del Pepper; Paul Smedberg; Rose Boyd; Jackie Henderson; Rob Krupicka; Linda Owens; Elizabeth Jones
Subject: COA Contact Us: Proposed Safeway

COA Contact Us: Mayor, Vice Mayor, and Council Members

Time: [Thu Dec 01, 2011 09:44:42] Message ID: [35043]

Issue Type: Mayor, Vice Mayor, and Council Members
First Name: Vernon
Last Name: Cockrell
Street Address: 29 Cockrell Street
City: Alexandria
State: VA
Zip: 22304
Phone: 703-370-1421
Email Address: vernon29@gmail.com
Subject: Proposed Safeway
This e-mail represents my vote in favor of the proposed Lifestyle Safeway
Comments:
at the Bradlee Center

Julie Fuerth

From: Jackie Henderson
Sent: Thursday, December 01, 2011 9:46 AM
To: Julie Fuerth
Subject: FW: COA Contact Us: Proposed Safeway Bradlee
Attachments: ATT00001.txt

From: William Cockrell [<mailto:wccac@comcast.net>]
Sent: Thursday, December 01, 2011 9:41 AM
To: William Euille; Frank Fannon; Kerry Donley; Alicia Hughes; Del Pepper; Paul Smedberg; Rose Boyd; Jackie Henderson; Rob Krupicka; Linda Owens; Elizabeth Jones
Subject: COA Contact Us: Proposed Safeway Bradlee

COA Contact Us: Mayor, Vice Mayor, and Council Members

Time: [Thu Dec 01, 2011 09:41:11] Message ID: [35042]

Issue Type: Mayor, Vice Mayor, and Council Members
First Name: William
Last Name: Cockrell
Street Address: 3638 Duke Street
City: Alexandria
State: VA
Zip: 22304
Phone: 703-370-9095
Email Address: wccac@comcast.net
Subject: Proposed Safeway Bradlee
Comments: This e-mail is my vote for the proposed Safeway at Bradlee Shopping Center

Julie Fuerth

From: Jackie Henderson
Sent: Thursday, December 01, 2011 9:46 AM
To: Julie Fuerth
Subject: FW: COA Contact Us: Proposed New Safeway - Bradlee Shopping Center
Attachments: ATT00001.txt

From: Craig Veith [<mailto:craig.veith@craigveith.com>]
Sent: Thursday, December 01, 2011 9:37 AM
To: William Euille; Frank Fannon; Kerry Donley; Alicia Hughes; Del Pepper; Paul Smedberg; Rose Boyd; Jackie Henderson; Rob Krupicka; Linda Owens; Elizabeth Jones
Subject: COA Contact Us: Proposed New Safeway - Bradlee Shopping Center

COA Contact Us: Mayor, Vice Mayor, and Council Members

Time: [Thu Dec 01, 2011 09:37:06] Message ID: [35041]

Issue Type: Mayor, Vice Mayor, and Council Members
First Name: Craig
Last Name: Veith
Street Address: 2306 Valley Drive
City: Alexandria
State: VA
Zip: 22302
Phone: 703.717.9816
Email Address: craig.veith@craigveith.com
Subject: Proposed New Safeway - Bradlee Shopping Center
Please support the development of the proposed renovation of the Safeway at

Bradlee Shopping Center.
This section of the City desperately needs an

Comments: updated, 21st Century store. Safeway has been a good citizen in

Alexandria and deserves the right to operate a more sophisticated and

modern store in its current
location.

Julie Fuerth

From: Jackie Henderson
Sent: Thursday, December 01, 2011 9:45 AM
To: Julie Fuerth
Subject: FW: COA Contact Us: Bradlee Lifestyle Safeway
Attachments: ATT00002.txt

From: Catherine Cockrell [<mailto:wccac@verizon.net>]
Sent: Thursday, December 01, 2011 9:33 AM
To: William Euille; Frank Fannon; Kerry Donley; Alicia Hughes; Del Pepper; Paul Smedberg; Rose Boyd; Jackie Henderson; Rob Krupicka; Linda Owens; Elizabeth Jones
Subject: COA Contact Us: Bradlee Lifestyle Safeway

COA Contact Us: Mayor, Vice Mayor, and Council Members

Time: [Thu Dec 01, 2011 09:33:04] Message ID: [35040]

Issue Type: Mayor, Vice Mayor, and Council Members
First Name: Catherine
Last Name: Cockrell
Street Address: 3638 Duke Street
City: Alexandria
State: VA
Zip: 22304
Phone: 703-370-9095
Email Address: wccac@verizon.net
Subject: Bradlee Lifestyle Safeway
I'm writing to once again affirm my support for the proposed Safeway at the
Comments: Bradlee Shopping Center.

Docket Item #5 A-D
MPA #2011-0007
REZ #2011-0001
DSUP #2011-0015
SUP/TMP #2011-0060

Julie Fuerth

From: Jackie Henderson
Sent: Thursday, December 01, 2011 8:36 AM
To: Julie Fuerth
Subject: FW: COA Contact Us: Support for lifestyle safeway
Attachments: ATT00001.txt

From: Karen Barnes [<mailto:Kcb703@gmail.com>]
Sent: Thursday, December 01, 2011 8:36 AM
To: William Euille; Frank Fannon; Kerry Donley; Alicia Hughes; Del Pepper; Paul Smedberg; Rose Boyd; Jackie Henderson; Rob Krupicka; Linda Owens; Elizabeth Jones
Subject: COA Contact Us: Support for lifestyle safeway

COA Contact Us: Mayor, Vice Mayor, and Council Members

Time: [Thu Dec 01, 2011 08:35:30] Message ID: [35037]

Issue Type: Mayor, Vice Mayor, and Council Members
First Name: Karen
Last Name: Barnes
Street Address: 406 n view terrace
City: Alexandria
State: Va
Zip: 22301
Phone: 7035491875
Email Address: Kcb703@gmail.com
Subject: Support for lifestyle safeway
Comments: Expressing my support for new Safeway at Bradlee center.

Julie Fuerth

From: Jackie Henderson
Sent: Thursday, December 01, 2011 8:09 AM
To: Julie Fuerth
Subject: FW: COA Contact Us: Safeway
Attachments: ATT00002.txt

From: Joyce Draper [<mailto:jadraper@comcast.net>]
Sent: Wednesday, November 30, 2011 6:30 PM
To: William Euille; Frank Fannon; Kerry Donley; Alicia Hughes; Del Pepper; Paul Smedberg; Rose Boyd; Jackie Henderson; Rob Krupicka; Linda Owens; Elizabeth Jones
Subject: COA Contact Us: Safeway

COA Contact Us: Mayor, Vice Mayor, and Council Members

Time: [Wed Nov 30, 2011 18:30:08] Message ID: [35026]

Issue Type: Mayor, Vice Mayor, and Council Members

First Name: Joyce

Last Name: Draper

Street Address: 300 Mansion Drive

City: Alexandria

State: VA

Zip: 22302

Phone: 703-836-1715

Email Address: jadraper@comcast.net

Subject: Safeway

Comments: I have lived in Alexandria for over 20 years we do most of our shopping at the Bradlee Safeway. I would welcome a renovated and updated store! We are

in need of a nice grocery establishment in that part of Alexandria. Please back this plan!

Julie Fuerth

From: Jackie Henderson
Sent: Thursday, December 01, 2011 8:09 AM
To: Julie Fuerth
Subject: FW: COA Contact Us: Bradlee Safeway
Attachments: ATT00001.txt

From: Kathryn Blair [<mailto:kdblair@comcast.net>]
Sent: Wednesday, November 30, 2011 7:18 PM
To: William Euille; Frank Fannon; Kerry Donley; Alicia Hughes; Del Pepper; Paul Smedberg; Rose Boyd; Jackie Henderson; Rob Krupicka; Linda Owens; Elizabeth Jones
Subject: COA Contact Us: Bradlee Safeway

COA Contact Us: Mayor, Vice Mayor, and Council Members

Time: [Wed Nov 30, 2011 19:17:31] Message ID: [35029]

Issue Type: Mayor, Vice Mayor, and Council Members
First Name: Kathryn
Last Name: Blair
Street Address: 2421 Taylor Avenue
City: Alexandria
State: VA
Zip: 22302
Phone:
Email Address: kdblair@comcast.net
Subject: Bradlee Safeway
The Bradlee Safeway has been my grocery store for over 23 years, including a couple of years prior to my move to Alexandria! This store has become a place to catch up with neighbors and friends, as well as to buy groceries. The employees of the Safeway have come to know me and my family, as well as those of most of their customers. They have watched the neighborhood children grow up and have celebrated their birthdays, homecoming dances, graduations, weddings, etc. This Safeway has become a fixture in Alexandria, and it is in desperate need of an upgrade--the facility is old and the set up of the store does not meet the current needs of its customers as well as it should for a store in such a central location.

I support the new Safeway project wholeheartedly and hope that you will approve its applications. I look forward to shopping in a wonderful new Safeway in the near future!

Many thanks,

Kathryn Blair

Julie Fuerth

From: Jackie Henderson
Sent: Thursday, December 01, 2011 8:09 AM
To: Julie Fuerth
Subject: FW: COA Contact Us: Lifestyle Safeway
Attachments: ATT00001.txt

From: Laurie Drysdale [<mailto:ladrysdale@aol.com>]
Sent: Wednesday, November 30, 2011 8:04 PM
To: William Euille; Frank Fannon; Kerry Donley; Alicia Hughes; Del Pepper; Paul Smedberg; Rose Boyd; Jackie Henderson; Rob Krupicka; Linda Owens; Elizabeth Jones
Subject: COA Contact Us: Lifestyle Safeway

COA Contact Us: Mayor, Vice Mayor, and Council Members

Time: [Wed Nov 30, 2011 20:03:49] Message ID: [35030]

Issue Type: Mayor, Vice Mayor, and Council Members

First Name: Laurie

Last Name: Drysdale

Street Address:

City: Alexandria

State: Virginia

Zip: 22304

Phone: 703-370-0344

Email Address: ladrysdale@aol.com

Subject: Lifestyle Safeway

I am writing to encourage the Mayor, the City Council, and the Planning

Commission to support Safeway's request to build a Lifestyle Safeway at

their current Bradlee location. I have been a frequent Bradlee Safeway

customer for many years, but have avoided going there for some time.

Comments: This location is extremely convenient to where I live and I would love to

return to shopping there if the store provided the quality shopping

experience proposed by Safeway. I hope you all will give their request

proper consideration and will vote to approve their applications.

Julie Fuerth

Docket Item #5 A-D
MPA #2011-0007
REZ #2011-0001
DSUP #2011-0015
SUP/TMP #2011-0060

From: Jackie Henderson
Sent: Wednesday, November 30, 2011 4:30 PM
To: Julie Fuerth
Subject: FW: COA Contact Us: Bradlee Safeway
Attachments: ATT00002.txt

From: Kathleen McLaughlin [<mailto:ktm@dmgggroup.com>]
Sent: Wednesday, November 30, 2011 4:20 PM
To: William Euille; Frank Fannon; Kerry Donley; Alicia Hughes; Del Pepper; Paul Smedberg; Rose Boyd; Jackie Henderson; Rob Krupicka; Linda Owens; Elizabeth Jones
Subject: COA Contact Us: Bradlee Safeway

COA Contact Us: Mayor, Vice Mayor, and Council Members

Time: [Wed Nov 30, 2011 16:19:45] Message ID: [35025]

Issue Type: Mayor, Vice Mayor, and Council Members
First Name: Kathleen
Last Name: McLaughlin
Street Address: 803 North Howard Street #537
City: Alexandria
State: Virginia
Zip: 22304
Phone: 703 823 2435
Email Address: ktm@dmgggroup.com
Subject: Bradlee Safeway

Comments: I am writing to inform our Alexandria public officials of my support for the new Bradlee Safeway. I shop in this store at least once a week and realize that it will benefit me and my fellow shoppers to have a bigger, more modern store in our neighborhood. Without this expansion this store will not be able to offer the myriad choices other comparable stores offer. We want our neighborhood store to be the best it can be. Please approve this project. Thank you.

Julie Fuerth

From: Jackie Henderson
Sent: Thursday, December 01, 2011 8:09 AM
To: Julie Fuerth
Subject: FW: COA Contact Us: In support of the proposed new Safeway
Attachments: ATT00001.txt

From: Melynda Wilcox [<mailto:melynda.wilcox@gmail.com>]
Sent: Wednesday, November 30, 2011 10:38 PM
To: William Euille; Frank Fannon; Kerry Donley; Alicia Hughes; Del Pepper; Paul Smedberg; Rose Boyd; Jackie Henderson; Rob Krupicka; Linda Owens; Elizabeth Jones
Subject: COA Contact Us: In support of the proposed new Safeway

COA Contact Us: Mayor, Vice Mayor, and Council Members

Time: [Wed Nov 30, 2011 22:38:06] Message ID: [35031]

Issue Type: Mayor, Vice Mayor, and Council Members
First Name: Melynda
Last Name: Wilcox
Street Address: 403 Jackson Place
City: Alexandria
State: VA
Zip: 22302
Phone: 703-549-3865
Email Address: melynda.wilcox@gmail.com
Subject: In support of the proposed new Safeway
Just a quick note to let you all know that my husband David and I
wholeheartedly support the plans to construct a new Safeway at the
Bradlee
site. A full-service store to compete with the Harris Teeters at
Comments: Shirlington and Potomac Yard is needed as quickly as possible to avoid
further erosion of tax revenue to Arlington County.
Thank you for your
time.
Melynda Wilcox

Jackie Henderson

From: Tim Sedgwick <tsedgwick@vts.edu>
Sent: Tuesday, November 29, 2011 9:00 PM
To: William Euille; Frank Fannon; Kerry Donley; Alicia Hughes; Del Pepper; Paul Smedberg; Rose Boyd; Jackie Henderson; Rob Krupicka; Linda Owens; Elizabeth Jones
Subject: COA Contact Us: Safeway redevelopment
Attachments: ATT00001.txt

COA Contact Us: Mayor, Vice Mayor, and Council Members

Time: [Tue Nov 29, 2011 21:00:05] Message ID: [34994]

Issue Type: Mayor, Vice Mayor, and Council Members
First Name: Tim
Last Name: Sedgwick
Street Address: 3737 Seminary Road
City: Alexandria
State: VA
Zip: 22304
Phone: 703-751-4983
Email Address: tsedgwick@vts.edu
Subject: Safeway redevelopment

Dear Mayor and City Council:

I would like to register my strong support

for the redevelopment of the Safeway Store in Bradlee. The store is the anchor for the shopping center which, in turn, is critical to serving the neighborhood. The store is in need of renovation and as envisioned will better serve the community. The plan includes adequate parking, though my

guess is that some may oppose the redevelopment claiming that it will draw

Comments: more traffic into a congested area. The problem of congestion in the crossroads of Braddock and King and Quaker remain an outstanding matter regardless of the renovation and requires an independent solution.

Sincerely,

Tim Sedgwick
Resident
3737 Seminary Road
Alexandria,

Jackie Henderson

From: Alison Ramelli <chandlerramelli@aol.com>
Sent: Tuesday, November 29, 2011 5:29 PM
To: William Euille; Frank Fannon; Kerry Donley; Alicia Hughes; Del Pepper; Paul Smedberg; Rose Boyd; Jackie Henderson; Rob Krupicka; Linda Owens; Elizabeth Jones
Subject: COA Contact Us: Bradlee Safeway reconstruction
Attachments: ATT00001.txt

COA Contact Us: Mayor, Vice Mayor, and Council Members

Time: [Tue Nov 29, 2011 17:28:52] Message ID: [34988]

Issue Type: Mayor, Vice Mayor, and Council Members
First Name: Alison
Last Name: Ramelli
Street Address: 718 South Washington St. #302
City: Alexandria
State: VA
Zip: 22314
Phone: 7032982191
Email Address: chandlerramelli@aol.com

Subject: Bradlee Safeway reconstruction

The Bradlee Safeway has been there going on 30 years now, it's disgusting

in that thing. It is amazing to me that no one has come down with Typhoid

or something worse yet from eating food sold in there. We need a new store,

Comments:

we deserve a new store. I shop in other counties because of this store. I

can't be the only one that refuses to shop at that Safeway because of its

deterating condition. Please allow Safeway to rebuild the structure.

Docket Item #5 A-D
MPA #2011-0007
REZ #2011-0001
DSUP #2011-0015
SUP/TMP #2011-0060

Jackie Henderson

From: Sarah McElveen <McElveen@OldTownLawyers.com>
Sent: Tuesday, November 29, 2011 5:12 PM
To: William Euille; Frank Fannon; Kerry Donley; Alicia Hughes; Del Pepper; Paul Smedberg; Rose Boyd; Jackie Henderson; Rob Krupicka; Linda Owens; Elizabeth Jones
Subject: COA Contact Us: proposed Safeway
Attachments: ATT00001.txt

COA Contact Us: Mayor, Vice Mayor, and Council Members

Time: [Tue Nov 29, 2011 17:12:05] Message ID: [34987]

Issue Type: Mayor, Vice Mayor, and Council Members
First Name: Sarah
Last Name: McElveen
Street Address: 718 S. Washington St., #304
City: Alexandria
State: VA
Zip: 22314
Phone:
Email Address: McElveen@OldTownLawyers.com

Subject: proposed Safeway

Dear City Council:

Comments: I write to express my support of the proposed new
Bradlee Safeway project, and encourage the council to support it as well
and vote to approve the relevant applications.

Docket Item #5 A-D
MPA #2011-0007
REZ #2011-0001
DSUP #2011-0015
SUP/TMP #2011-0060

Jackie Henderson

From: Paul Larkin <larcorp5@gmail.com>
Sent: Monday, November 28, 2011 7:20 PM
To: William Euille; Frank Fannon; Kerry Donley; Alicia Hughes; Del Pepper; Paul Smedberg; Rose Boyd; Jackie Henderson; Rob Krupicka; Linda Owens; Elizabeth Jones
Subject: COA Contact Us: New Bradless "Lifestyle" Safeway
Attachments: ATT00002.txt

COA Contact Us: Mayor, Vice Mayor, and Council Members

Time: [Mon Nov 28, 2011 19:19:46] Message ID: [34973]

Issue Type: Mayor, Vice Mayor, and Council Members
First Name: Paul
Last Name: Larkin
Street Address: 1314 Cleveland St
City: Alexandria
State: VA
Zip: 22302
Phone: 703-931-1704
Email Address: larcorp5@gmail.com
Subject: New Bradless "Lifestyle" Safeway
I support the tearing down and building of the new Bradlee "Lifestyle"
Comments:
" Safeway.

Jackie Henderson

From: Thomas McCaffery <tmccaffery@mccafferyassoc.com>
Sent: Thursday, November 24, 2011 7:42 PM
To: William Euille; Frank Fannon; Kerry Donley; Alicia Hughes; Del Pepper; Paul Smedberg; Rose Boyd; Jackie Henderson; Rob Krupicka; Linda Owens; Elizabeth Jones
Subject: COA Contact Us: Bradlee "Lifestyle" Safeway
Attachments: ATT00001.txt

COA Contact Us: Mayor, Vice Mayor, and Council Members

Time: [Thu Nov 24, 2011 19:41:58] Message ID: [34906]

Issue Type: Mayor, Vice Mayor, and Council Members
First Name: Thomas
Last Name: McCaffery
Street Address: 912 West Braddock Road
City: Alexandria
State: Virginia
Zip: 22302
Phone: 7035482287
Email Address: tmccaffery@mccafferyassoc.com
Subject: Bradlee "Lifestyle" Safeway
Please support the development of the new Lifestyle Safeway at Bradlee.
Comments: The current store is old, the ceiling leaks in several spots when there is heavy rain and would be a tremendous addition to the area

Jackie Henderson

From: Valerie Carter <carterv68@yahoo.com>
Sent: Wednesday, November 23, 2011 2:02 PM
To: William Euille; Frank Fannon; Kerry Donley; Alicia Hughes; Del Pepper; Paul Smedberg; Rose Boyd; Jackie Henderson; Rob Krupicka; Linda Owens; Elizabeth Jones
Subject: COA Contact Us: New Safeway
Attachments: ATT00001.txt

COA Contact Us: Mayor, Vice Mayor, and Council Members

Time: [Wed Nov 23, 2011 14:01:45] Message ID: [34891]

Issue Type: Mayor, Vice Mayor, and Council Members
First Name: Valerie
Last Name: Carter
Street Address: 3499 S Utah St
City: Arlington
State: VA
Zip: 22206
Phone: 571-431-7117
Email Address: carterv68@yahoo.com
Subject: New Safeway

I understand that the new Safeway project will be taken up at the next Alexandria Planning Committee Meeting on December 6. As a resident of Fairlington, I would like to voice my support for this project.

We desperately need a new and expanded grocery store in the Fairlington area to better serve residents of both Alexandria and Arlington. As it is now, we must travel to other areas to buy groceries and only use these old, dilapidated and small stores in a limited capacity. I rarely shop there, but would prefer to patron something closer to home if it provided the clean, expanded facility that would bring more diversity in shopping as is proposed by Safeway.

In addition to making shopping more convenient and provide greater diversity in shopping options, the new store would provide a better, safer, cleaner and more modern facility (instead of the eye sore that now exists), and a greater sense of community for residents.

believe it is in the best interest of the residents of this area for the

Planning Committee to approve the Safeway plans to move forward with this

new facility, and hope the Committee will see fit to do so as soon as possible.

Regards,

Valerie Carter

Jackie Henderson

Docket Item #5 A-D
MPA #2011-0007
REZ #2011-0001
DSUP #2011-0015
SUP/TMP #2011-0060

From: Shannon Russell <smrussell6@comcast.net>
Sent: Monday, November 21, 2011 3:36 PM
To: William Euille; Frank Fannon; Kerry Donley; Alicia Hughes; Del Pepper; Paul Smedberg; Rose Boyd; Jackie Henderson; Rob Krupicka; Linda Owens; Elizabeth Jones
Subject: COA Contact Us: new Safeway
Attachments: ATT00001.txt

COA Contact Us: Mayor, Vice Mayor, and Council Members

Time: [Mon Nov 21, 2011 15:36:00] Message ID: [34854]

Issue Type: Mayor, Vice Mayor, and Council Members
First Name: Shannon
Last Name: Russell
Street Address: 4277 B-1 South 35th St.
City: Arlington
State: VA
Zip: 22206
Phone: 703 820 2953
Email Address: smrussell6@comcast.net
Subject: new Safeway
while my address is Arlington, I am only one block from the Alexandria border. Over the years while the new owner has refused to invest in the "baby" Giant at Bradee Shopping Center, I find myself going to Safeway more and more. Please support the renovation of the Safeway, as it's about time this part of Alexandria gets a nice grocery store.

Jackie Henderson

From: Molly Fogarty <kmfogarty@verizon.net>
Sent: Monday, November 21, 2011 3:29 PM
To: William Euille; Frank Fannon; Kerry Donley; Alicia Hughes; Del Pepper; Paul Smedberg; Rose Boyd; Jackie Henderson; Rob Krupicka; Linda Owens; Elizabeth Jones
Subject: COA Contact Us: Safeway
Attachments: ATT00001.txt

COA Contact Us: Mayor, Vice Mayor, and Council Members

Time: [Mon Nov 21, 2011 15:28:53] Message ID: [34853]

Issue Type: Mayor, Vice Mayor, and Council Members
First Name: Molly
Last Name: Fogarty
Street Address: 4637B 36th Street S
City: Arlington
State: VA
Zip: 22206
Phone: 703-946-7865
Email Address: kmfogarty@verizon.net
Subject: Safeway

I live in Fairlington and I would like to see the new Safeway store project move forward. I currently drive more than 2 miles further down the road to Harris Teeter to shop because the current Safeway is so dated. I'm pleased that the company wants to put money into fixing up our store and I hope that the City will allow them to move forward.

Jackie Henderson

From: Kerry O'Hare <kohare4@aol.com>
Sent: Thursday, November 17, 2011 6:54 PM
To: William Euille; Frank Fannon; Kerry Donley; Alicia Hughes; Del Pepper; Paul Smedberg; Rose Boyd; Jackie Henderson; Rob Krupicka; Linda Owens; Elizabeth Jones
Subject: COA Contact Us: Lifestyle Safeway
Attachments: ATT00001.txt

COA Contact Us: Mayor, Vice Mayor, and Council Members

Time: [Thu Nov 17, 2011 18:53:50] Message ID: [34784]

Issue Type: Mayor, Vice Mayor, and Council Members
First Name: Kerry
Last Name: O'Hare
Street Address:
City:
State:
Zip:
Phone:
Email Address: kohare4@aol.com
Subject: Lifestyle Safeway
I live in Fairlington and would like you to know that I strongly support
the planned lifestyle Safeway at the
Bradlee Shopping Center. Please
Comments: vote to bring this store into the 21st century!
Sincerely,
Kerry
O'Hare

Docket Item #5 A-D
MPA #2011-0007
REZ #2011-0001
DSUP #2011-0015
SUP/TMP #2011-0060

Jackie Henderson

From: Gillie Campbell <mseltzgw@comcast.net>
Sent: Wednesday, November 09, 2011 8:37 PM
To: William Euille; Frank Fannon; Kerry Donley; Alicia Hughes; Del Pepper; Paul Smedberg; Rose Boyd; Jackie Henderson; Rob Krupicka; Linda Owens; Elizabeth Jones
Subject: COA Contact Us: Safeway at Bradlee
Attachments: ATT00002.txt

COA Contact Us: Mayor, Vice Mayor, and Council Members

Time: [Wed Nov 09, 2011 20:37:13] Message ID: [34617]

Issue Type: Mayor, Vice Mayor, and Council Members
First Name: Gillie
Last Name: Campbell
Street Address: 409 Hanson Lane
City: Alexandria
State: VA
Zip: 22302
Phone: 7035487752
Email Address: mseltzgw@comcast.net
Subject: Safeway at Bradlee
Comments: I support the renovation and improvement of Safeway at Bradlee.

Jackie Henderson

From: Charles Wayne <charles.wayne@dlapiper.com>
Sent: Saturday, October 29, 2011 9:31 AM
To: William Euille; Frank Fannon; Kerry Donley; Alicia Hughes; Del Pepper; Paul Smedberg; Rose Boyd; Jackie Henderson; Rob Krupicka; Linda Owens; Elizabeth Jones
Subject: COA Contact Us: Safeway project on King Street (Bradlee)
Attachments: ATT00001.txt

COA Contact Us: Mayor, Vice Mayor, and Council Members

Time: [Sat Oct 29, 2011 09:30:38] Message ID: [34378]

Issue Type: Mayor, Vice Mayor, and Council Members

First Name: Charles

Last Name: Wayne

Street Address: 804 Beverley Dr.

City: Alexandria

State: VA

Zip: 22302

Phone: 703 836-1980

Email Address: charles.wayne@dlapiper.com

Subject: Safeway project on King Street (Bradlee)

I am a 30-plus year resident of Beverley Hills and I want to express my support for the proposed remodeling of the Safeway next to the Bradlee Shopping Center. I have attended one of the community meetings and found the objections voiced by the few opponents to be ill-informed and ridiculous. The proposed plan will create no additional traffic burdens and will give our neighborhood a first-rate grocery store, which is lacking. Moreover, the objections to the proposed design of the new building make no sense. The Safeway is not in Old Town; it's next to a strip mall, for goodness sake. The design is first-rate, and the fact that it doesn't look like the chapel at Episcopal High School is no reason not to approve it.

Jackie Henderson

From: April O'Reilly <ascatalano@yahoo.com>
Sent: Monday, October 03, 2011 12:44 PM
To: William Euille; Frank Fannon; Kerry Donley; Alicia Hughes; Del Pepper; Paul Smedberg; Rose Boyd; Jackie Henderson; Elaine Scott; Rob Krupicka; Linda Owens; Elizabeth Jones
Subject: COA Contact Us: Safeway at Bradelee Center
Attachments: ATT00001..txt

COA Contact Us: Mayor, Vice Mayor, and Council Members

Time: [Mon Oct 03, 2011 12:43:45] Message ID: [33600]

Issue Type: Mayor, Vice Mayor, and Council Members
First Name: April
Last Name: O'Reilly
Street Address: 1721 Dogwood Dr
City: alexandria
State: VA
Zip: 22302
Phone:
Email Address: ascatalano@yahoo.com
Subject: Safeway at Bradelee Center

To whom it may concern:

I am unable to attend the community meeting on

October 6th, but wanted to express my support for the proposed remodel of

the Safeway in Bradelee Center. I'm a local resident and primarily shop at

that Safeway. The store in its current building is an eyesore compared to

the other establishments in the shopping center. It also no longer

supports the needs of our ever-growing community. The store needs to be

Comments: expanded in size and service offerings- it is a good store, but is often

over-crowded with long lines, the aisles are crowded, and it does not fit

the image that our community is proud of. The store is older, crowded, and

run down. Updating the store will not only improve its appearance in the

community, but also provide a store that's on par with other neighborhood

grocery stores such as the Harris Teeter in Shirlington.

Thank you for

your time.

The O'Reilly family

Jackie Henderson

From: Ed Mensh <ed.mensh@yahoo.com>
Sent: Thursday, September 29, 2011 1:32 PM
To: William Euille; Frank Fannon; Kerry Donley; Alicia Hughes; Del Pepper; Paul Smedberg; Rose Boyd; Jackie Henderson; Elaine Scott; Rob Krupicka; Linda Owens; Elizabeth Jones
Subject: COA Contact Us: New Lifestyle Safeway
Attachments: ATT00001..txt

COA Contact Us: Mayor, Vice Mayor, and Council Members

Time: [Thu Sep 29, 2011 13:32:04] Message ID: [33508]

Issue Type: Mayor, Vice Mayor, and Council Members
First Name: Ed
Last Name: Mensh
Street Address: 2204 Minor St
City: Alexandria
State: Va
Zip: 22302
Phone: 703-820-0892
Email Address: ed.mensh@yahoo.com
Subject: New Lifestyle Safeway

I am the new Store Manager at the King St Safeway. I live in Alexandria within a half mile of the store and have for 27 years. I'm a life long city resident and through my participation as a member of the Eastern Division Safeway Foundation Board have been active in supporting city events. I as most of my neighbors are excited at the prospect of a new store at the current location and how it will enhance our shopping options. I look forward to your support of this project as we move through the approval process.

Thank you
Ed Mensh

Jackie Henderson

From: Jennifer Archer <jennydarcher@yahoo.com>
Sent: Monday, September 26, 2011 8:04 AM
To: William Euille; Frank Fannon; Kerry Donley; Alicia Hughes; Del Pepper; Paul Smedberg; Rose Boyd; Jackie Henderson; Elaine Scott; Rob Krupicka; Linda Owens; Elizabeth Jones
Subject: COA Contact Us: New Safeway
Attachments: ATT00001.txt

COA Contact Us: Mayor, Vice Mayor, and Council Members

Time: [Mon Sep 26, 2011 08:04:02] Message ID: [33415]

Issue Type: Mayor, Vice Mayor, and Council Members
First Name: Jennifer
Last Name: Archer
Street Address: 3208 Circle Hill Road
City: Alexandria
State: Virginia
Zip: 22305
Phone: 7035486744
Email Address: jennydarcher@yahoo.com
Subject: New Safeway
I heartily endorse permitting Safeway to build a new Safeway at the intersection of King, Braddock and Quaker Lane. The existing supermarket is extremely dated and does not have the facilities necessary to bring
Comments: the best possible produce, dairy, meat products, etc. to the high number of people who use it regularly. Please approve this request. This part of Alexandria needs an updated grocery facility. Thank you.

Jackie Henderson

From: Greg Lukmire <glukmire@lukmire.com>
Sent: Wednesday, November 30, 2011 8:45 AM
To: William Euille; Frank Fannon; Kerry Donley; Alicia Hughes; Del Pepper; Paul Smedberg; Rose Boyd; Jackie Henderson; Rob Krupicka; Linda Owens; Elizabeth Jones
Subject: COA Contact Us: Bradlee Safeway
Attachments: ATT00001.txt

COA Contact Us: Mayor, Vice Mayor, and Council Members

Time: [Wed Nov 30, 2011 08:45:18] Message ID: [34996]

Issue Type: Mayor, Vice Mayor, and Council Members
First Name: Greg
Last Name: Lukmire
Street Address: 4234 S 35th st
City: arlington
State: va
Zip: 22206
Phone: 703-795-5865
Email Address: glukmire@lukmire.com
Subject: Bradlee Safeway
I own 2 units across the street from the proposed new Safeway. I am also an architect who is concerned about the loss of "quality of life" if this project is approved as designed. I am concerned about 3 things:
1. Architecture: This building will LOOM over the townhouses across the street. The Safeway states that the new bldg will be 44' high and the townhouses are 28'. That is untrue. they range from 18'-22' to the cornice and 24'-26' to the mid point of the sloped roof. (as measured by both Alex and Arl zoning).
2. Nighttime lighting: This building will polute the night sky and is not a "Green design". The townhouses across the street will be "bathed " in light all night long and instead of looking out and seeing the sky, will look into the "lantern" created by the glass corner.
3. Traffic- there will be fewer parking spaces and the explanation is that people will walk. That is ridiculous. No one does their major shopping and walks home carrying 6

heavy bags. If this Safeway is to be larger and provide more products, it is my assumption they expect people to buy MORE not LESS and in order to

haul groceries home, one will need to drive.

I am opposing the project

unless:

1. they lower the building
2. they delete any night sky pollution

by eliminating the glass facing the townhouses

3. they provide more

parking

Thank you.

Jackie Henderson

From: Sarah Constant <sarahconstant@me.com>
Sent: Wednesday, November 30, 2011 8:54 AM
To: William Euille; Frank Fannon; Kerry Donley; Alicia Hughes; Del Pepper; Paul Smedberg; Rose Boyd; Jackie Henderson; Rob Krupicka; Linda Owens; Elizabeth Jones
Subject: COA Contact Us: Safeway
Attachments: ATT00001.txt

COA Contact Us: Mayor, Vice Mayor, and Council Members

Time: [Wed Nov 30, 2011 08:54:28] Message ID: [34997]

Issue Type: Mayor, Vice Mayor, and Council Members
First Name: Sarah
Last Name: Constant
Street Address: 3706 Seminary Road
City: alexandria
State: VA
Zip: 22304
Phone: 7036832744
Email Address: sarahconstant@me.com
Subject: Safeway

I am writing to express my support for the new Safeway store at Bradlee and

King Streets. I think the proposed design and store offerings will

fill a significant need for this community and offer competitively priced

groceries.

Comments:

I do hope that as part of the City's review process, they

will insure adequate lighting for all parking areas is included. I

believe Safeway has failed to adequately maintain and light the existing parking lot.

Thank you.

Docket Item #5 A-D
MPA #2011-0007
REZ #2011-0001
DSUP #2011-0015
SUP/TMP #2011-0060

Jackie Henderson

From: John Budde <jabudde@comcast.net>
Sent: Wednesday, November 30, 2011 9:34 AM
To: William Euille; Frank Fannon; Kerry Donley; Alicia Hughes; Del Pepper; Paul Smedberg; Rose Boyd; Jackie Henderson; Rob Krupicka; Linda Owens; Elizabeth Jones
Subject: COA Contact Us: Safeway at Braddock and King
Attachments: ATT00001.txt

COA Contact Us: Mayor, Vice Mayor, and Council Members

Time: [Wed Nov 30, 2011 09:33:50] Message ID: [34998]

Issue Type: Mayor, Vice Mayor, and Council Members
First Name: John
Last Name: Budde
Street Address: 3737 Seminary Road
City: Alexandria
State: VA
Zip: 22304
Phone: 703-751-4798
Email Address: jabudde@comcast.net
Subject: Safeway at Braddock and King
I want to express my support for the new store. As an Alexandria resident for the past 33 years, I have seen a lot of development that I question. This isn't one of them. There is already a Safeway on the property. A small, old-fashioned store badly in need of replacement. Nearly everyone I know shops there, at least now and then. Why not give us a new, modern store that will really meet the needs of the neighborhood?

Julie Fuerth

From: Jackie Henderson
Sent: Wednesday, November 30, 2011 3:04 PM
To: Julie Fuerth
Subject: FW: COA Contact Us: We support the new Bradless Lifestyle Safeway
Attachments: ATT00001.txt

From: Ianthe Zabel [<mailto:ianthezabel@gmail.com>]
Sent: Wednesday, November 30, 2011 2:55 PM
To: William Euille; Frank Fannon; Kerry Donley; Alicia Hughes; Del Pepper; Paul Smedberg; Rose Boyd; Jackie Henderson; Rob Krupicka; Linda Owens; Elizabeth Jones
Subject: COA Contact Us: We support the new Bradless Lifestyle Safeway

COA Contact Us: Mayor, Vice Mayor, and Council Members

Time: [Wed Nov 30, 2011 14:54:56] Message ID: [35021]

Issue Type: Mayor, Vice Mayor, and Council Members
First Name: Ianthe
Last Name: Zabel
Street Address: 1322 Bayliss Dr
City: Alexandria
State: VA
Zip: 22302
Phone:
Email Address: ianthezabel@gmail.com
Subject: We support the new Bradless Lifestyle Safeway
I'm writing to voice my support for the proposed "lifestyle"
Comments: safeway in the bradlee location. It would definitely enhance the area and
would be great for the neighborhood. The current Safeway is outdated!

Julie Fuerth

From: Jackie Henderson
Sent: Wednesday, November 30, 2011 12:46 PM
To: Julie Fuerth
Subject: FW: COA Contact Us: new bradlee " lifestyle" safeway
Attachments: ATT00001.txt

From: Barry Dunn [<mailto:barry@bdaoffice.com>]
Sent: Wednesday, November 30, 2011 12:08 PM
To: William Euille; Frank Fannon; Kerry Donley; Alicia Hughes; Del Pepper; Paul Smedberg; Rose Boyd; Jackie Henderson; Rob Krupicka; Linda Owens; Elizabeth Jones
Subject: COA Contact Us: new bradlee " lifestyle" safeway

COA Contact Us: Mayor, Vice Mayor, and Council Members

Time: [Wed Nov 30, 2011 12:08:23] Message ID: [35014]

Issue Type: Mayor, Vice Mayor, and Council Members
First Name: Barry
Last Name: Dunn
Street Address: 715 timber branch drive
alexandria, va 22302
City: Alexandria
State: VA
Zip: 22302-3623
Phone: 703 6834040
Email Address: barry@bdaoffice.com
Subject: new bradlee " lifestyle" safeway
i support the new bradlee " lifestyle " safeway - i am an
alexandria resident since 1981 & have shopped at
the bradlee shopping
Comments: center since then - improving the shopping opportunities for residents is
necessary
both for business & quality of life reasons
please approve
this project

Julie Fuerth

From: Julie Fuerth
Sent: Wednesday, November 30, 2011 6:25 PM
To: hoagies04@yahoo.com
Cc: Kendra Jacobs; Graciela Moreno; Cicely Woodrow
Subject: COA Contact Us: lifestyle Safeway at bradlee center

Dear Mr. Hoag

Thank you for submitting comments regarding the Bradlee Safeway. By copy of this email, I'm forwarding your message to the appropriate Development staff and Kendra Jacobs, Administrative Staff to the Planning Commission who will make your comments available to the Planning Commission as part of the official record, which will also go to City Council. This project is currently on the Planning Commission Docket for December 6 and on the Preliminary Docket for City Council on December 17. You are welcome to attend these meetings.

Best regards,
Julie Fuerth

From: david hoag [<mailto:hoagies04@yahoo.com>]
Sent: Tuesday, November 29, 2011 8:40 PM
To: PnZFeedback; Cicely Woodrow; Graciela Moreno
Subject: COA Contact Us: lifestyle Safeway at bradlee center

COA Contact Us: Planning and Zoning General Feedback

Time: [Tue Nov 29, 2011 20:40:14] Message ID: [34993]

Issue Type: Planning and Zoning General Feedback
First Name: david
Last Name: hoag
Street Address: 806 crescent dr.
City: alexandria
State: va
Zip: 22302
Phone: 703-836-1806
Email Address: hoagies04@yahoo.com
Subject: lifestyle Safeway at bradlee center
I support the new Safeway proposal to be built at the Bradlee
Comments: center.
Thank you

James Hurysz
2863 South Abingdon Street
Arlington VA 22206

November 28, 2011

Rosalind Jordan
President,
Fairlington Citizens Association, Incorporated
PO Box 6182
Arlington VA 22206

Re: Redevelopment In and Around Fairlington

Dear Ms. Jordan:

Please note that the stated positions of the Fairlington Citizens Association, Incorporated, regarding development and redevelopment in and around Fairlington do not necessarily reflect the views of a majority of Fairlington residents. In fact, Fairlington residents usually know nothing about the FCA's positions and agenda until they appear in your monthly newsletter. I and other Fairlington residents are increasingly distressed that FCA appears to be primarily interested in featuring elected officials seeking re-election at FCA's monthly meetings.

I and other Fairlington residents do not want more single-occupant vehicles in Fairlington as the result of redevelopment. Instead, we want a comprehensive program of traffic mitigation, including ride sharing, ART buses, shuttle buses, increased use of school buses to transport students, telecommuting, and home shopping.

We also do not want more redevelopment near Fairlington planned like Shirlington, which has massive parking garages but no affordable housing, no public recreation center, no community center, and no sports infrastructure.

We do not want to see Fairlington become another "redevelopment opportunity" for out-of-state REITs, corporations, planners, and developers. As you may be aware, planning staff members who are not Arlington residents (Economic Development Director, CPHD Director) facilitate redevelopment planning in Arlington County.

Next year a typical townhouse owner will pay \$8,000 in condo fees and real estate taxes to live in Fairlington. We need and deserve a FCA Board of Directors that will preserve and protect our quality-of-life in our historic community.

Docket Item #5 A-D
MPA #2011-0007
REZ #2011-0001
DSUP #2011-0015
SUP/TMP #2011-0060

Julie Fuerth

From: Julie Fuerth
Sent: Tuesday, December 06, 2011 12:33 PM
To: cben456@aol.com
Cc: Graciela Moreno; Cicely Woodrow
Subject: RE: COA Contact Us: Safeway

Dear Mr. Benner,

Thank you for submitting comments regarding the Safeway on King Street. By copy of this email, I'm forwarding your message to the appropriate Development staff and Kendra Jacobs, Administrative Staff to the Planning Commission who will make your comments available to the Planning Commission as part of the official record, which will also go to City Council. This project is currently on the Planning Commission Docket for December 6 and on the Preliminary Docket for City Council on December 17. You are welcome to attend these meetings.

Best regards,
Julie Fuerth

From: Chris Benner [<mailto:cben456@aol.com>]
Sent: Monday, December 05, 2011 8:17 PM
To: William Euille; Frank Fannon; Kerry Donley; Alicia Hughes; Del Pepper; Paul Smedberg; Rose Boyd; Jackie Henderson; Rob Krupicka; Linda Owens; Elizabeth Jones
Subject: COA Contact Us: Safeway

COA Contact Us: Mayor, Vice Mayor, and Council Members

Time: [Mon Dec 05, 2011 20:17:26] Message ID: [35124]

Issue Type: Mayor, Vice Mayor, and Council Members
First Name: Chris
Last Name: Benner
Street Address: 1511 N Rolfe ST #103
City: Arlington
State: VA
Zip: 22209
Phone: 7035938922
Email Address: cben456@aol.com
Subject: Safeway
Comments: I support the plans for a NEW Bradlee Lifestyle Safeway!

Julie Fuerth

From: Julie Fuerth
Sent: Tuesday, December 06, 2011 12:30 PM
To: natalie.riegel3@gmail.com
Cc: Graciela Moreno; Cicely Woodrow
Subject: RE: COA Contact Us: New Lifestyle Safeway at Bradlee Center

Dear Ms. Riegel,

Thank you for submitting comments regarding the Bradlee Safeway. By copy of this email, I'm forwarding your message to the appropriate Development staff and Kendra Jacobs, Administrative Staff to the Planning Commission who will make your comments available to the Planning Commission as part of the official record, which will also go to City Council. This project is currently on the Planning Commission Docket for December 6 and on the Preliminary Docket for City Council on December 17. You are welcome to attend these meetings.

Best regards,
Julie Fuerth

From: Natalie Riegel [<mailto:natalie.riegel3@gmail.com>]
Sent: Monday, December 05, 2011 6:26 PM
To: PnZFeedback; Cicely Woodrow; Graciela Moreno
Subject: COA Contact Us: New Lifestyle Safeway at Bradlee Center

COA Contact Us: Planning and Zoning General Feedback

Time: [Mon Dec 05, 2011 18:26:13] Message ID: [35116]

Issue Type: Planning and Zoning General Feedback
First Name: Natalie
Last Name: Riegel
Street Address: 3816 White Post Court
City: Alexandria
State: VA
Zip: 22304
Phone: 7034618855
Email Address: natalie.riegel3@gmail.com
Subject: New Lifestyle Safeway at Bradlee Center
I am a resident of the City of Alexandria, and I frequently shop at the
Bradlee Center Safeway, as well as other city grocery stores. The
Safeway
Comments: is a great store, with good food and helpful people. I am writing in
support of the new Lifestyle Safeway that the company has planned for the
site. I think it would be good for the neighborhood, good for shoppers,

and good for the City! Please approve it. Thank you.

Julie Fuerth

From: Jackie Henderson
Sent: Tuesday, December 06, 2011 7:50 AM
To: Julie Fuerth
Subject: FW: COA Contact Us: Support for new Lifestyle Safeway
Attachments: ATT00001.txt

From: Darren Silvis [<mailto:darrensilvis@gmail.com>]
Sent: Monday, December 05, 2011 7:43 PM
To: William Euille; Frank Fannon; Kerry Donley; Alicia Hughes; Del Pepper; Paul Smedberg; Rose Boyd; Jackie Henderson; Rob Krupicka; Linda Owens; Elizabeth Jones
Subject: COA Contact Us: Support for new Lifestyle Safeway

COA Contact Us: Mayor, Vice Mayor, and Council Members

Time: [Mon Dec 05, 2011 19:42:59] Message ID: [35123]

Issue Type: Mayor, Vice Mayor, and Council Members
First Name: Darren
Last Name: Silvis
Street Address: 3307 Wyndham Circle #1165
City: Alexandria
State: VA
Zip: 22302
Phone: 703-798-8386
Email Address: darrensilvis@gmail.com
Subject: Support for new Lifestyle Safeway
Dear Mayor Euille and members of the City Council,

I write in support of
the proposed Lifestyle Safeway at the intersection of King Street and
Braddock Road. As
a frequent shopper to the current Safeway, I would be
grateful if the Council approved Safeway's proposal
for this new project.

Comments: The City of Alexandria is fortunate to be afforded the opportunity for
businesses to grow
and develop, and this new Safeway will give area
residents an even more accessible and more pleasurable
shopping
experience. It is my hope that the Council agrees and will be
accommodating to and work with the
Safeway planners on ensuring a smooth

planning and construction process.

Thank you,
Darren Silvis

Julie Fuerth

From: Jackie Henderson
Sent: Tuesday, December 06, 2011 7:50 AM
To: Julie Fuerth
Subject: FW: COA Contact Us: Safeway
Attachments: ATT00001.txt

From: Chris Benner [<mailto:cben456@aol.com>]
Sent: Monday, December 05, 2011 8:17 PM
To: William Eulle; Frank Fannon; Kerry Donley; Alicia Hughes; Del Pepper; Paul Smedberg; Rose Boyd; Jackie Henderson; Rob Krupicka; Linda Owens; Elizabeth Jones
Subject: COA Contact Us: Safeway

COA Contact Us: Mayor, Vice Mayor, and Council Members

Time: [Mon Dec 05, 2011 20:17:26] Message ID: [35124]

Issue Type: Mayor, Vice Mayor, and Council Members
First Name: Chris
Last Name: Benner
Street Address: 1511 N Rolfe ST #103
City: Arlington
State: VA
Zip: 22209
Phone: 7035938922
Email Address: cben456@aol.com
Subject: Safeway
Comments: I support the plans for a NEW Bradlee Lifestyle Safeway!

Julie Fuerth

Docket Item #5 A-D
MPA #2011-0007
REZ #2011-0001
DSUP #2011-0015
SUP/TMP #2011-0060

From: Jackie Henderson
Sent: Tuesday, December 06, 2011 1:32 PM
To: Julie Fuerth
Subject: FW: COA Contact Us: New Bradlee "Lifestyle" Safeway
Attachments: ATT00001.txt

From: Robin Fennessy [<mailto:carringtonr@comcast.net>]
Sent: Tuesday, December 06, 2011 1:23 PM
To: William Euille; Frank Fannon; Kerry Donley; Alicia Hughes; Del Pepper; Paul Smedberg; Rose Boyd; Jackie Henderson; Rob Krupicka; Linda Owens; Elizabeth Jones
Subject: COA Contact Us: New Bradlee "Lifestyle" Safeway

COA Contact Us: Mayor, Vice Mayor, and Council Members

Time: [Tue Dec 06, 2011 13:22:30] Message ID: [35143]

Issue Type: Mayor, Vice Mayor, and Council Members
First Name: Robin
Last Name: Fennessy
Street Address: 808 Junior Street
City: Alexandria
State: VA
Zip: 22301
Phone: 703-549-6091
Email Address: carringtonr@comcast.net
Subject: New Bradlee "Lifestyle" Safeway
Comments: Wanted you to know that I hope that you support the building of the new "Lifestyle" Safeway proposed for Bardlee Shopping Center. With its expanded shopping space and underground parking, I think it will make an excellent addition to the Bradlee Shopping Mall.

Julie Fuerth

From: Jackie Henderson
Sent: Tuesday, December 06, 2011 1:16 PM
To: Julie Fuerth
Subject: FW: COA Contact Us: New Safeway
Attachments: ATT00002.txt

From: Vincent Caruso [<mailto:vicinalex2009@hotmail.com>]
Sent: Tuesday, December 06, 2011 1:10 PM
To: William Euille; Frank Fannon; Kerry Donley; Alicia Hughes; Del Pepper; Paul Smedberg; Rose Boyd; Jackie Henderson; Rob Krupicka; Linda Owens; Elizabeth Jones
Subject: COA Contact Us: New Safeway

COA Contact Us: Mayor, Vice Mayor, and Council Members

Time: [Tue Dec 06, 2011 13:10:19] Message ID: [35141]

Issue Type: Mayor, Vice Mayor, and Council Members
First Name: Vincent
Last Name: Caruso
Street Address: 1408 Coventry Ln
City: Alexandria
State: VA
Zip: 22304
Phone: 703 461 9340
Email Address: vicinalex2009@hotmail.com

Subject: New Safeway

I would like the council to know that my wife and I wholeheartedly support
the building of the Lifestyle Safeway at KingSt and Quaker Ln.
We request

Comments: you approve the plans to do so.

Thank you,
Vincent Caruso

Docket Item #5 A-D
MPA #2011-0007
REZ #2011-0001
DSUP #2011-0015
SUP/TMP #2011-0060

Julie Fuerth

From: Jackie Henderson
Sent: Tuesday, December 06, 2011 1:36 PM
To: Julie Fuerth
Subject: FW: COA Contact Us: Lifestyle Safeway
Attachments: ATT00001.txt

From: Christopher Ballard [<mailto:cballard@mcwilliamsballard.com>]
Sent: Tuesday, December 06, 2011 1:35 PM
To: William Eulle; Frank Fannon; Kerry Donley; Alicia Hughes; Del Pepper; Paul Smedberg; Rose Boyd; Jackie Henderson; Rob Krupicka; Linda Owens; Elizabeth Jones
Subject: COA Contact Us: Lifestyle Safeway

COA Contact Us: Mayor, Vice Mayor, and Council Members

Time: [Tue Dec 06, 2011 13:34:35] Message ID: [35146]

Issue Type: Mayor, Vice Mayor, and Council Members
First Name: Christopher
Last Name: Ballard
Street Address: 1904 Russell Road
City: Alexandria
State: Virginia
Zip: 22301
Phone: 7036837011
Email Address: cballard@mcwilliamsballard.com
Subject: Lifestyle Safeway
I would like to express my support for the Lifestyle Safeway to be redeveloped.
Comments: Thank you,
Chris Ballard

Julie Fuerth

Docket Item #5 A-D
MPA #2011-0007
REZ #2011-0001
DSUP #2011-0015
SUP/TMP #2011-0060

From: Cicely Woodrow
Sent: Tuesday, December 06, 2011 2:46 PM
To: 'Vincent Caruso'
Cc: Graciela Moreno; Kendra Jacobs; Julie Fuerth
Subject: RE: COA Contact Us: New Safeway

Dear Mr. Caruso,

Thank you for submitting comments regarding the Bradlee Safeway. By copy of this email, I'm forwarding your message to the appropriate Development staff and Kendra Jacobs, Administrative Staff to the Planning Commission who will make your comments available to the Planning Commission as part of the official record, which will also go to City Council. This project is currently on the Planning Commission Docket for December 6 and on the Preliminary Docket for City Council on December 17. You are welcome to attend these meetings.

Best regards,
Julie Fuerth

Cicely B. Woodrow, PHR
Management Analyst III
Department of Planning & Zoning
301 King Street, Room 2100
Alexandria, Virginia 22314
Direct: 703-746-3810
Fax: 703-838-6393

ECO-CITY  **ALEXANDRIA**

In keeping with Eco-City Alexandria please consider the environment before printing this e-mail, print on paper certified for sustainability, and save energy by turning off your computer and printer at night.

From: Vincent Caruso [<mailto:vjcinalex2009@hotmail.com>]
Sent: Tuesday, December 06, 2011 1:05 PM
To: PnZFeedback; Cicely Woodrow; Graciela Moreno
Subject: COA Contact Us: New Safeway

COA Contact Us: Planning and Zoning General Feedback

Time: [Tue Dec 06, 2011 13:05:21] Message ID: [35139]

Issue Type: Planning and Zoning General Feedback
First Name: Vincent
Last Name: Caruso
Street Address: 1408 Coventry Lane
City: Alexandria
State: VA

Zip: 22304

Phone: 703 461 9340

Email Address: vicinalex2009@hotmail.com

Subject: New Safeway

I hereby request that the Planning Commission approve the plans for the

Comments:

Lifestyle Safeway at the intersection of N Quaker Ln and King St.